



SLIMDUET (EU) system

# SLIMDUET

Ultimate slim, perfect style


Innovative slim linear connecting system, a perfect combination between tracks and LED fixtures. Not only emphasizing on characteristics and rapid installation of the modules, also creates simple and clean appearance. Unique designed spot, panel and downlight modules are available for multitasking lighting requirement to the area. This is a perfect solution to maximize lighting creativity.




ETL Approved

# SLIMDUET


## SLIMDUET TRACK



SDT Surface mounted & Pendant track P.15




SDR Trimless recessed track P.15



SDF Trim recessed track P.15

## SLIMDUET MODULES

|                                                                                     |                                                                                     |             |                        |                                     |      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------|------------------------|-------------------------------------|------|
|    |    | Series name | LED Consumption        | Lumen                               | P.23 |
|                                                                                     |                                                                                     | SLIMDUET-K  | 11W<br>22W<br>33W      | 1000 (lm)<br>2000 (lm)<br>3000 (lm) |      |
|    |    | Series name | LED Consumption        | Lumen                               | P.25 |
|                                                                                     |                                                                                     | SLIMDUET-P  | 9.2W<br>18.4W<br>27.5W | 472 (lm)<br>1197 (lm)<br>1428 (lm)  |      |
|    |    | Series name | LED Consumption        | Lumen                               | P.27 |
|                                                                                     |                                                                                     | SLIMDUET-W  | 11W                    | 462 (lm)                            |      |
|    |    | Series name | LED Consumption        | Lumen                               | P.29 |
|                                                                                     |                                                                                     | SLIMDUET-S  | 6.4W<br>13.4W          | 656 (lm)<br>1207 (lm)               |      |
|   |  | Series name | LED Consumption        | Lumen                               | P.31 |
|                                                                                     |                                                                                     | SLIMDUET-GR | 4.6W                   | 214(lm)                             |      |
|  |  | Series name | LED Consumption        | Lumen                               | P.33 |
|                                                                                     |                                                                                     | SLIMDUET-GL | 4.6W                   | 399 (lm)                            |      |
|  |  | Series name | LED Consumption        | Lumen                               | P.35 |
|                                                                                     |                                                                                     | SLIMDUET-C  | 6.4W<br>6.4W           | 656 (lm)<br>656 (lm)                |      |
|  |  | Series name | LED Consumption        | Lumen                               | P.37 |
|                                                                                     |                                                                                     | SLIMDUET-KC | 22W                    | 2000 (lm)                           |      |
|  |  | Series name | LED Consumption        | Lumen                               | P.39 |
|                                                                                     |                                                                                     | SLIMDUET-KS | 11W                    | 1000 (lm)                           |      |




## SLIMDUET


Slim linear connecting system, can be recessed, surface mounted or pendant. Suitable for all kinds of interior environment.

The LED modules are designed with simple linear style, each series perform its own function, making lighting design easier than ever.


SLIMDUET

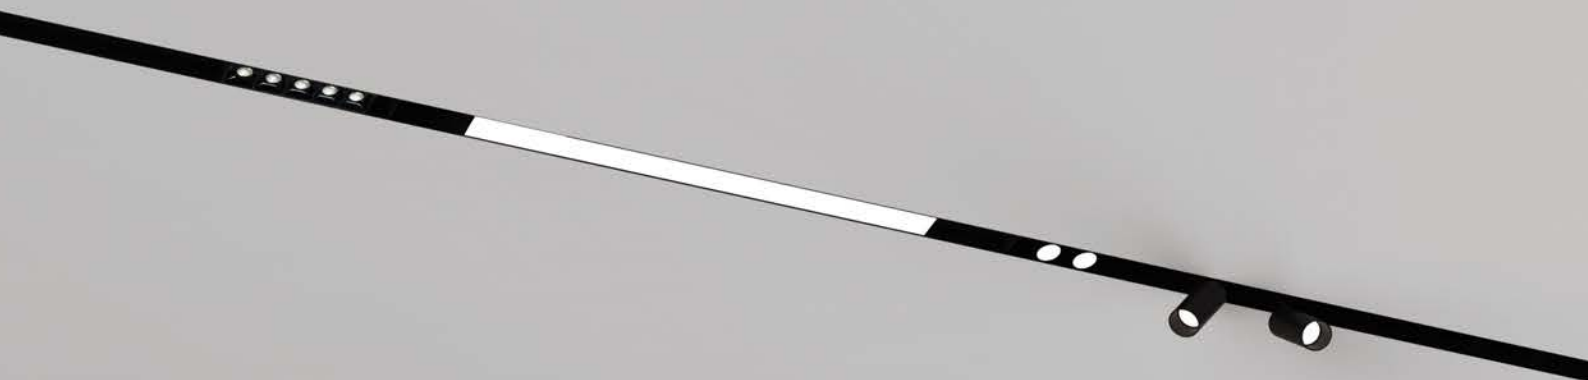


Recessed




Surface mounted



Pendant




SLIMDUET

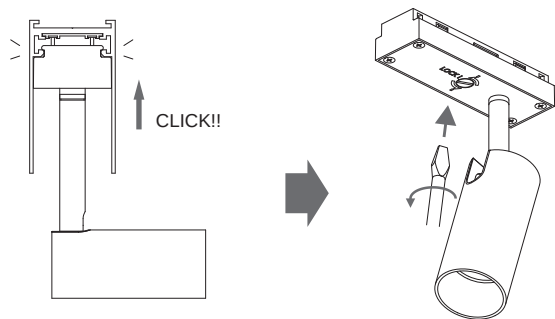


LED fixture installation is designed to be simple and convenient, just plug and play, tools-free, significant savings on installation and maintenance. The track cover can be moved or cut to fit with the LED fixture to make overall appearance succinct.


Track section

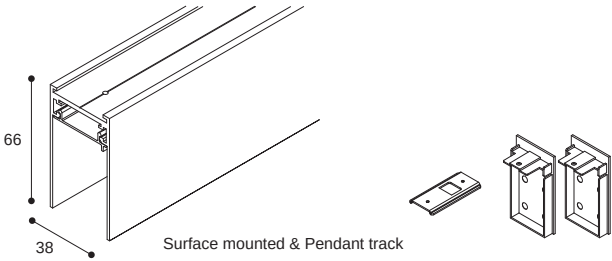

Surface mounted & Pendant track

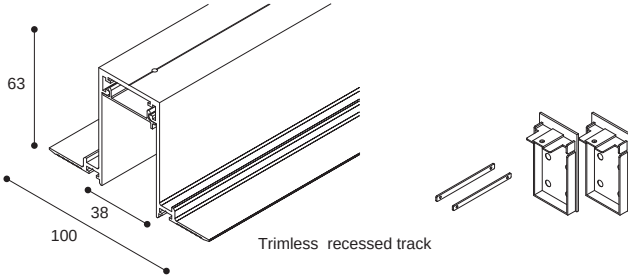

Trimless recessed track

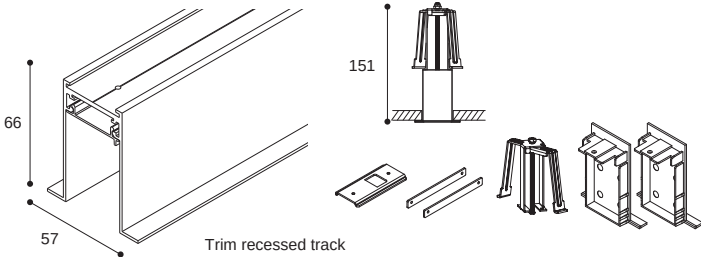

Trim recessed track



L

Product performance


| Article number | L      |
|----------------|--------|
| SDT-01         | 1500mm |
| SDT-02         | 2100mm |
| SDT-03         | 2500mm |

| Article number | L      |
|----------------|--------|
| SDR-01         | 1500mm |
| SDR-02         | 2100mm |
| SDR-03         | 2500mm |


| Article number | L      |
|----------------|--------|
| SDF-01         | 1500mm |
| SDF-02         | 2100mm |
| SDF-03         | 2500mm |

Colours  Black  White



Accessories




Article number: SDR-04  
Type : Trimless recessed vertical corner




Article number: SDF-04  
Type : Trim recessed vertical corner



Article number : SDR-05  
Type : Trimless recessed horizontal corner



Article number : SDT-05  
Type : Surface mounted & pendant horizontal corner




Article number : SDF-12  
Type : Trim recessed horizontal corner






# SLIMDUET

## INSTALLATION GUIDE



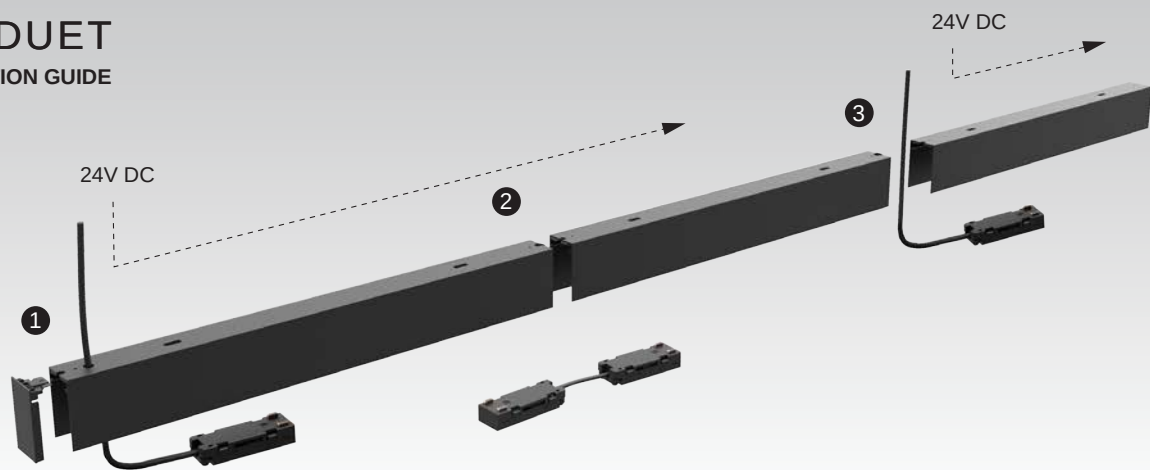


APPLICATION –  
connecting power in different conditions for continuous connection

### 1 Single Power, Single Track

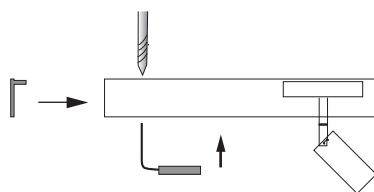



### 2 Single Power, Multiple Tracks

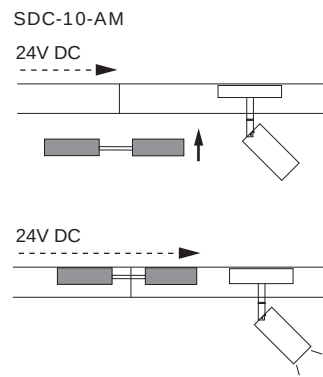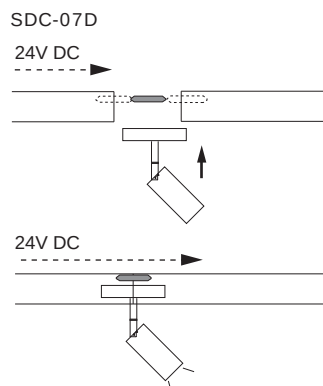

Using circuit joint (SDC-07D or SDC-10-AM ) to connect between tracks

### 3 Multiple Powers, Multiple Tracks

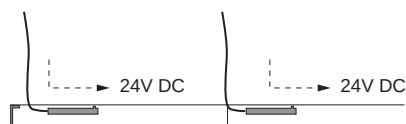


Using power joint (SDC-09) to connect more drivers


## ACCESSORIES

### Connections


---




Article number : SDC-04  
Type : Surface mounted & pendant  
& trimless recessed end cap  
without power cord




Article number : SDC-04A  
Type : Trim recessed end cap  
without power cord




Article number : SDC-09  
Type : Power joint  
Length : 200cm




Article number : SDC-10-AM  
Type : Circuit joint




Article number : SDC-07D  
Type : New circuit joint




Article number : SDC-05  
Type : Trim recessed & surface  
mounted reinforced joint



Article number : SDC-05A  
Type : Trimless recessed  
reinforced joint




Article number : SDC-06  
Type : Surface mounted & Pendant  
reinforced plate




Article number : SDI-10  
Type : Trim recessed clip

### Pendant

---




Article number : SDI-05  
Type : Pendant kit for power connection  
without power cord  
Length : 150cm



Article number : SDI-06  
Type : Pendant kit without  
power cord  
Length : 150cm

# SLIMDUET


## Application Illustration

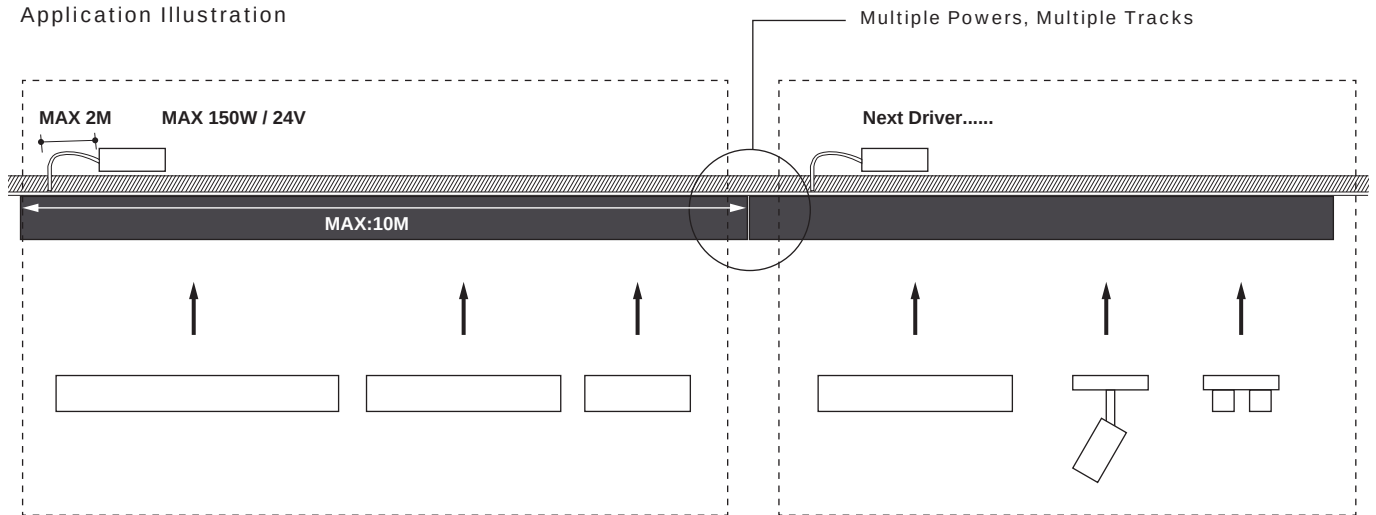



## NOTE:

1. Max wattage linkable per loop for 24VDC is 150W.
2. Max length of track linkable per loop is 10M , and the max cable length between driver and track is 2M.
3. Dimming modules are compatible to PWM dimming driver only.
4. To use drivers not on recommended list , it require compatibility test before installation.
5. Tracks allows continuous linkable without limitation, also can divide into sections to light up individual area, making lighting application easy as 123.
6. Minimum voltage per loop is 22VDC (measure at the end of the loop), under 22VDC per loop might cause abnormal.
7. Calculating max wattage connection, save 20% buffer for linear modules, and 25% buffer for other modules.
8. Use driver not in the recommended list might cause module flickering, unstable dimming and/or noise, even causing module failure.
9. When multiple drivers are use in the connection, make sure the connector without circuit is used to divide the loop.
10. When installation tracks (pipes), make sure measuring the voltage from SDC-09/SDC-10-AM with the driver connected first, without modules, to see if the voltage is 24VDC, then measure the track & SDC-09/SDC-10-AM to see if the voltage drop is  $\leq 0.1V$ , if the voltage drop is over 0.1V, make sure the connector is secured properly, warpage is not allowed in the connection, also check the cleanliness of the copper connector, copper connector can be cleaned using alcohol.

## Driver Installation

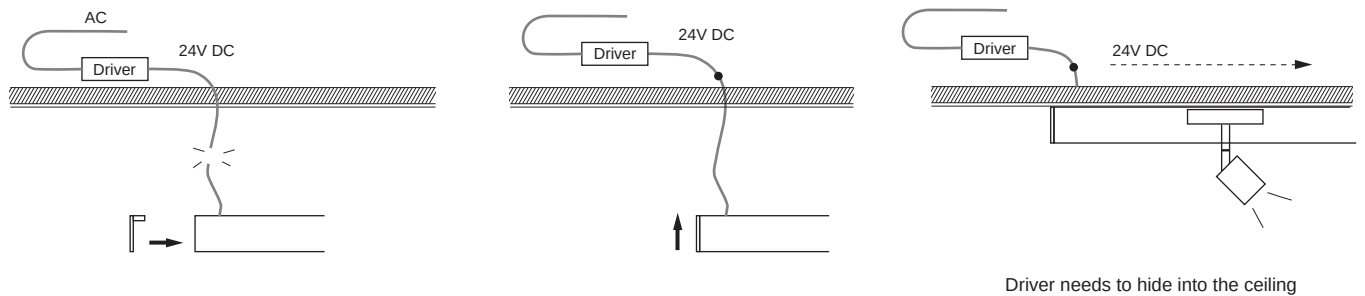

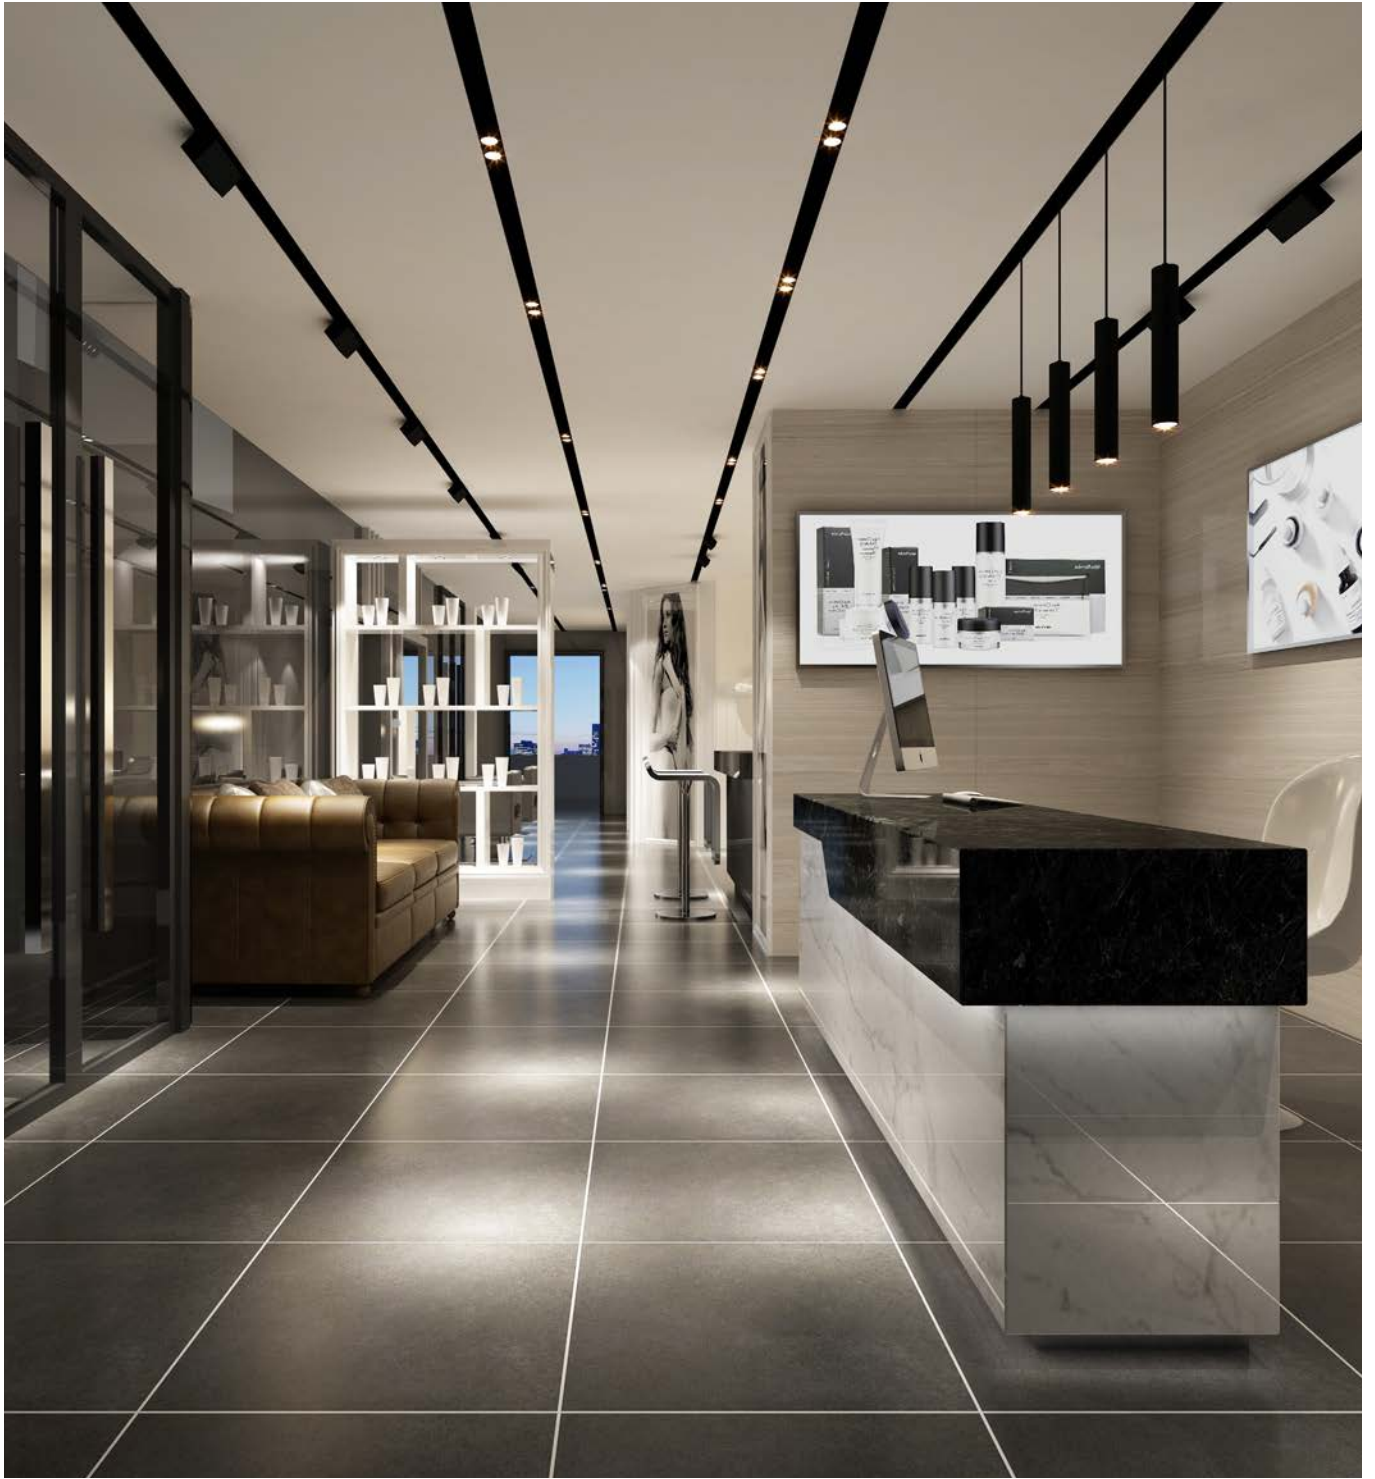

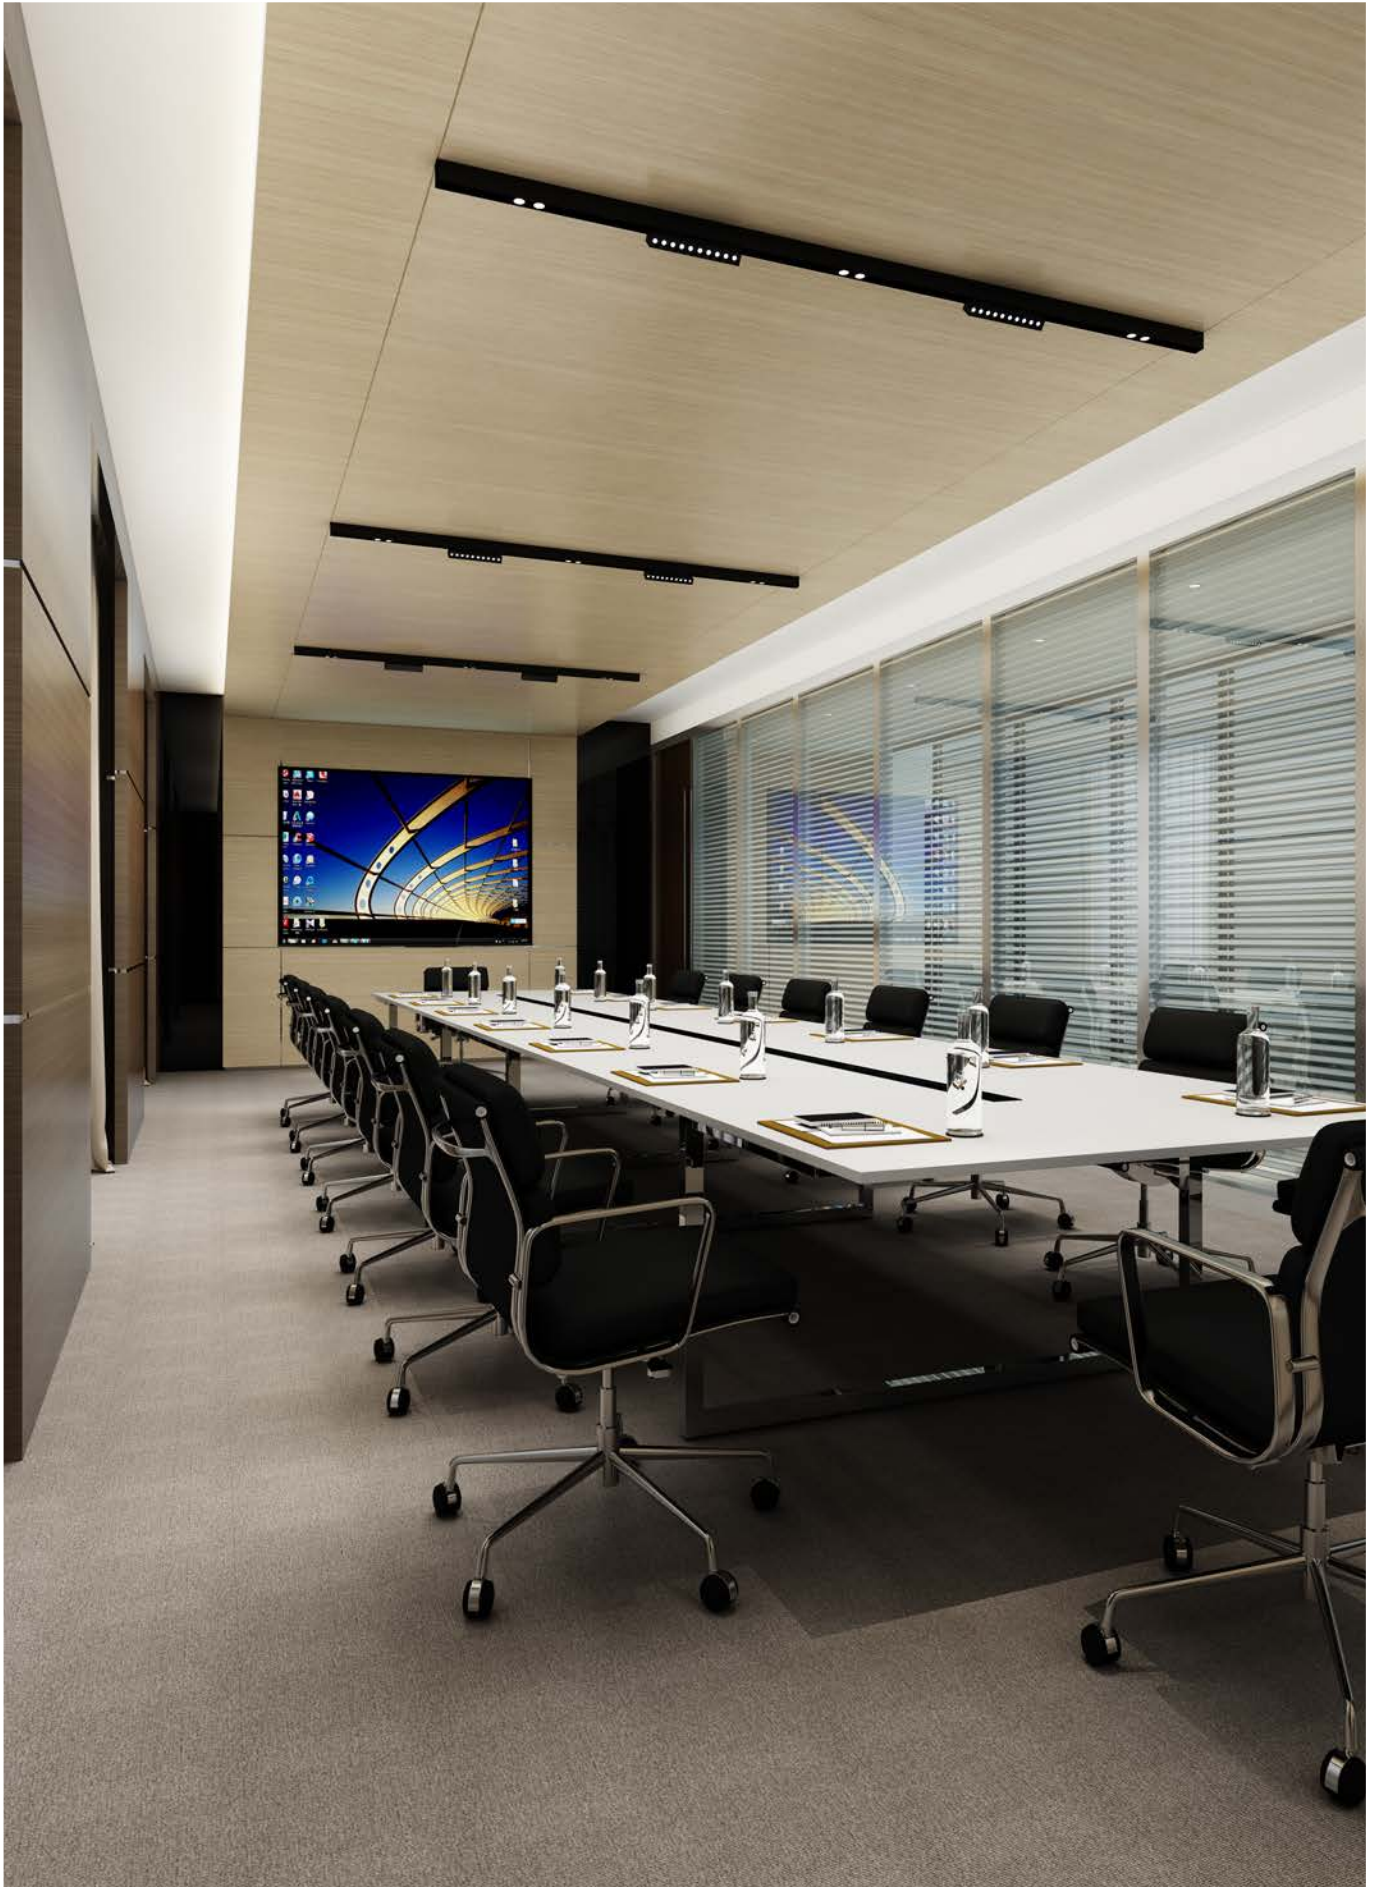





SLIMDUET








# SLIMDUET-K

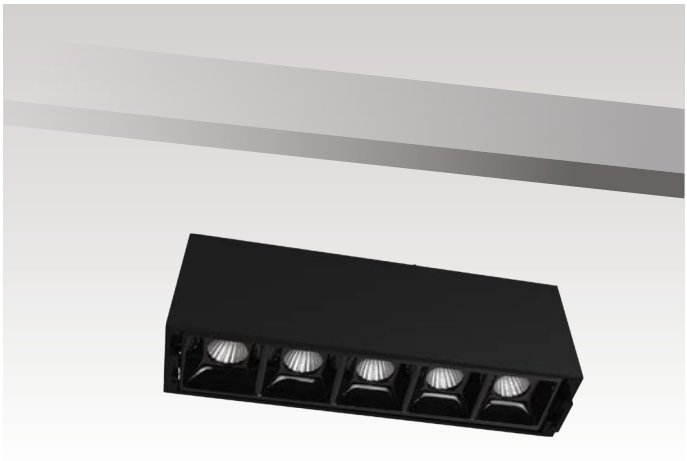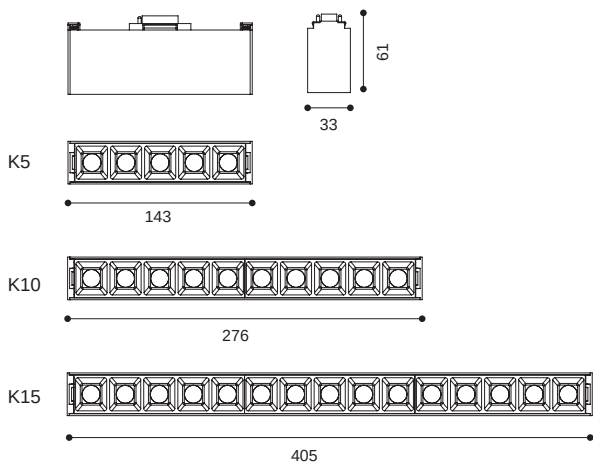


K5




| h(m) | D(m) | E(lx) |
|------|------|-------|
| 15°  |      |       |
| 1.0  | 0.25 | 7598  |
| 2.0  | 0.51 | 1899  |
| 3.0  | 0.76 | 844   |
| 4.0  | 1.02 | 474   |
| 5.0  | 1.28 | 303   |

K10



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 15°  |      |       |
| 1.0  | 0.29 | 11173 |
| 2.0  | 0.59 | 2793  |
| 3.0  | 0.88 | 1241  |
| 4.0  | 1.18 | 698   |
| 5.0  | 1.47 | 446   |

K15



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 15°  |      |       |
| 1.0  | 0.25 | 20028 |
| 2.0  | 0.51 | 5007  |
| 3.0  | 0.76 | 2225  |
| 4.0  | 1.02 | 1252  |
| 5.0  | 1.28 | 801   |

- Colours
- Black

White
- Baffle :
- Black

White

Piano black

## Product performance

### SLIMDUET-K5

| Article number | LED Consumption | Voltage | Lumen     | Beam Angle  | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------|-------------|---------|--------------|
| 1817.406A-V    | 11W             | 24V DC  | 1000 (lm) | 15°/30°/40° | 30/90+  | Push         |

### SLIMDUET-K10

| Article number | LED Consumption | Voltage | Lumen     | Beam Angle  | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------|-------------|---------|--------------|
| 1817.406B-V    | 22W             | 24V DC  | 2000 (lm) | 15°/30°/40° | 30/90+  | Push         |

### SLIMDUET-K15


| Article number | LED Consumption | Voltage | Lumen     | Beam Angle  | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------|-------------|---------|--------------|
| 1817.406C-V    | 33W             | 24V DC  | 3000 (lm) | 15°/30°/40° | 30/90+  | Push         |








## SLIMDUET-P Seamless Installation

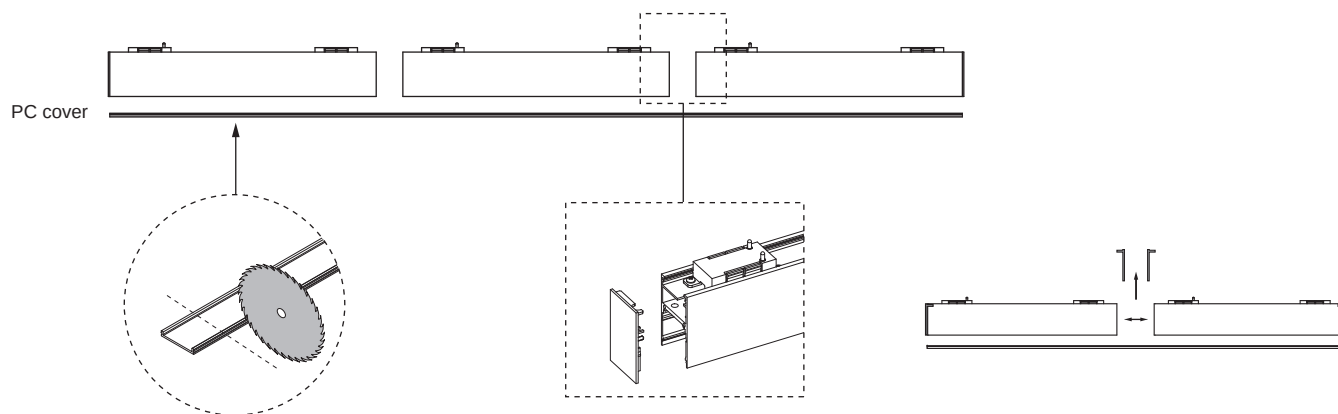

PC cover can be cut into required length

Remove the end cap from SLIMDUET-P module, the modules can be installed next to each other, then use longer PC cover to make seamless appearance.



Colours ☐ White



Product performance \_\_\_\_\_

Article number L \_\_\_\_\_


SDE-01 4000mm

SDE-02 15000mm

# SLIMDUET-P

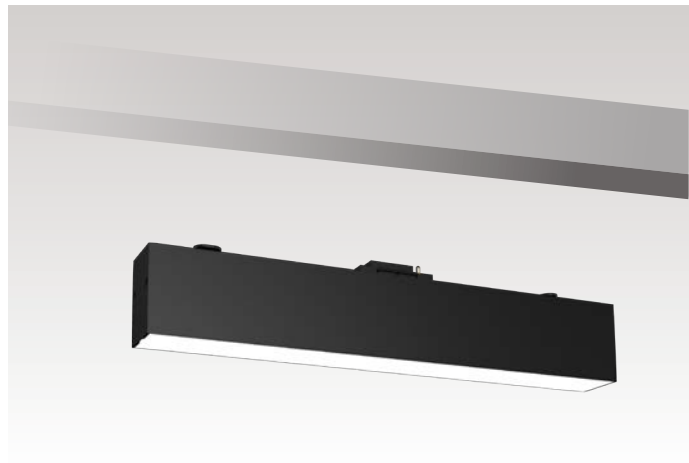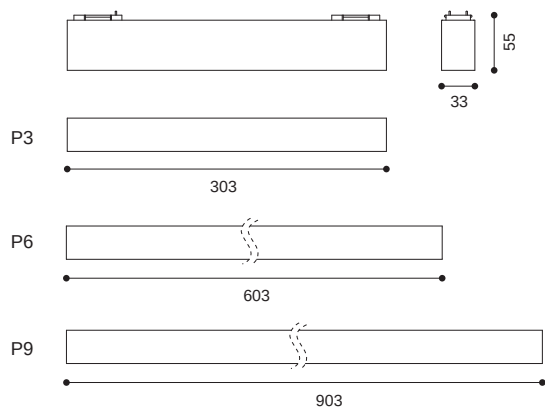


P3




| h(m) | D(m)  | E(lx) |
|------|-------|-------|
| 115° |       |       |
| 1.0  | 3.01  | 164   |
| 2.0  | 6.02  | 41    |
| 3.0  | 9.04  | 18    |
| 4.0  | 12.05 | 10    |
| 5.0  | 15.06 | 6     |

P6



| h(m) | D(m)  | E(lx) |
|------|-------|-------|
| 115° |       |       |
| 1.0  | 3.03  | 415   |
| 2.0  | 6.06  | 103   |
| 3.0  | 9.09  | 46    |
| 4.0  | 12.13 | 25    |
| 5.0  | 15.16 | 16    |

P9



| h(m) | D(m)  | E(lx) |
|------|-------|-------|
| 115° |       |       |
| 1.0  | 2.36  | 538   |
| 2.0  | 4.73  | 134   |
| 3.0  | 7.10  | 59    |
| 4.0  | 9.47  | 33    |
| 5.0  | 11.84 | 21    |

Colours  Black  White

## Product performance

### SLIMDUET-P3

| Article number | LED Consumption | Voltage | Delivered Lumen | Beam Angle | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------------|------------|---------|--------------|
| 1817.410A-V    | 9.2W            | 24V DC  | 472 (lm)        | 115°       | 30/80+  | Twist        |

### SLIMDUET-P6

| Article number | LED Consumption | Voltage | Delivered Lumen | Beam Angle | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------------|------------|---------|--------------|
| 1817.410B-V    | 18.4W           | 24V DC  | 1197 (lm)       | 115°       | 30/80+  | Twist        |

### SLIMDUET-P9

| Article number | LED Consumption | Voltage | Delivered Lumen | Beam Angle | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------------|------------|---------|--------------|
| 1817.410C-V    | 27.5W           | 24V DC  | 1428 (lm)       | 115°       | 30/80+  | Twist        |

CASAMBI




IP20






SLIMDUET-W



1817.407A-V

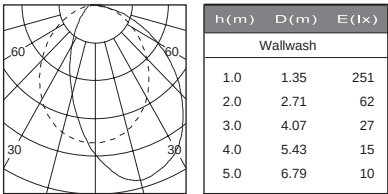

- Colours 

● Black

○ White
- Baffle : 

● Black



| Product performance |                 |         |                 |            |         |              |
|---------------------|-----------------|---------|-----------------|------------|---------|--------------|
| Article number      | LED Consumption | Voltage | Delivered Lumen | Beam Angle | CCT/CRI | Locking Type |
| 1817.407A-V         | 11W             | 24V DC  | 462 (lm)        | wallwash   | 30/90+  | Push         |








SLIMDUET-S

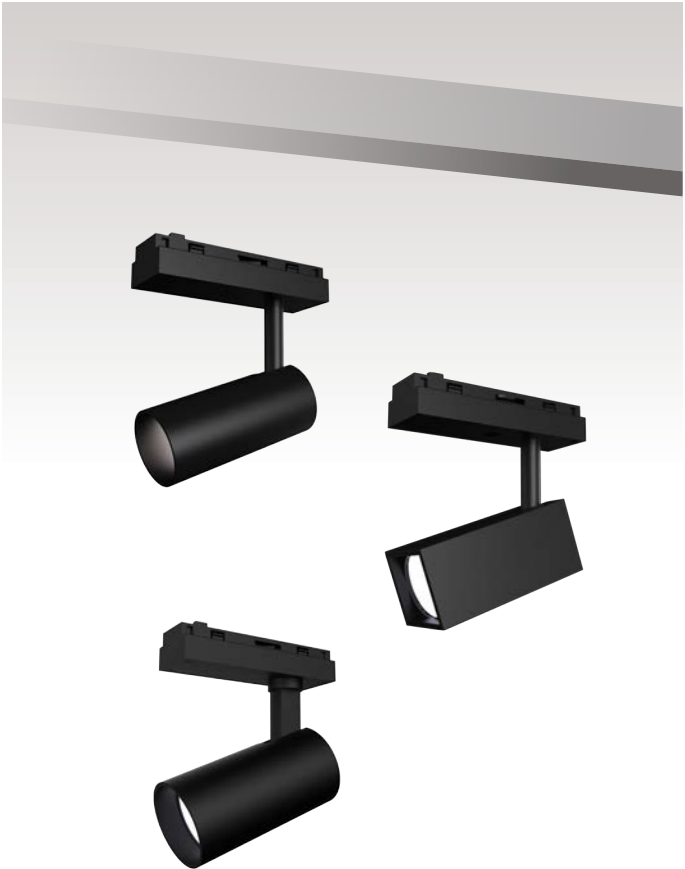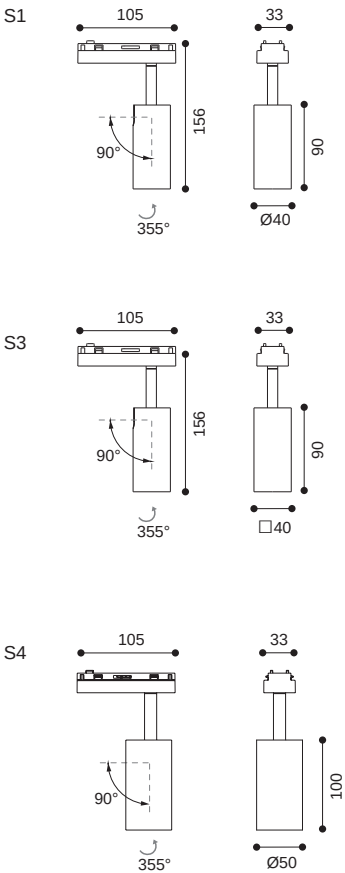

2117.405-V



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 25°  |      |       |
| 1.0  | 0.44 | 2860  |
| 2.0  | 0.89 | 715   |
| 3.0  | 1.33 | 317   |
| 4.0  | 1.77 | 178   |
| 5.0  | 2.22 | 114   |

- Colours
- Black White
- Baffle :
- Black White Copper

Product performance

SLIMDUET-S1


| Article number | LED Consumption | Voltage | Lumen    | Beam Angle  | CCT/CRI | Locking Type |
|----------------|-----------------|---------|----------|-------------|---------|--------------|
| 2117.462-V     | 6.4W            | 24V DC  | 656 (lm) | 20°/25°/36° | 30/90+  | Twist        |

SLIMDUET-S3

| Article number | LED Consumption | Voltage | Lumen    | Beam Angle  | CCT/CRI | Locking Type |
|----------------|-----------------|---------|----------|-------------|---------|--------------|
| 2117.463-V     | 6.4W            | 24V DC  | 656 (lm) | 18°/23°/35° | 30/90+  | Twist        |


SLIMDUET-S4

| Article number | LED Consumption | Voltage | Lumen     | Beam Angle  | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------|-------------|---------|--------------|
| 2117.461-V     | 13.4W           | 24V DC  | 1207 (lm) | 12°/20°/35° | 30/90+  | Twist        |






SLIMDUET-GR

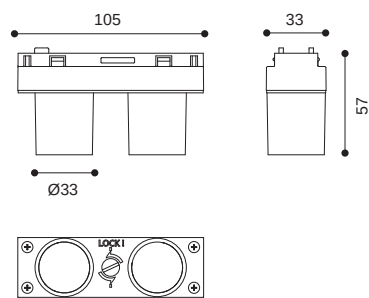

1817.401-V



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 90°  |      |       |
| 1.0  | 2    | 96    |
| 2.0  | 4    | 24    |
| 3.0  | 6    | 10    |
| 4.0  | 8    | 6     |
| 5.0  | 10   | 3     |

Colours    
Black White


Product performance

| Article number | LED Consumption | Voltage | Delivered Lumen | Beam Angle | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------------|------------|---------|--------------|
| 1817.401-V     | 4.6W            | 24V DC  | 214 (lm)        | 90°        | 30/90+  | Twist        |







SLIMDUET-GL

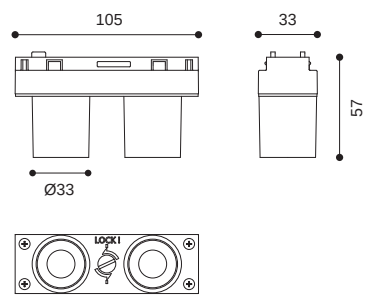

1617.409A



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 19°  |      |       |
| 1.0  | 0.34 | 2290  |
| 2.0  | 0.68 | 572   |
| 3.0  | 1.02 | 254   |
| 4.0  | 1.36 | 143   |
| 5.0  | 1.70 | 91    |



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 35°  |      |       |
| 1.0  | 0.62 | 753   |
| 2.0  | 1.25 | 188   |
| 3.0  | 1.88 | 83    |
| 4.0  | 2.51 | 47    |
| 5.0  | 3.14 | 30    |

- Colours 

Black

White
- Baffle : 

Black

White

Piano black

Product performance



| Article number | LED Consumption | Voltage | Lumen    | Beam Angle | CCT/CRI | Locking Type |
|----------------|-----------------|---------|----------|------------|---------|--------------|
| 1617.409A-V    | 4.6W            | 24V DC  | 399 (lm) | 19°/35°    | 30/90+  | Twist        |







SLIMDUET-C

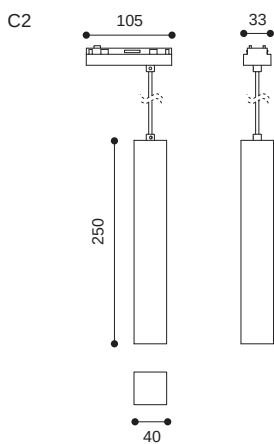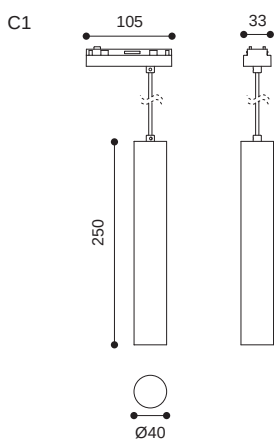

- Colours
- Black
- White
- Baffle :
- Black
- White
- Copper


Product performance

| SLIMDUET-C1    |                 |         |          |             |         |              |
|----------------|-----------------|---------|----------|-------------|---------|--------------|
| Article number | LED Consumption | Voltage | Lumen    | Beam Angle  | CCT/CRI | Locking Type |
| 2117.464-V     | 6.4W            | 24V DC  | 656 (lm) | 18°/23°/35° | 30/90+  | Twist        |
| SLIMDUET-C2    |                 |         |          |             |         |              |
| Article number | LED Consumption | Voltage | Lumen    | Beam Angle  | CCT/CRI | Locking Type |
| 2117.465-V     | 6.4W            | 24V DC  | 656 (lm) | 18°/23°/35° | 30/90+  | Twist        |







SLIMDUET-KC

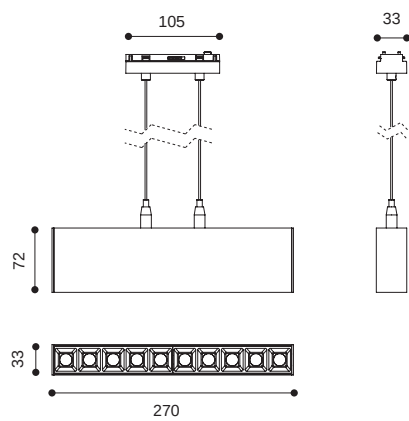


1817.411-V



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 15°  |      |       |
| 1.0  | 0.26 | 12704 |
| 2.0  | 0.52 | 3176  |
| 3.0  | 0.78 | 1412  |
| 4.0  | 1.05 | 794   |
| 5.0  | 1.31 | 508   |



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 25°  |      |       |
| 1.0  | 0.40 | 6526  |
| 2.0  | 0.81 | 1632  |
| 3.0  | 1.22 | 725   |
| 4.0  | 1.62 | 407   |
| 5.0  | 2.03 | 261   |



| h(m) | D(m) | E(lx) |
|------|------|-------|
| 40°  |      |       |
| 1.0  | 0.68 | 3318  |
| 2.0  | 1.36 | 829   |
| 3.0  | 2.04 | 368   |
| 4.0  | 2.72 | 207   |
| 5.0  | 3.40 | 132   |

- Colours 

Black

White
- Baffle : 

Black

White

Piano black

Product performance



| Article number | LED Consumption | Voltage | Lumen     | Beam Angle  | CCT/CRI | Locking Type |
|----------------|-----------------|---------|-----------|-------------|---------|--------------|
| 1817.411-V     | 22W             | 24V DC  | 2000 (lm) | 15°/25°/40° | 30/90+  | Twist        |








SLIMDUET-KS

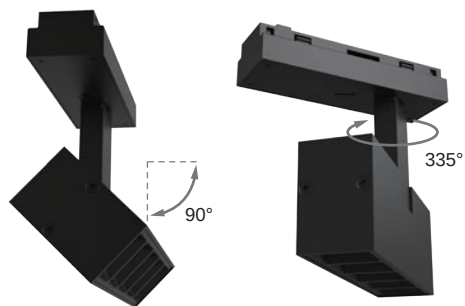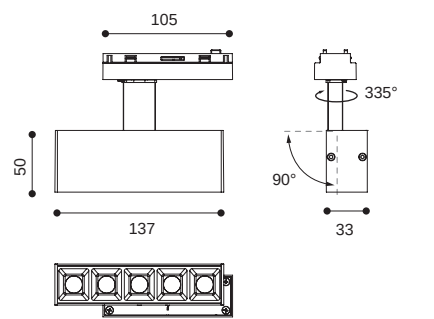

1817.413

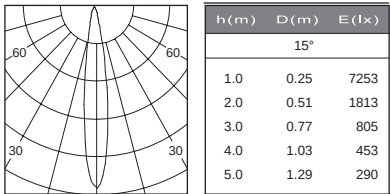

- Colours ☒ Black ☐ White
- Baffle : ☒ Black ☐ White ☐ Piano black

| Product performance |                 |         |           |             |         |              |
|---------------------|-----------------|---------|-----------|-------------|---------|--------------|
| Article number      | LED Consumption | Voltage | Lumen     | Beam Angle  | CCT/CRI | Locking Type |
| 1817.413-V          | 11W             | 24V DC  | 1000 (lm) | 15°/30°/40° | 30/90+  | Twist        |

