

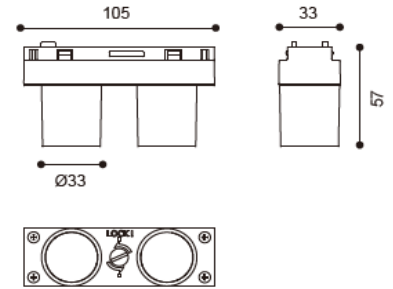
## SLIMDUET-GR



## Product specification

**INTERIOR SYSTEM LIGHT**

Installation	system light
Cut out	-
Dimension	D=Ø33 105x33x57mm

**Technical description**

Article number	1817.401-V
LED Consumption	5.3W
Current	-
CCT	3000K
Lumen <sup>*1</sup>	-
Øsystem <sup>*3</sup>	214lm
Voltage	24vdc
Reflector	90°
CRI	90+
Driver	-

**Technical character**

Insulation	CLASS I
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(10k) >50000 (h)

**Materials**

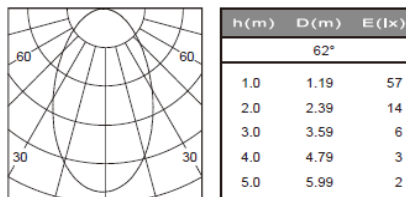
Luminaire	ADC12
Baffle	ABS
Reflector	-
Heat sink	ADC12
Color available	white / black

**Package**

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

**Accessories**

None

**Photometric****Remarks**

\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

