

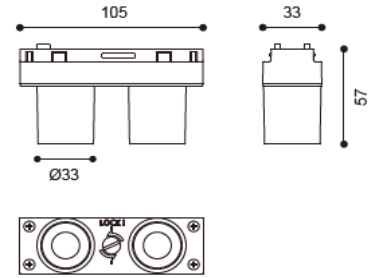
SLIMDUET-GL



Product specification

INTERIOR SYSTEM LIGHT

Installation	system light
Cut out	-
Dimension	D=Ø33 105x33x57mm

**Technical description**

Article number	1617.409A-V
LED Consumption	5.3W
Current	-
CCT	3000K
Lumen ^{*1}	399lm
Øsystem ^{*3}	-
Voltage	24vdc
Reflector	19°/35°
CRI	90+
Driver	-

Technical character

Insulation	CLASS I
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(10k) >50000 (h)

Materials

Luminaire	ADC12
Baffle	ABS
Reflector	-
Heat sink	ADC12
Color available	white / black
Color available-Baffle	white / black / Piano black

Package

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Photometric**Accessories**

None

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.