



**AGILE-WM**



**Product specification**

<b>INTERIOR RECESSED DOWN LIGHT</b>	
<b>Installation</b>	Ceiling recessed
<b>Cut out</b>	Ø123mm
<b>Dimension</b>	D=Ø135 x H= 164mm

**Technical description**

<b>Article number</b>	1018.101		
<b>LED Consumption</b>	25.5W		
<b>Current</b>	700mA		
<b>CCT</b>	2700K	3000K	4000K
<b>Lumen <sup>*1</sup></b>	2565lm	2670lm	2712lm
<b>Øsystem<sup>*3</sup></b>	-	-	-
<b>Voltage</b>	36.5V		
<b>Reflector</b>	20°/40°		
<b>CRI</b>	90+		
<b>Driver</b>	Remoted , I/P : 90-264V 50/60HZ O/P : 15-50V 700mA 35w Max		


<b>Technical character</b>	
<b>Insulation</b>	CLASS III
<b>Protection</b>	IP 20
<b>Tilt</b>	0~30°
<b>Rotate</b>	0~355°
<b>Operating temperature</b>	-20~40 °C
<b>Average Failure Time</b>	L70(10k) >60000 (h)

<b>Materials</b>	
<b>Luminaire</b>	aluminum die cast
<b>Reflector (inner)</b>	anodized aluminum
<b>Reflector (outer)</b>	plastic-PC
<b>Heat sink</b>	forged aluminum
<b>Reflector color available</b>	white / black

**Package**

<b>inner box</b>	-	mm 1 kg
<b>outer box</b>	-	mm 0 kg / 0 in 1

**Photometric**

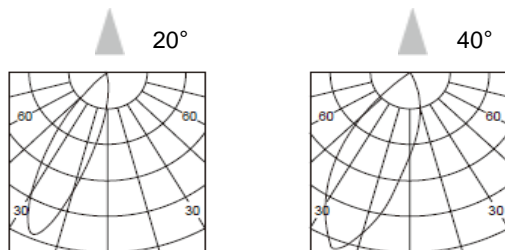

**Accessories**

None

**Remarks**



\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.