


**CHANNEL-P****Product specification**

INTERIOR RECESSED DOWN LIGHT	
Installation	Track light
Cut out	
Dimension	60X300mm 60X600mm 60X900mm



Technical description			
Article number	1617.400A	1617.400B	1617.400C
LED Consumption	15W	30W	45W
Current	-	-	-
CCT	3000K	3000K	3000K
Lumen ^{*1}	-	-	-
Øsystem ^{*3}	806 (lm)	1612 (lm)	2418 (lm)
Voltage	100-240V AC		
Reflector	115°		
CRI	80+		
Driver			

Technical character	
Insulation	CLASS I
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)


Materials	
Luminaire	steel
Reflector	-
Heat sink	steel
Color available	white / black

Package

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Accessories

None

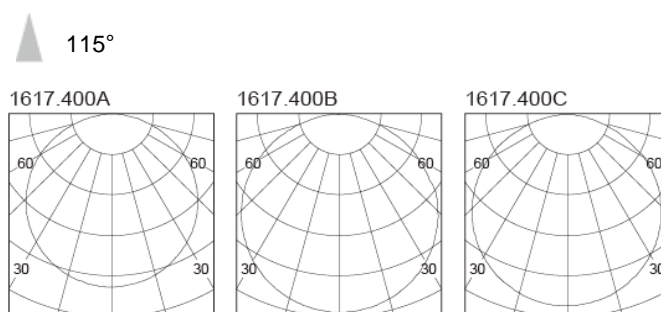Remarks**Photometric**

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.