
Hammessillis

LINEA-W



Product specification

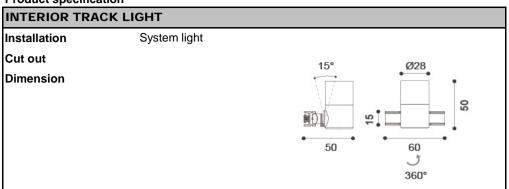

Technical description		
Article number	1719.215	
LED Consumption	2.2W	
Current		
ССТ	3000K	
Lumen *1		
Øsystem ^{*3}	210 (lm)	
Voltage	24V DC	
Reflector	16°/ 22°/ 36°/ 29°x57°	
CRI	80+	
Driver		

Technical character		
Insulation	CLASS III	
Protection	IP 20	
Tilt		
Rotate	0~360°	
Operating temperature	-20~40 °C	
Average Failure Time	L70(6k) >36000 (h)	

Materials		
Luminaire	aluminum body and plastic base	
Lummane	PMMA Lens	
Reflector		
Heat sink	aluminum	
Color available	Black / Anodized Alum.	

Package

inner box	mm 1 kg
outer box	mm $0 \text{ kg} / 0 \text{ in } 1$


Accessories


None


Remarks



Photometric







- *1. LUMEN : for LED chip test result based on Tc=85°C.
 - This is the ideal (Maximum) lumen. This lumen information is from the LED supplier
- *3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.