


## SLIMDUET-K



## Product specification

## INTERIOR SYSTEM LIGHT

<b>Installation</b>	Track light
<b>Cut out</b>	-
<b>Dimension</b>	61x33mm L:143/276/405mm

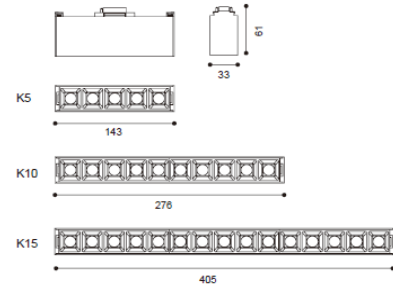

## Technical description

<b>Article number</b>	1817.406A-V	1817.406B-V	1817.406C-V
<b>LED Consumption</b>	11W	22W	33W
<b>Current</b>	-	-	-
<b>CCT</b>	3000K	3000K	3000K
<b>Lumen <sup>*1</sup></b>	200lm x5	200lm x10	200lm x15
<b>Øsystem <sup>*3</sup></b>	-	-	-
<b>Voltage</b>	24vdc		
<b>Reflector</b>	15°/30°/40°		
<b>CRI</b>	90+		
<b>Driver</b>	-		

## Technical character

<b>Insulation</b>	CLASS I
<b>Protection</b>	IP 20
<b>Tilt</b>	-
<b>Rotate</b>	-
<b>Operating temperature</b>	-20~40 °C
<b>Average Failure Time</b>	L70(6k) >36000 (h)

## Materials

<b>Luminaire</b>	aluminum extruded
<b>Reflector</b>	Lens
<b>Heat sink</b>	aluminum extruded
<b>Color available(body)</b>	white / black
<b>Color available(Baffle)</b>	white / black / Piano black

## Package

<b>inner box</b>	mm 1 kg
<b>outer box</b>	mm 0 kg / 0 in 1

## Photometric

## Accessories

None

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.