




SHUTTLE-L-S

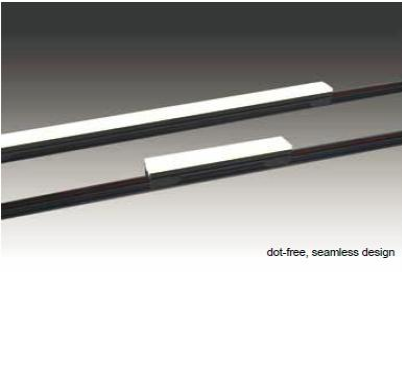

Product specification

INTERIOR LED LINEAR LIGHT

Installation	System light
Cut out	-
Dimension	D=15x15mm

1810.001A : 100mm
1810.001B : 300mm
1810.001C : 600mm

15mm
15mm

Sidefeed

1810.001D : 100mm

Technical description				
Article number	1810.001A	1810.001B	1810.001C	1810.001D
LED Consumption	1W	4W	8W	1W
Current	60mA			
CCT	3000K			
Lumen *1	-	-	-	-
Øsystem*3	110lm	330lm	660lm	110lm
Voltage	24V DC			
Reflector	130°			
CRI	80+			
Driver	Remoted, I/P : 90-264V 50/60HZ O/P : 24Vdc			

Technical character	
Insulation	CLASS III
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)

Materials	
Luminaire	aluminum extruded body and plastic end cap PC diffuser
Reflector	-
Heat sink	aluminum extruded
Color available	anodized aluminum / Black

Package	
inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Accessories	
None	

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.



