

KANO



Product specification

INTERIOR RECESSED DOWN LIGHT	
Installation	Ceiling recessed
Cut out	138x39mm
Dimension	152x47x H=61mm

Technical description

Article number	1914.411-5
LED Consumption	11W
Current	700mA
Lumen *1	-
Øsystem *3	462lm
Voltage	-
Lens	wallwash
CCT	3000K
CRI	90+
Driver	Remoted, I/P : 90-264V 50/60HZ O/P : 9-24V 700mA Max16w

Technical character

Insulation	CLASS I
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)


Materials

Luminaire	extruded aluminum
Trimless recessed frame	steel
Baffle	PC
Heat sink	extruded aluminum
Color available(Bezel)	black/white
Color available(Baffle)	black/white

Package

inner box	mm
outer box	mm

Photometric

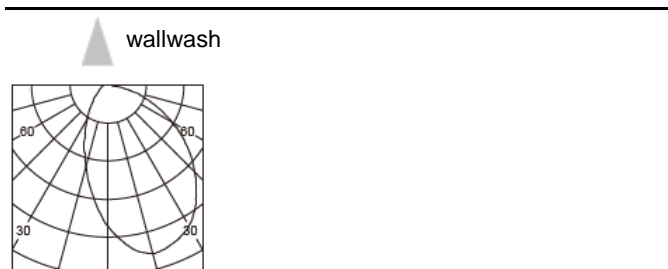

Accessories

None

Remarks



*1. LUMEN (Typical Pulsed Flux) : for LED chip test result based on $T_j=25^{\circ}\text{C}$, the ambient temperature at 25°C .

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,

this is the real lumen with the loss because of different design of reflectors and fixtures.