


CHANNEL-P



Product specification

INTERIOR RECESSED DOWN LIGHT

Installation	Track light
Cut out	
Dimension	54X300mm

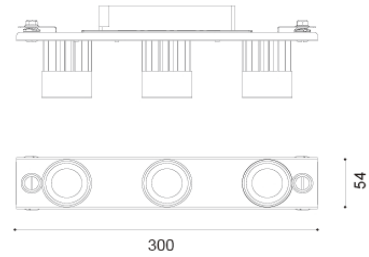

Technical description

Article number	1617.402	1617.402-V
LED Consumption	8.1WX3	8.1WX3
Current	-	-
CCT	3000K	3000K
Lumen *1	973 (lm)X3	973 (lm)X3
Øsystem^{*3}	-	-
Voltage	100-240V AC	100-240V AC
Reflector	15°/25°/38°/60°	15°/25°/38°/60°
CRI	90+	90+
Driver		

Technical character

Insulation	CLASS I
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)

Materials

Luminaire	steel
Reflector	plastic-PC
Heat sink	aluminum die cast
Color available	white / black

Package


inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Photometric

Accessories

None

Remarks

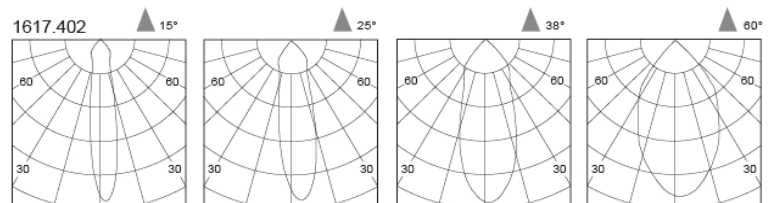

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.