

**Color available - A / C / D**

- Black
- White

- B**
- Black
  - White
  - Piano black
  - Chrome

## ENYO

Material: Aluminum forging heatsink with anodized black finish, plastic baffle with liquid coating or plating finish, aluminum die casting trim with powder coating finish.





Different sizes snoot to provide different function.

Upgraded version of our Gimble series, with 0~30 degree tilt and  
0~355 degree rotation, better lighting performance.  
Different accessories are added to meet the certain lighting effects.

---





<b>Article number</b>	<b>1618.161</b>
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/24°/38°/55°
CCT	3000K
CRI	90+



<b>Article number</b>	<b>1618.238</b>
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/24°/38°/55°
CCT	3000K
CRI	90+





**Dimmable**

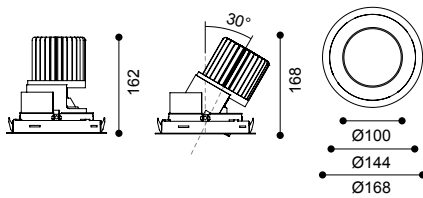

h (m)	D (m)	E (lx)
38°		
1.0	0.64	5209
2.0	1.29	1302
3.0	1.94	578
4.0	2.58	325
5.0	3.23	208



**Dimmable**

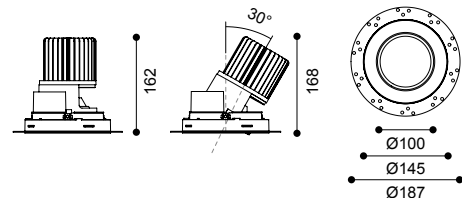

h (m)	D (m)	E (lx)
38°		
1.0	0.64	5209
2.0	1.29	1302
3.0	1.94	578
4.0	2.58	325
5.0	3.23	208

**Accessories**



SG10-2 Wave glass      H13-2 Honeycomb louver

**Accessories**




SG10-2 Wave glass      H13-2 Honeycomb louver





<b>Article number</b>	<b>1618.160</b>
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	12°/24°/35°
CCT	3000K
CRI	90+



<b>Article number</b>	<b>1618.237</b>
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	12°/24°/35°
CCT	3000K
CRI	90+



**Dimmable**

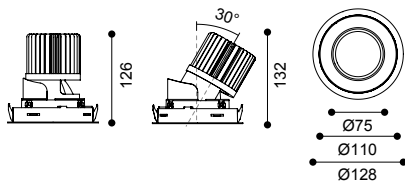


h (m)	35°	
	D (m)	E (lx)
1.0	0.67	3501
2.0	1.34	875
3.0	2.02	388
4.0	2.69	218
5.0	3.37	140



**Accessories**



SG10-1 Wove glass      H13-1 Honeycomb louver



**Dimmable**

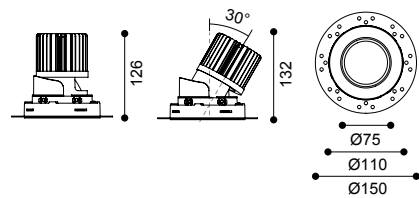

h (m)	35°	
	D (m)	E (lx)
1.0	0.67	3501
2.0	1.34	875
3.0	2.02	388
4.0	2.69	218
5.0	3.37	140

**Accessories**



SG10-1 Wove glass      H13-1 Honeycomb louver




<b>Article number</b>	<b>1618.163</b>
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/24°/35°/50°
CCT	3000K
CRI	90+



<b>Article number</b>	<b>1618.240</b>
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/24°/35°/50°
CCT	3000K
CRI	90+



**Dimmable**

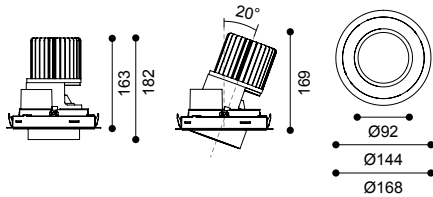


h (m)	35°	
	D (m)	E (lx)
1.0	0.62	6259
2.0	1.24	1565
3.0	1.86	695
4.0	2.48	391
5.0	3.10	250



**Accessories**



SG10-2 Wave glass      H13-2 Honeycomb louver



**Dimmable**

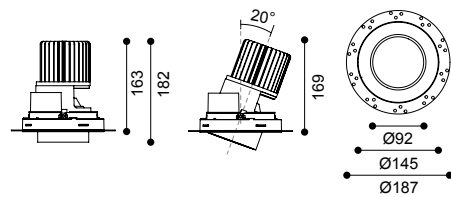

h (m)	35°	
	D (m)	E (lx)
1.0	0.62	6259
2.0	1.24	1565
3.0	1.86	695
4.0	2.48	391
5.0	3.10	250

**Accessories**



SG10-2 Wave glass      H13-2 Honeycomb louver





<b>Article number</b>	<b>1618.162</b>
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	12°/24°/35°
CCT	3000K
CRI	90+



<b>Article number</b>	<b>1618.239</b>
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	12°/24°/35°
CCT	3000K
CRI	90+



**Dimmable**

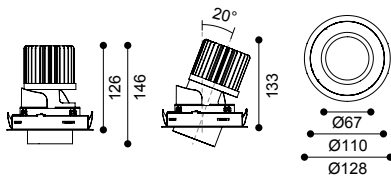


	h (m)	D (m)	E (lx)
	35°		
	1.0	0.57	3575
	2.0	1.15	893
	3.0	1.72	397
	4.0	2.30	223
	5.0	2.87	143



**Accessories**



SG10-1 Wave glass      H13-1 Honeycomb louvers



**Dimmable**

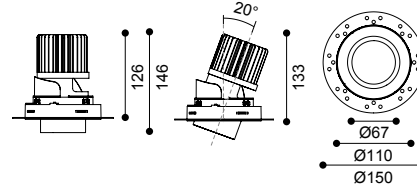

	h (m)	D (m)	E (lx)
	35°		
	1.0	0.57	3575
	2.0	1.15	893
	3.0	1.72	397
	4.0	2.30	223
	5.0	2.87	143

**Accessories**



SG10-1 Wave glass      H13-1 Honeycomb louvers





<b>Article number</b>	<b>1618.165</b>
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/24°/35°/55°
CCT	3000K
CRI	90+



<b>Article number</b>	<b>1618.242</b>
LED Consumption	39.1W
Current	1050 (mA)
Lumen	4058 (lm)
Beam Angle	15°/24°/35°/55°
CCT	3000K
CRI	90+



**Dimmable**

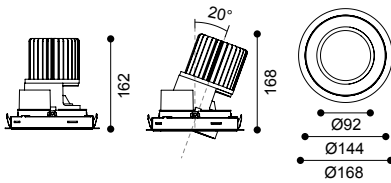

h (m)	D (m)	E (lx)
35°		
1.0	0.63	6241
2.0	1.26	1560
3.0	1.90	693
4.0	2.53	390
5.0	3.17	249



**Accessories**



SG10-2 Wave glass      H13-2 Honeycomb louver



**Dimmable**

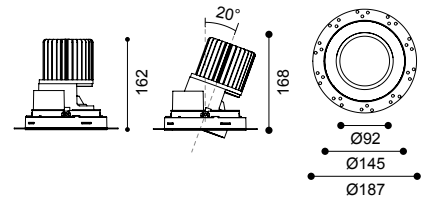

h (m)	D (m)	E (lx)
35°		
1.0	0.63	6241
2.0	1.26	1560
3.0	1.90	693
4.0	2.53	390
5.0	3.17	249

**Accessories**




SG10-2 Wave glass      H13-2 Honeycomb louver





<b>Article number</b>	<b>1618.164</b>
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	12°/24°/35°
CCT	3000K
CRI	90+



<b>Article number</b>	<b>1618.241</b>
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	12°/24°/35°
CCT	3000K
CRI	90+



**Dimmable**

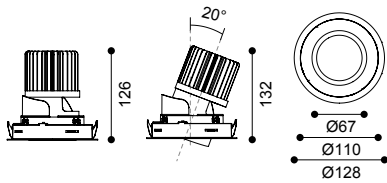


	35°		
	h (m)	D (m)	E (lx)
1.0	0.59	3584	
2.0	1.19	895	
3.0	1.79	398	
4.0	2.39	224	
5.0	2.99	143	



**Accessories**



SG10-1 Wave glass      H13-1 Honeycomb louvers



**Dimmable**

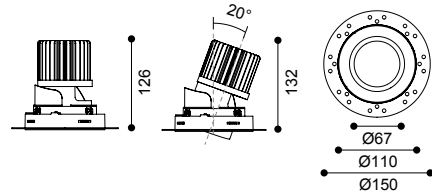

	35°		
	h (m)	D (m)	E (lx)
1.0	0.59	3584	
2.0	1.19	895	
3.0	1.79	398	
4.0	2.39	224	
5.0	2.99	143	

**Accessories**



SG10-1 Wave glass      H13-1 Honeycomb louvers