

BROWNIE ONE SERIES (EU)



BROWNIE ONE (EU)

BROWNIE ONE is a versatile, elegant and slim office luminaire. It is available in two widths and three different mounting options, recessed, surface-mounted, and suspended. Up to four different lengths are available to form a continuous row of lights, as well as a system or as individual luminaires.

The series is designed as a lighting solution for upscale offices and commercial interiors. They ensure uniform illumination and provide pleasing ceiling lighting, creating a friendly working environment.

Shape



Linear
40



Linear
60

Mountings



Recessed
Trim



Recessed
Trimless



Surface
Mounted



Pendant

Light distributions



Downlight



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

Types

Recessed		
Trim		
Trimless	40	60

A: 23.15"(588mm)	A: 23.15"(588mm)
B: 45.43"(1154mm)	B: 45.43"(1154mm)
C: 67.72"(1720mm)	C: 67.72"(1720mm)
D: 90"(2286mm)	D: 90"(2286mm)

A: 22.44"(570mm)	A: 22.44"(570mm)
B: 44.72" (1136mm)	B: 44.72" (1136mm)
C: 67"(1702mm)	C: 67"(1702mm)
D: 89.29"(2268mm)	D: 89.29"(2268mm)

	40		60	
Surface		3.43" (87mm)		3.43" (80mm)
Mounted				

	40		60	
		4.12" (107mm)		3.93" (100mm)

	40/60	
Pendant		
	A: 22.44"(570mm)	
	B: 44.72" (1136mm)	
	C: 67"(1702mm)	
	D: 89.29"(2268mm)	


Colours


Bezel : Black White



BROWNIE ONE **40/60** (EU)

Recessed
Trim/Trimless



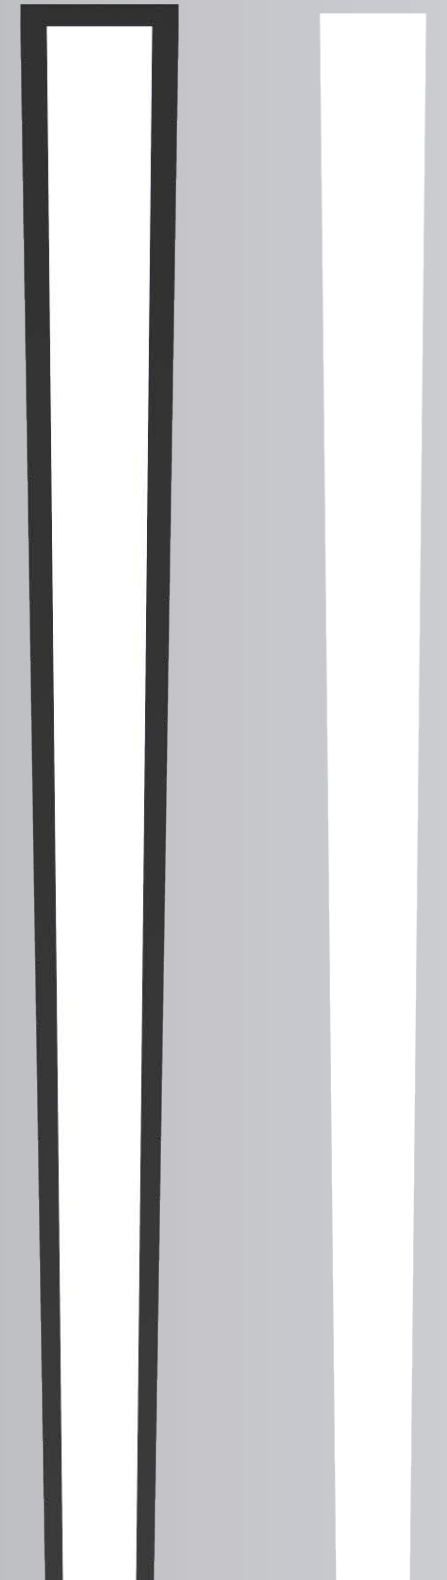


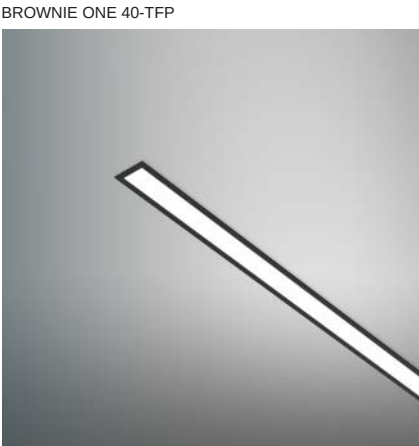

Article number	2114.416A 2114.416B 2114.416C 2114.416D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+
Bezel :	  Black White






Dimmable

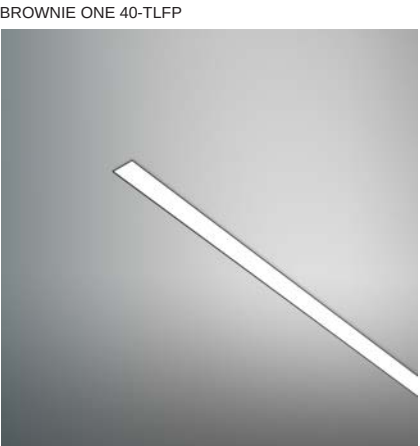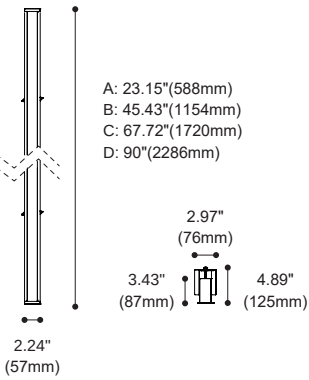

Article number	2114.516A 2114.516B 2114.516C 2114.516D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+






Dimmable

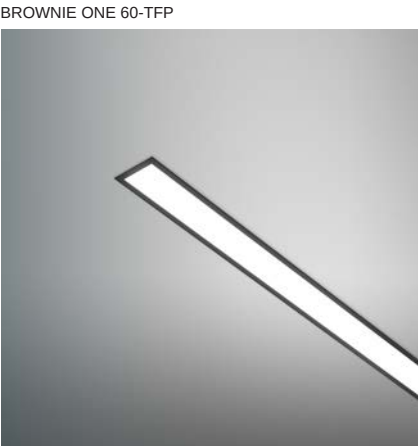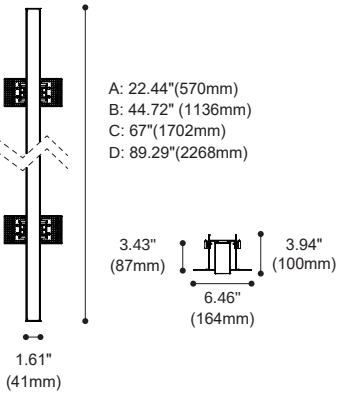

Article number	2114.417A 2114.417B 2114.417C 2114.417D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+
Bezel :	  Black White





Dimmable

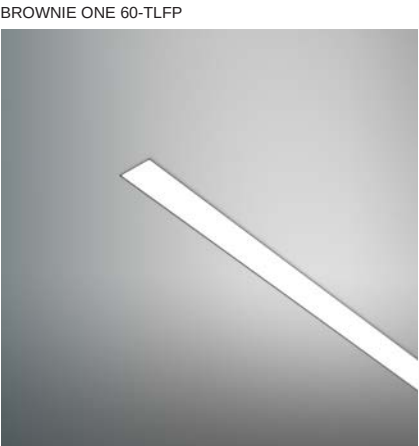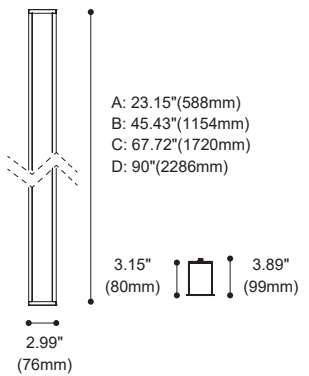

Article number	2114.517A 2114.517B 2114.517C 2114.517D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+




Dimmable

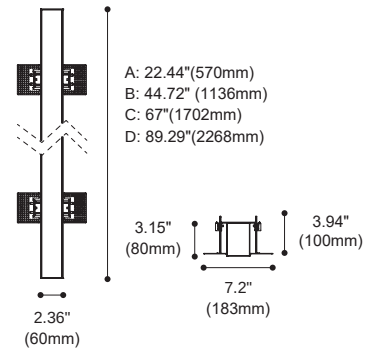



BROWNIE ONE **40/60** (EU)

Surface Mounted

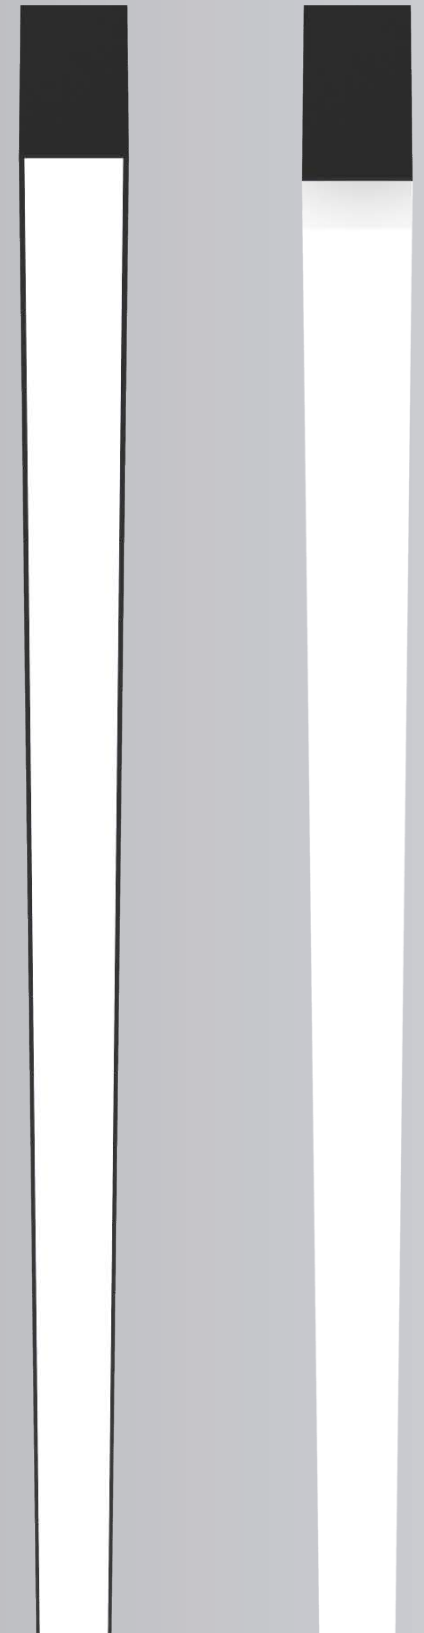


BROWNIE ONE 40-SF-1



Article number	2113.108A 2113.108B 2113.108C 2113.108D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+
Bezel :	  Black White



Dimmable

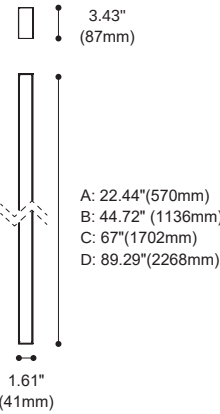


BROWNIE ONE 40-SF-2



Article number	2113.109A 2113.109B 2113.109C 2113.109D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+
Bezel :	  Black White



Dimmable

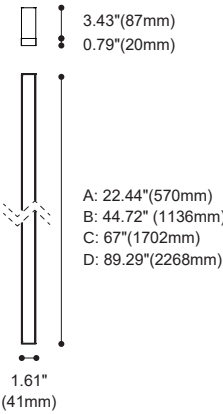


BROWNIE ONE 60-SF-1



Article number	2113.110A 2113.110B 2113.110C 2113.110D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+
Bezel :	  Black White



Dimmable

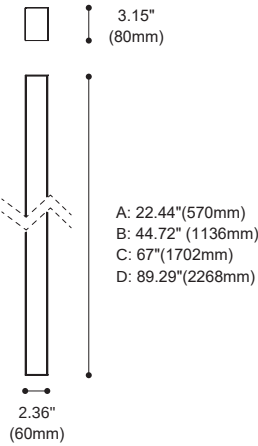


BROWNIE ONE 60-SF-2



Article number	2113.111A 2113.111B 2113.111C 2113.111D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+
Bezel :	  Black White




Dimmable

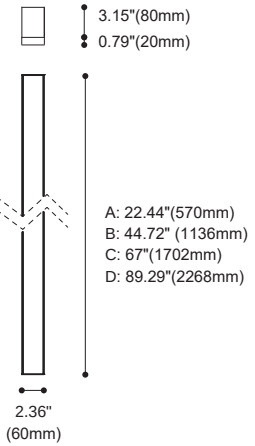



BROWNIE ONE **40/60** (EU)

Pendant

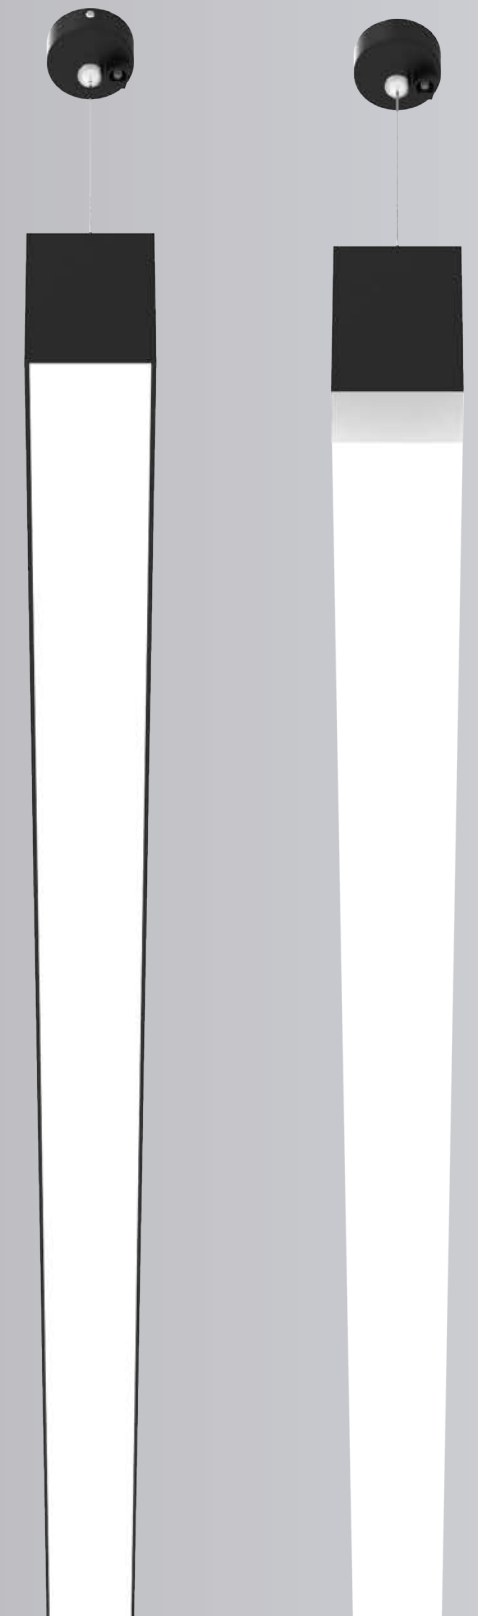

BROWNIE ONE 40-P-1




Article number	2116.110A 2116.110B 2116.110C 2116.110D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

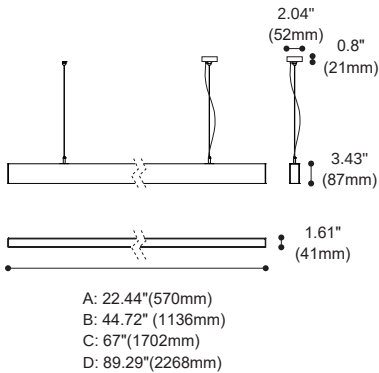

BROWNIE ONE 40-P-2




Article number	2116.111A 2116.111B 2116.111C 2116.111D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

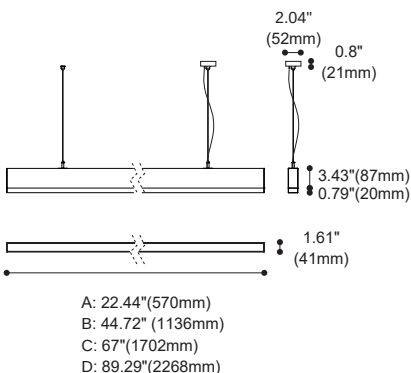

BROWNIE ONE 60-P-1




Article number	2116.112A 2116.112B 2116.112C 2116.112D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

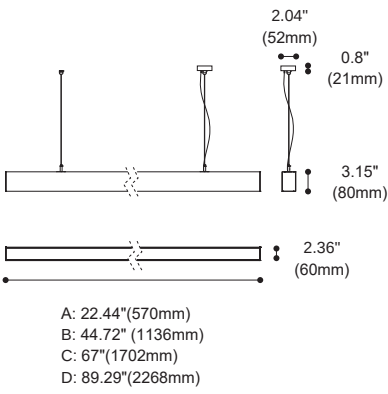

BROWNIE ONE 60-P-2



Article number	2116.113A 2116.113B 2116.113C 2116.113D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

