





CHAIN

CHAIN, an extension of our TRUNKING system
Modulized design for easy assembling L corner
is designed to make turns.
Spot & pendant modules are also available for
different applications.

CHAIN system



CHAIN

CHAIN PROFILE

	TEC	Aluminum profile	P.139
	TEC-14	Aluminum profile 90°	P.139



CHAIN MODULES

		Series name	LED Consumption	Lumen	P.140
		CHAIN-L	28W	2800 (lm)	
		CHAIN-P	28W 56W	2500 (lm) 5000 (lm)	P.141
		CHAIN-L-H	72W	7000 (lm)	P.142
		CHAIN-P-H	72W	6840 (lm)	P.143
		CHAIN-S	12.8W 25.5W	1387 (lm) 2670 (lm)	P.144
		CHAIN-C	6.4W 12.8W	542 (lm) 1387 (lm)	P.145

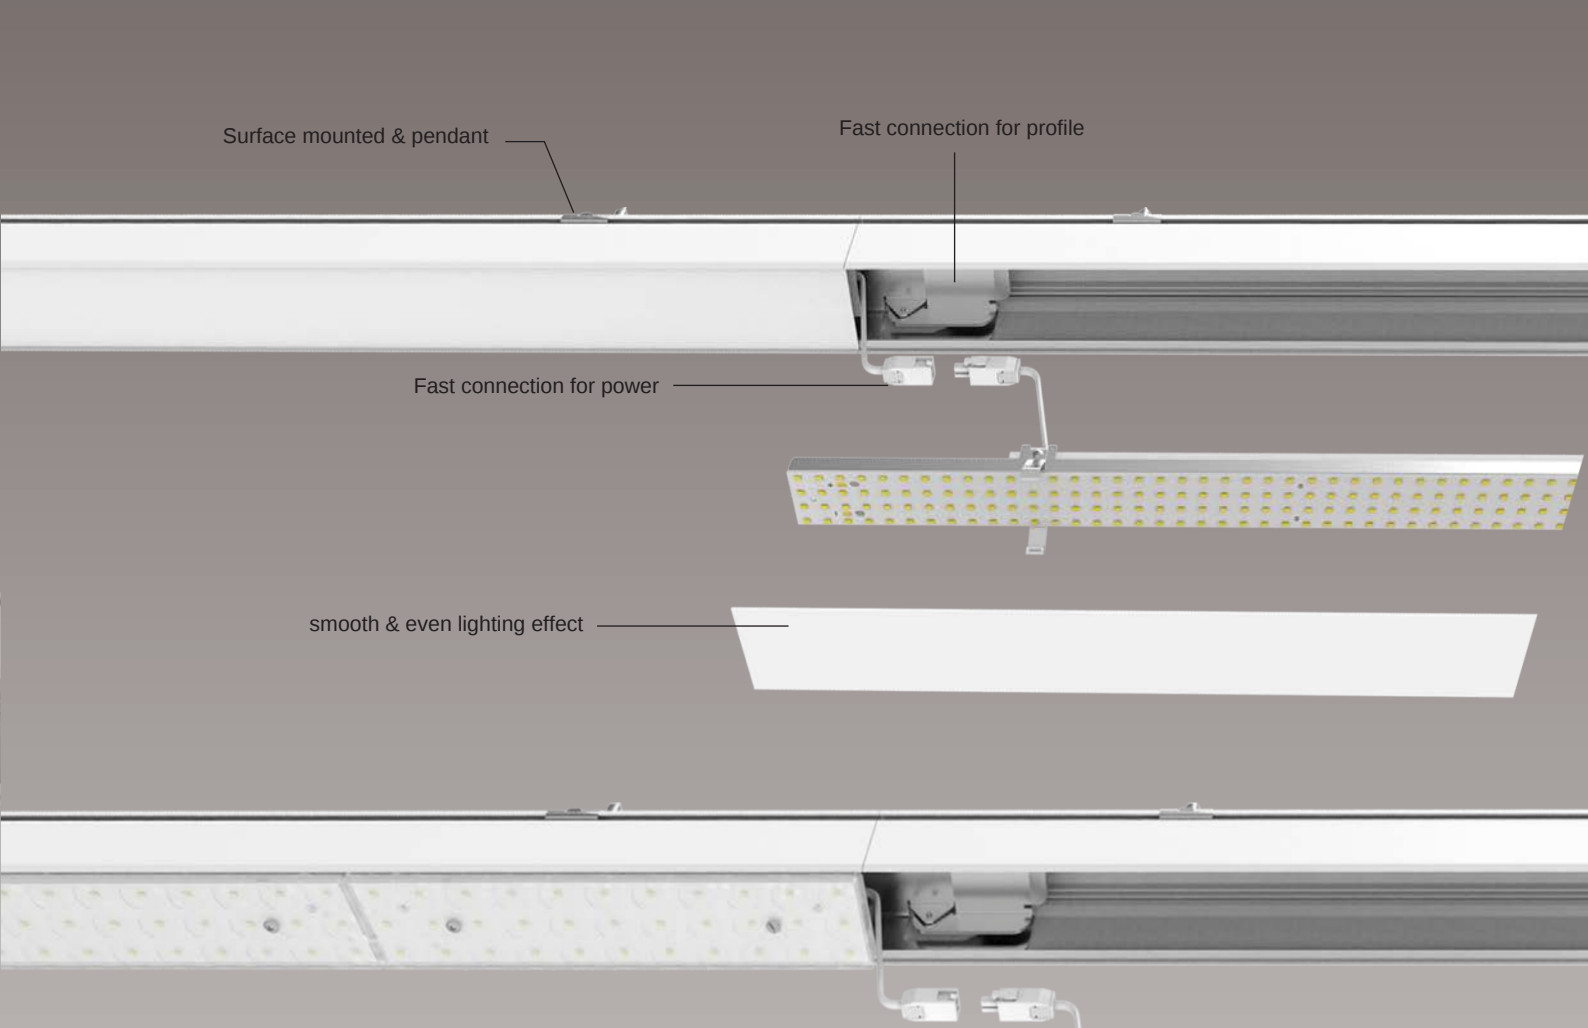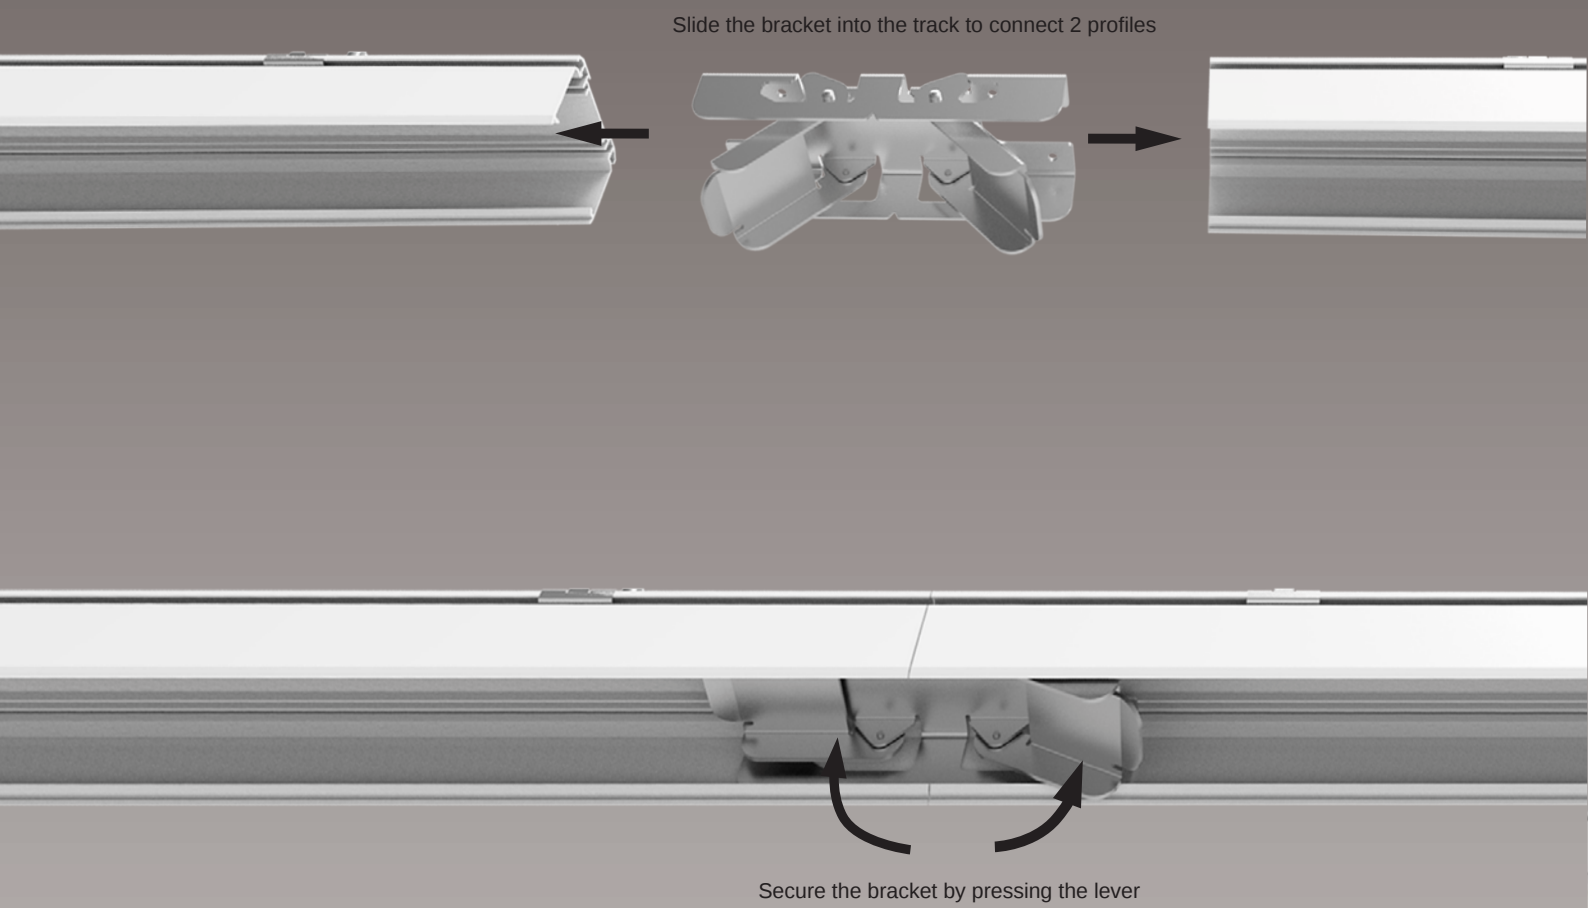


Max. current for the connector is 7A, Max. 1540W @ 230V AC

Model	Max. linkable
1717.102A / 1717.103A(28W)	58pcs @ 230V AC
1717.102B / 1717.103B(56W)	28pcs @ 230V AC
1717.105A / 1717.106A(72W)	21pcs @ 230V AC

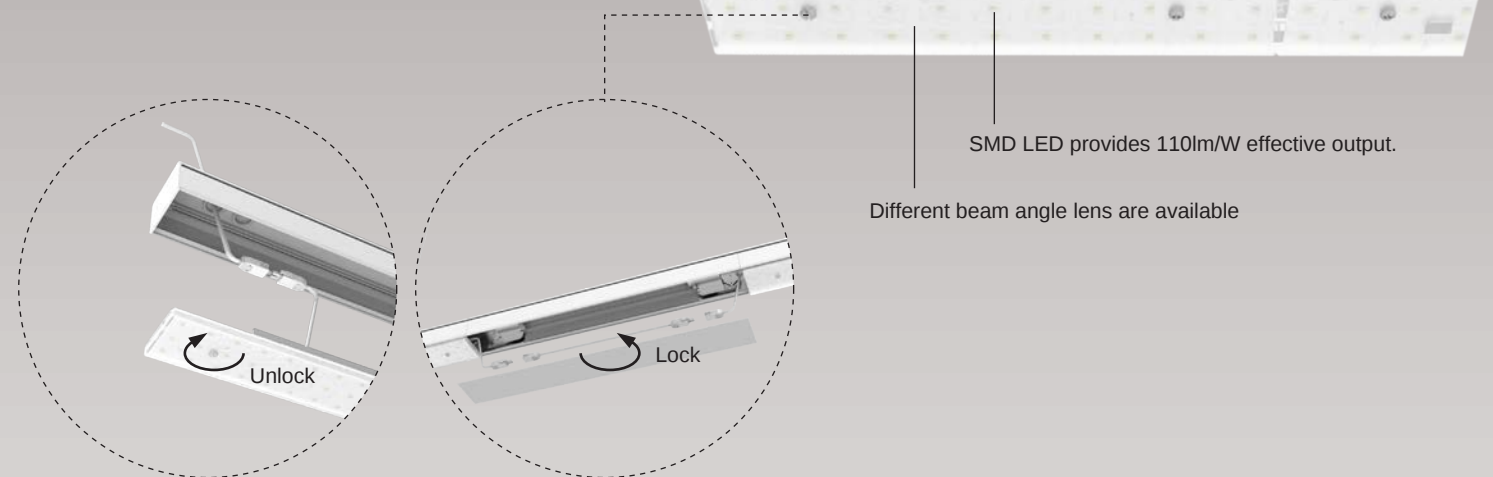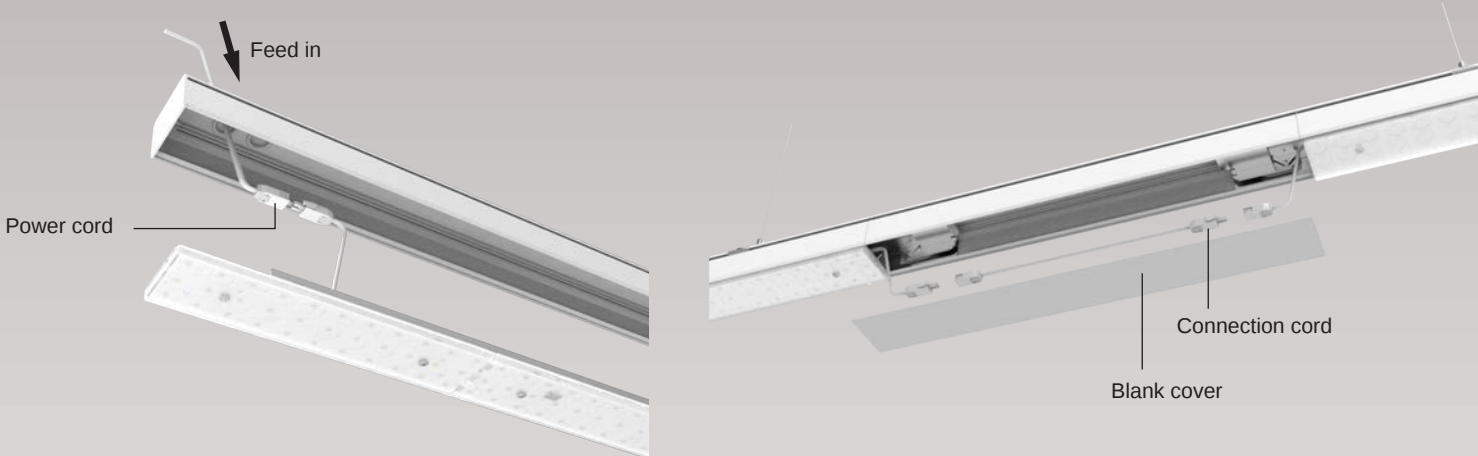


CHAIN


Surface mounted

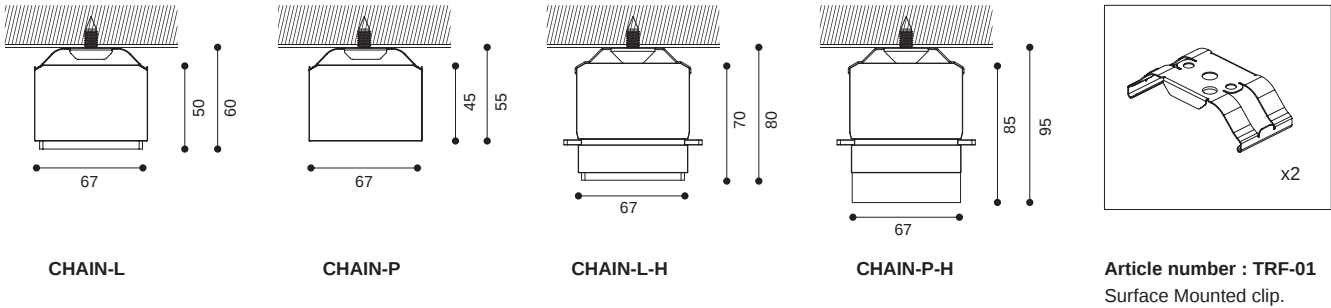

Pendant kit

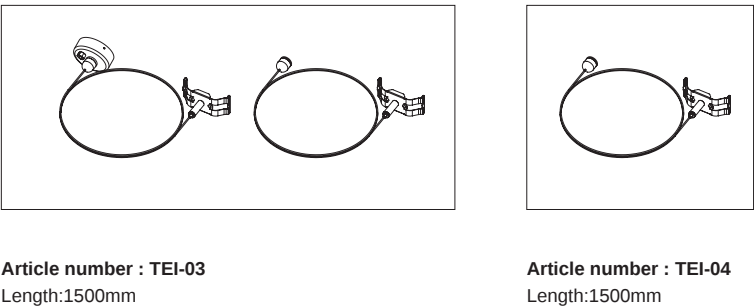


CHAIN modules & accessories

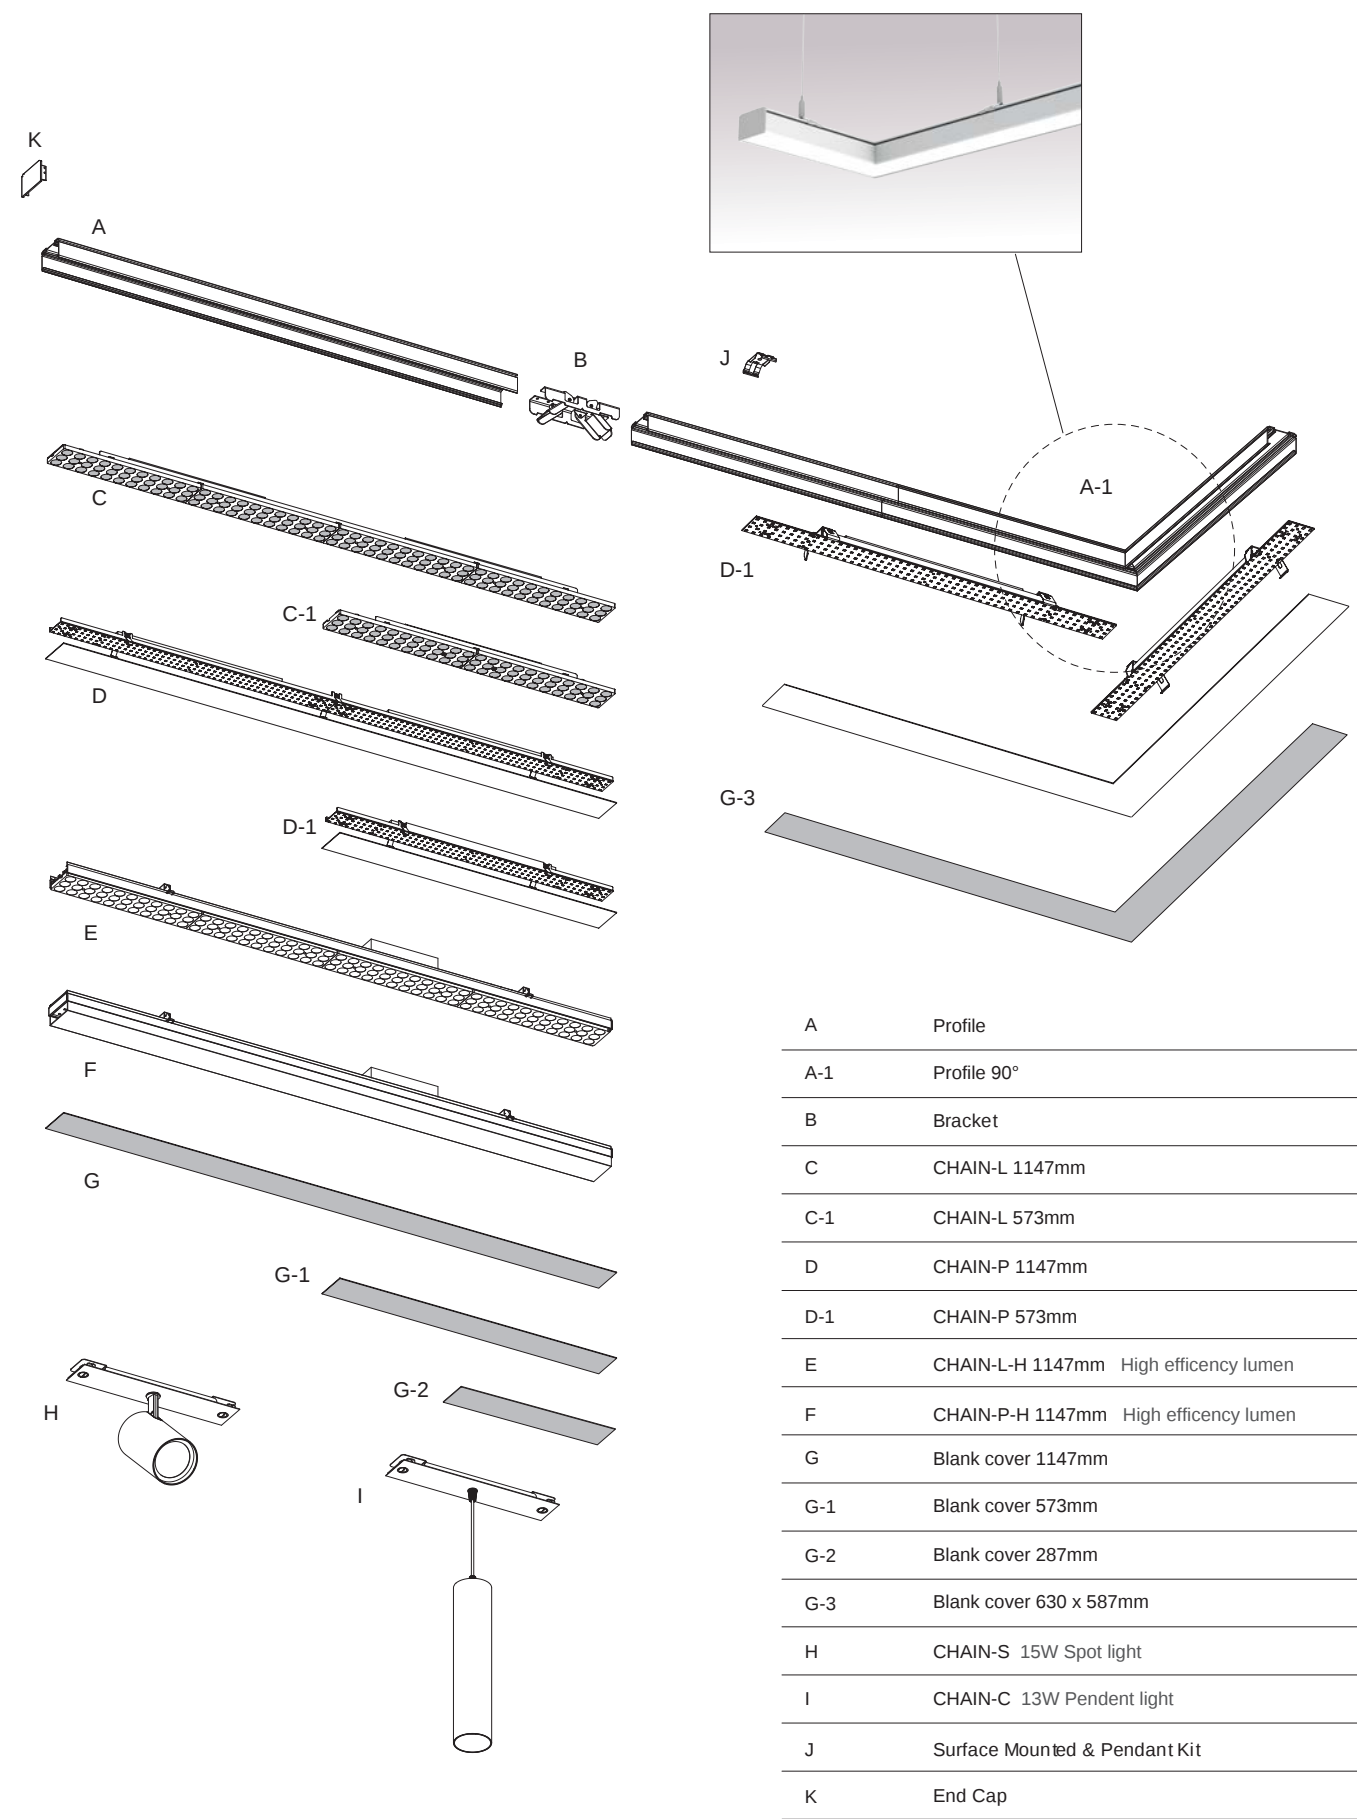


Components

Profile

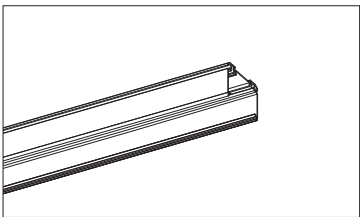


Article number	L
TEC-02	1148
TEC-06	2296

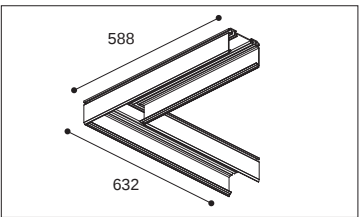


Article number	L
TEC-14	632 x 588

Bracket

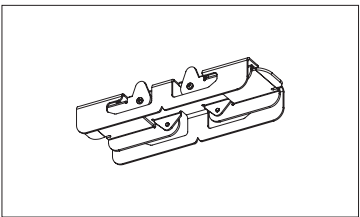


Article number
TEC-15

End cap

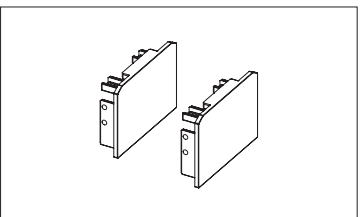


Article number
TEC-08

Blank cover

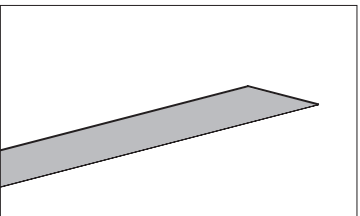


Article number	L
TEE-03	1147
TEE-04	573
TEE-05	287

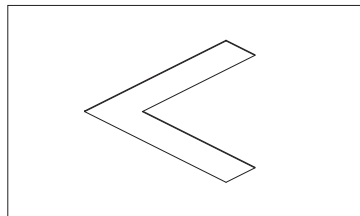


Article number	L
TEE-06	630 x 587(Milky Diffuser)
TEE-07	630 x 587(Blank cover)

Power Cord

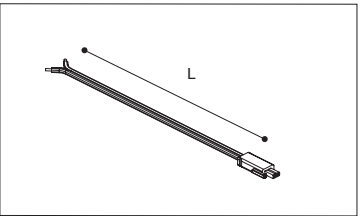


Article number	L
TEC-07	1900

Connection Cord

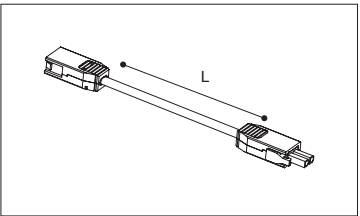

Article number	L
TEC-10	300
TEC-11	600
TEC-13	1200

CHAIN-L

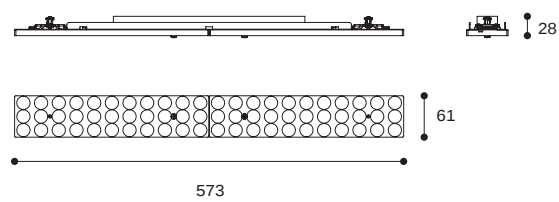


Product performance

Article number	LED Consumption	Voltage	System Lumen	Beam Angle	LED Type	LED q'ty	CCT/CRI
1717.102A	28 W	230V AC	2800 (lm)	30°/60°/90°/Double 20°	SMD	66	40/80+


Colours ☐ White



CHAIN-P

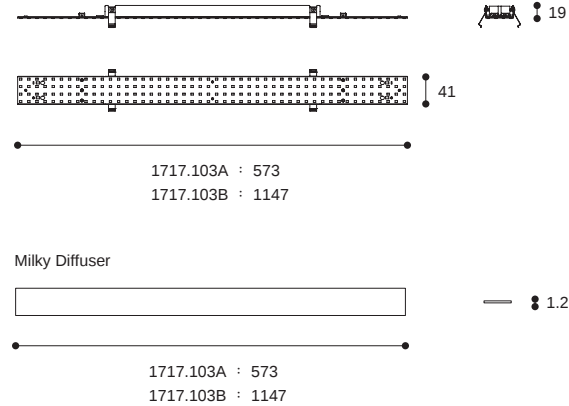


1717.103A



h(m)	D(m)	E(lx)
		112°
1.0	0.52	9909
2.0	1.05	2477
3.0	1.58	1101
4.0	2.11	619
5.0	2.64	396

1717.103B



h(m)	D(m)	E(lx)
		107°
1.0	0.52	9909
2.0	1.05	2477
3.0	1.58	1101
4.0	2.11	619
5.0	2.64	396



Product performance

Article number	LED Consumption	Voltage	System Lumen	Beam Angle	LED Type	LED q'ty	CCT/CRI
1717.103A	28 W	230V AC	2500 (lm)	120°	SMD	192	40/80+
1717.103B	56 W	230V AC	5000 (lm)	120°	SMD	384	40/80+

Colours ☐ White



CHAIN-L-H

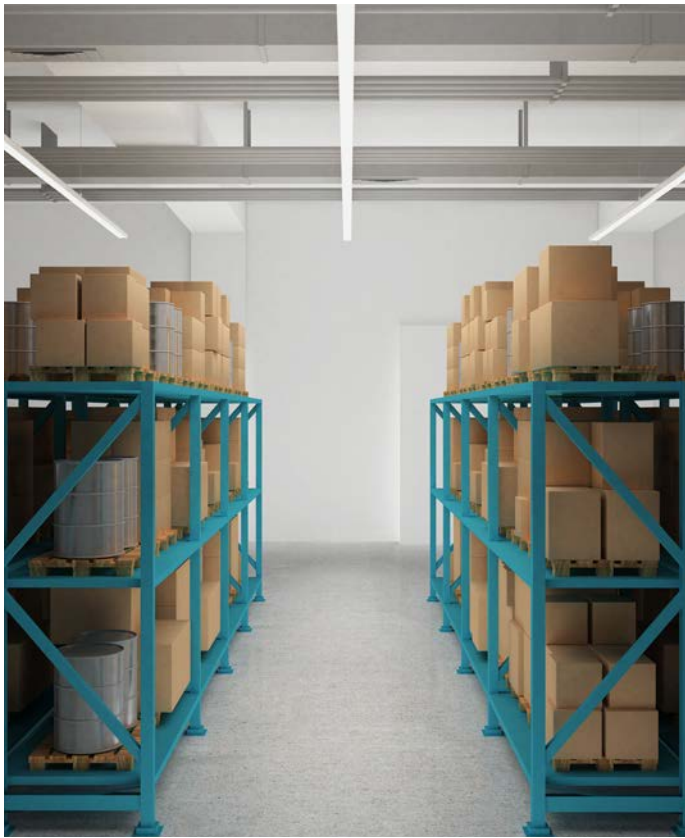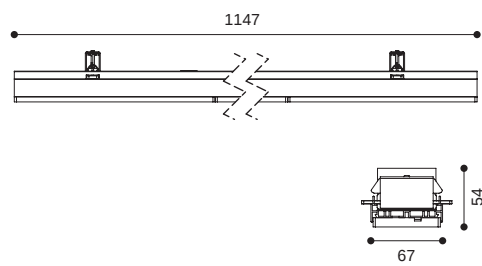


Product performance

Article number	LED Consumption	Voltage	System Lumen	Beam Angle	LED Type	LED q'ty	CCT/CRI
1717.105A	72 W	230V AC	7000 (lm)	30°/60°/90°/Double 20°	SMD	132	40/80+



CHAIN-P-H

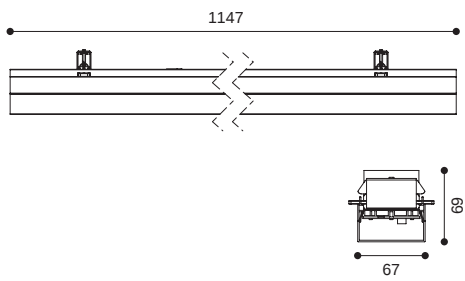



Product performance

Article number	LED Consumption	Voltage	System Lumen	Beam Angle	LED Type	LED q'ty	CCT/CRI
1717.106A	72 W	230V AC	6840 (lm)	120°	SMD	432	40/80+




CHAIN-S

12.8 W

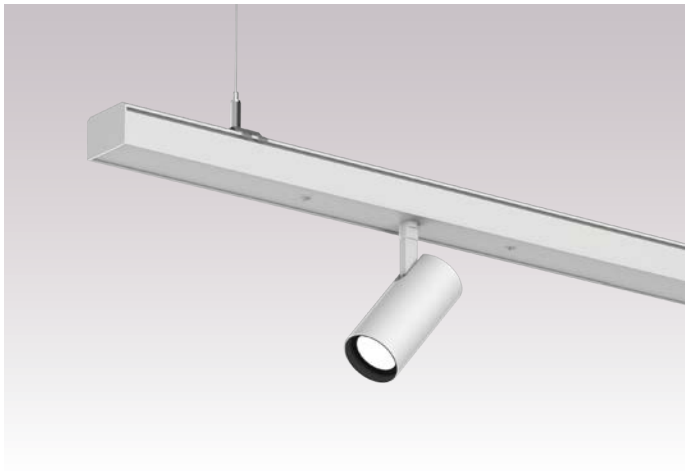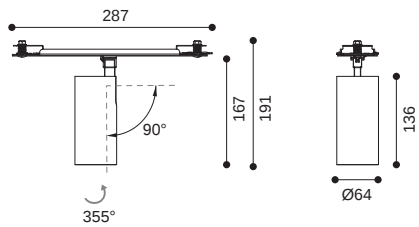

25.5 W

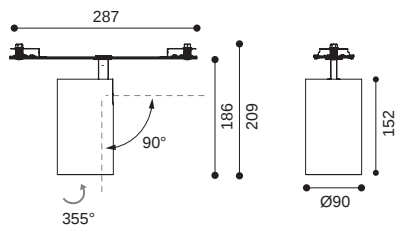

Product performance

Article number	LED Consumption	Voltage	Lumen	Beam Angle	CCT/CRI
1717.108	12.8W	230V AC	1387 (lm)	10°/20°/30°	30/90+
1717.109	25.5W	230V AC	2670 (lm)	10°/20°/30°	30/90+

- Colours


Black White
- Baffle :

Black White




CHAIN-C

6.4 W

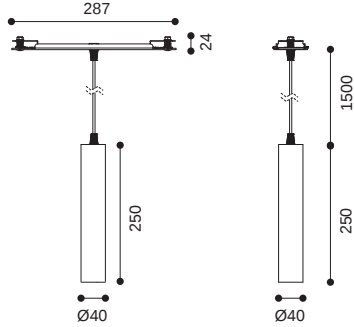

12.8 W

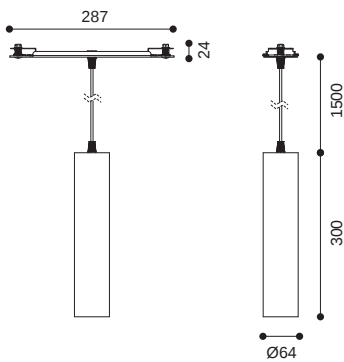

Product performance

Article number	LED Consumption	Voltage	Lumen	Beam Angle	CCT/CRI
1717.111	6.4W	230V AC	542 (lm)	10°/20°	30/90+
1717.110	12.8W	230V AC	1387 (lm)	10°/20°/30°	30/90+

- Colours

Black White
- Baffle :

Black White Copper

