




DOTA


Unique square shape, outstanding lighting quality with various beam angle to apply different diffusers for different environment. With wide variety of lighting type, track light, recessed down light, surface mounted light and wall light.

Lighting Technology

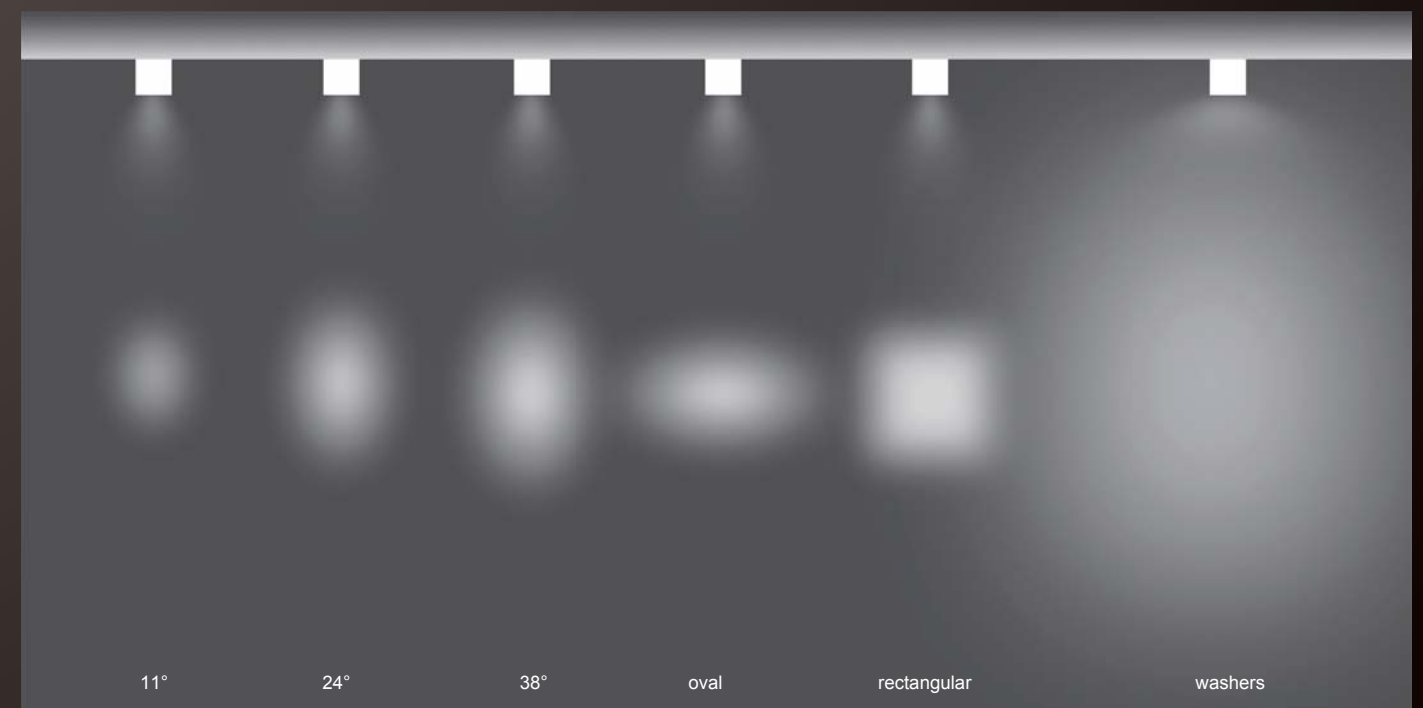

DOTA series


Sharing the same heatsink & optical mechanism.

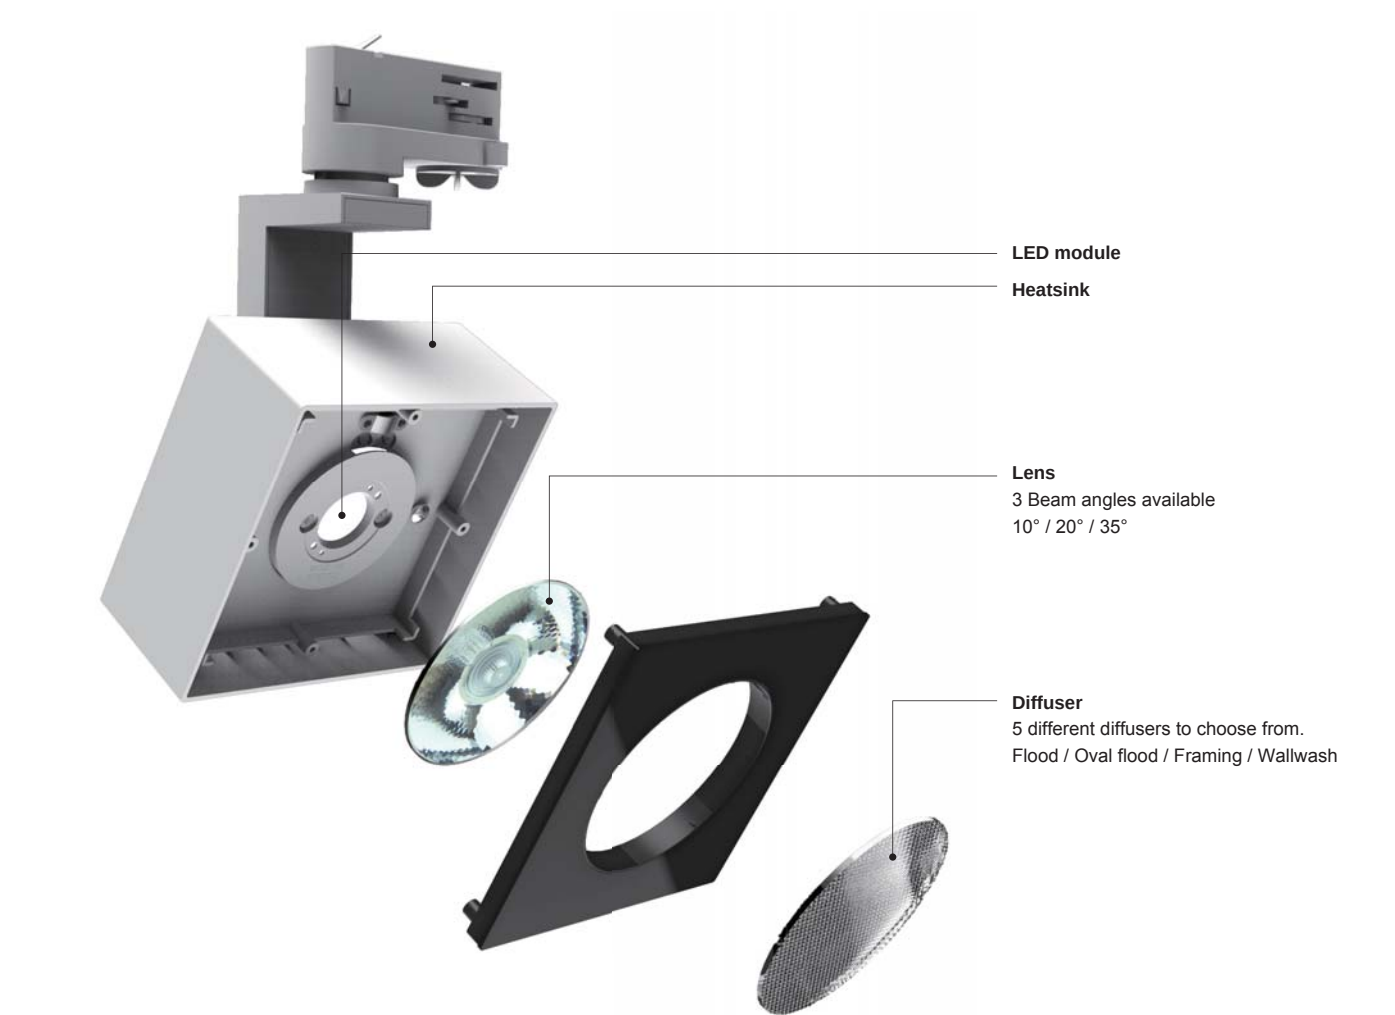

Multiple combination between the lens & diffuser


Lens

Spot (Angle 10° / 20° / 35°)
Round narrow beam is suitable for object lighting.

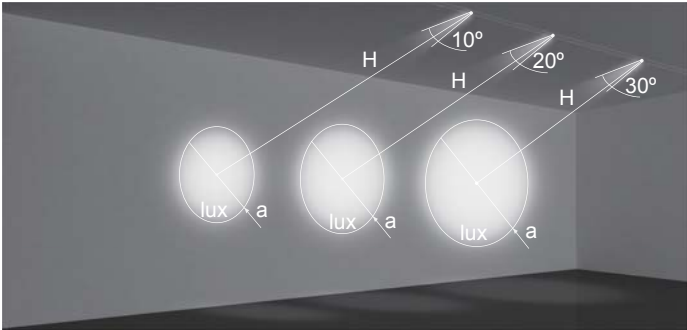


	H	a	lux
10°	1m	Ø22cm	26174 lx
	2m	Ø44cm	6544 lx
	2.5m	Ø55cm	4188 lx
20°	1m	Ø36cm	10857 lx
	2m	Ø72cm	2714 lx
	2.5m	Ø90cm	1737 lx
35°	1m	Ø63cm	3986 lx
	2m	Ø126cm	997 lx
	2.5m	Ø158cm	638 lx


Diffuser

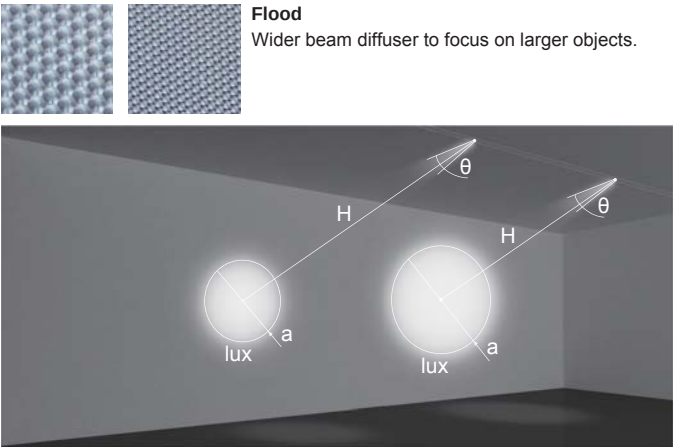


		DPSG10-02			DPCG10-02		
	H	a	lux	θ	a	lux	θ
10°	1m	Ø47cm	5795 lx	26°	Ø58cm	3943 lx	32°
	2m	Ø94cm	1449 lx		Ø116cm	986 lx	
	2.5m	Ø118cm	927 lx		Ø145cm	631 lx	
20°	1m	Ø59cm	2404 lx	33°	Ø72cm	1636 lx	40°
	2m	Ø118cm	601 lx		Ø144cm	409 lx	
	2.5m	Ø148cm	385 lx		Ø180cm	262 lx	
35°	1m	Ø88cm	883 lx	49°	Ø99cm	601 lx	55°
	2m	Ø176cm	221 lx		Ø198cm	150 lx	
	2.5m	Ø220cm	141 lx		Ø248cm	96 lx	

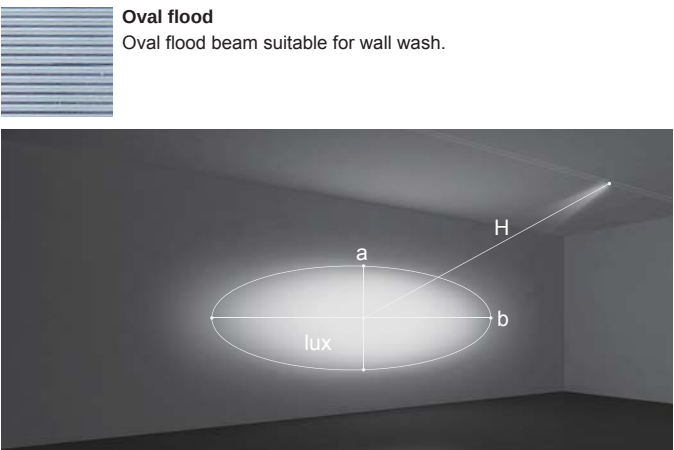

DPS10-02	H	a/b	lux
10°	1m	23cm / 47cm	10917 lx
	2m	46cm / 94cm	2729 lx
	2.5m	58cm / 118cm	1747 lx
20°	1m	38cm / 61cm	4528 lx
	2m	76cm / 122cm	1132 lx
	2.5m	95cm / 153cm	724 lx
35°	1m	65cm / 88cm	1663 lx
	2m	130cm / 176cm	416 lx
	2.5m	163cm / 220cm	266 lx

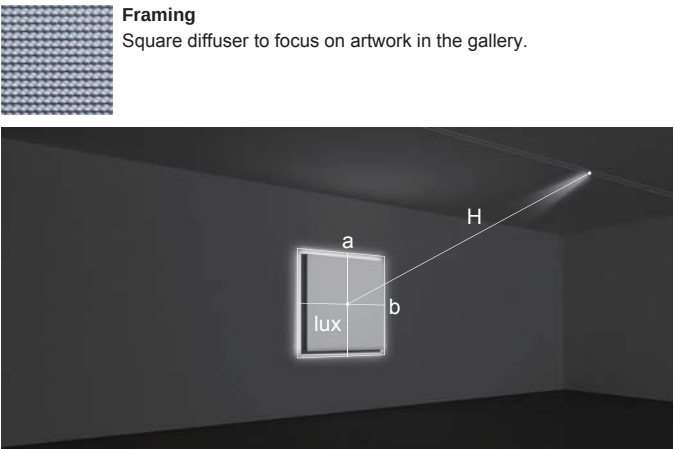

DP10-02	H	a/b	lux
10°	1m	67cm / 67cm	3673 lx
	2m	134cm / 134cm	918 lx
	2.5m	168cm / 168cm	588 lx
20°	1m	81cm / 81cm	1524 lx
	2m	162cm / 162cm	381 lx
	2.5m	203cm / 203cm	244 lx
35°	1m	108cm / 108cm	559 lx
	2m	216cm / 216cm	140 lx
	2.5m	270cm / 270cm	89 lx

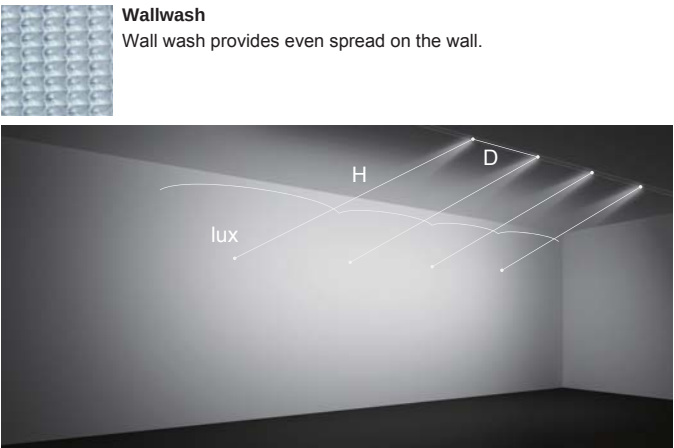

DPW10-02	H	D	lux
10°	1m	40cm	2502 lx
	2m	79cm	626 lx
	2.5m	99cm	400 lx
20°	1m	47cm	1038 lx
	2m	94cm	260 lx
	2.5m	118cm	166 lx
35°	1m	61cm	381 lx
	2m	121cm	95 lx
	2.5m	152cm	61 lx






Article number	1619.202
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/20°/35°
CCT	3000K
CRI	90+


Colours  
Black White



Dimmable

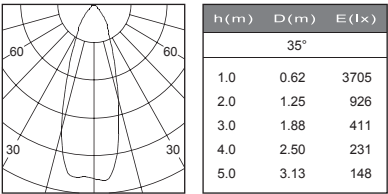

Accessories



DPSG10-02 flood diffuser DPCG10-02 flood diffuser



DPS10-02 oval flood diffuser DP10-02 framing diffuser DPW10-02 wallwash diffuser





Article number	1519.232
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/20°/35°
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



Accessories



DPSG10-02 flood diffuser DPCG10-02 flood diffuser



DPS10-02 oval flood diffuser DP10-02 framing diffuser DPW10-02 wallwash diffuser




Article number	1619.204
LED Consumption	30W
Voltage	230 (V AC)
Lumen	2295 (lm)
Beam Angle	10°/20°/35°
CCT	3000K
CRI	80+


Colours  
Black White



Dimmable



Accessories



DPSG10-02 flood diffuser DPCG10-02 flood diffuser





DPS10-02 oval flood diffuser DP10-02 framing diffuser DPW10-02 wallwash diffuser




Article number	1619.301
LED Consumption	25.5W
Current	700 (mA)
Lumen	2670 (lm)
Beam Angle	10°/20°/35°
CCT	3000K
CRI	90+

Colours  
Black White



Accessories



DPSG10-02 flood diffuser DPCG10-02 flood diffuser



DPS10-02 oval flood diffuser DP10-02 framing diffuser DPW10-02 wallwash diffuser