






NET

NET - is a structural system designed to have overall appearance in flow line style to integrate into the architecture. The system concept is user-friendly to adjust the angle easily in all kinds of different directions and simple installation to mount direct and indirect light.


COB LED and halogen bulb spotlight can be use on NET. The additional installation option by magnet can directly stick on the steel profile without additional mounting rails to save your time.

The application: shopping mall or restaurants.


Lighting analog




Single Channel Recessed Slot




Dual Channel Recessed Slot




Recessed Wall Wash / Grazer



Linear Cove Lighting









Floating Ceiling Perimeter Lighting

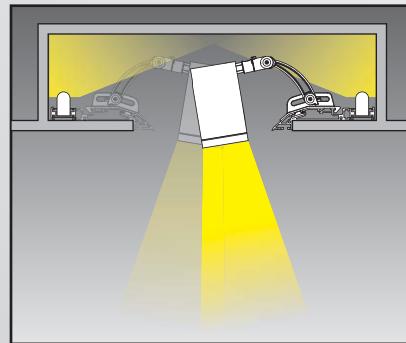

Floating Ceiling Perimeter Lighting


Diversification

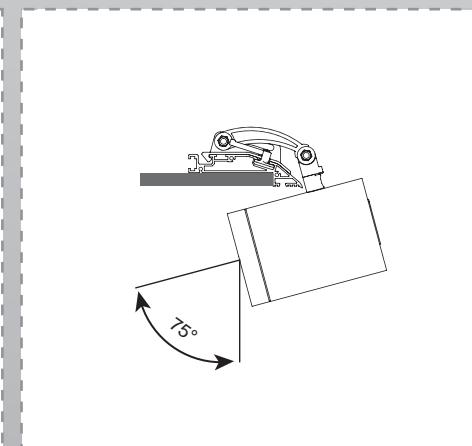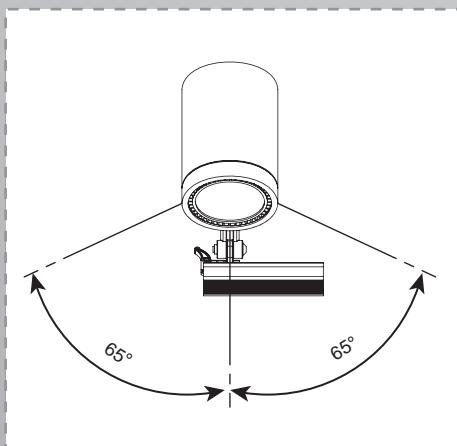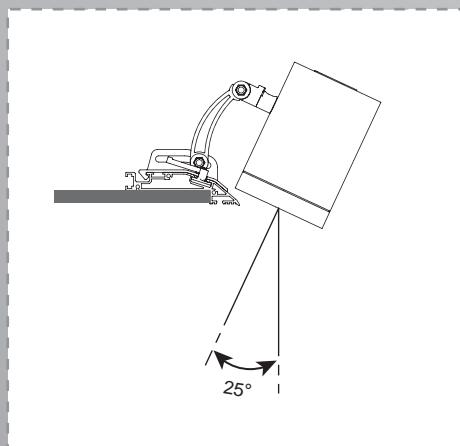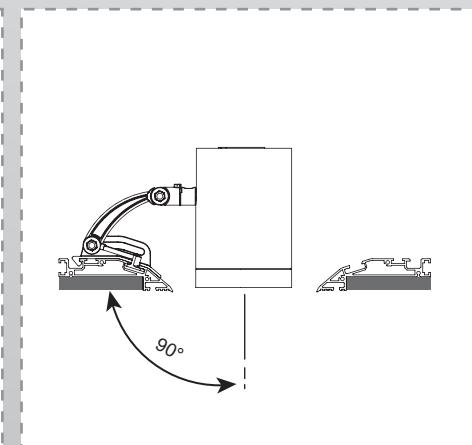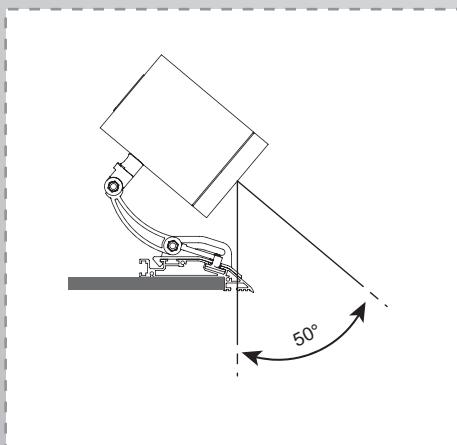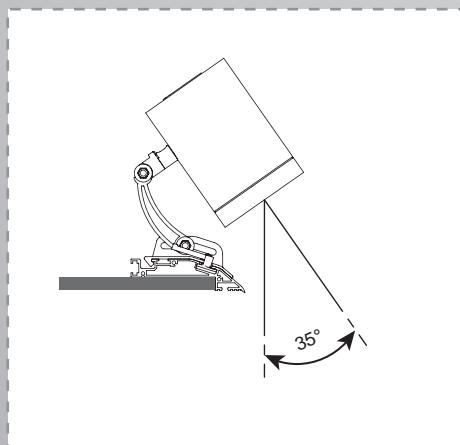

U-shaped track is also available for dual channel recessed slot.




Four ways to rotate and adjust

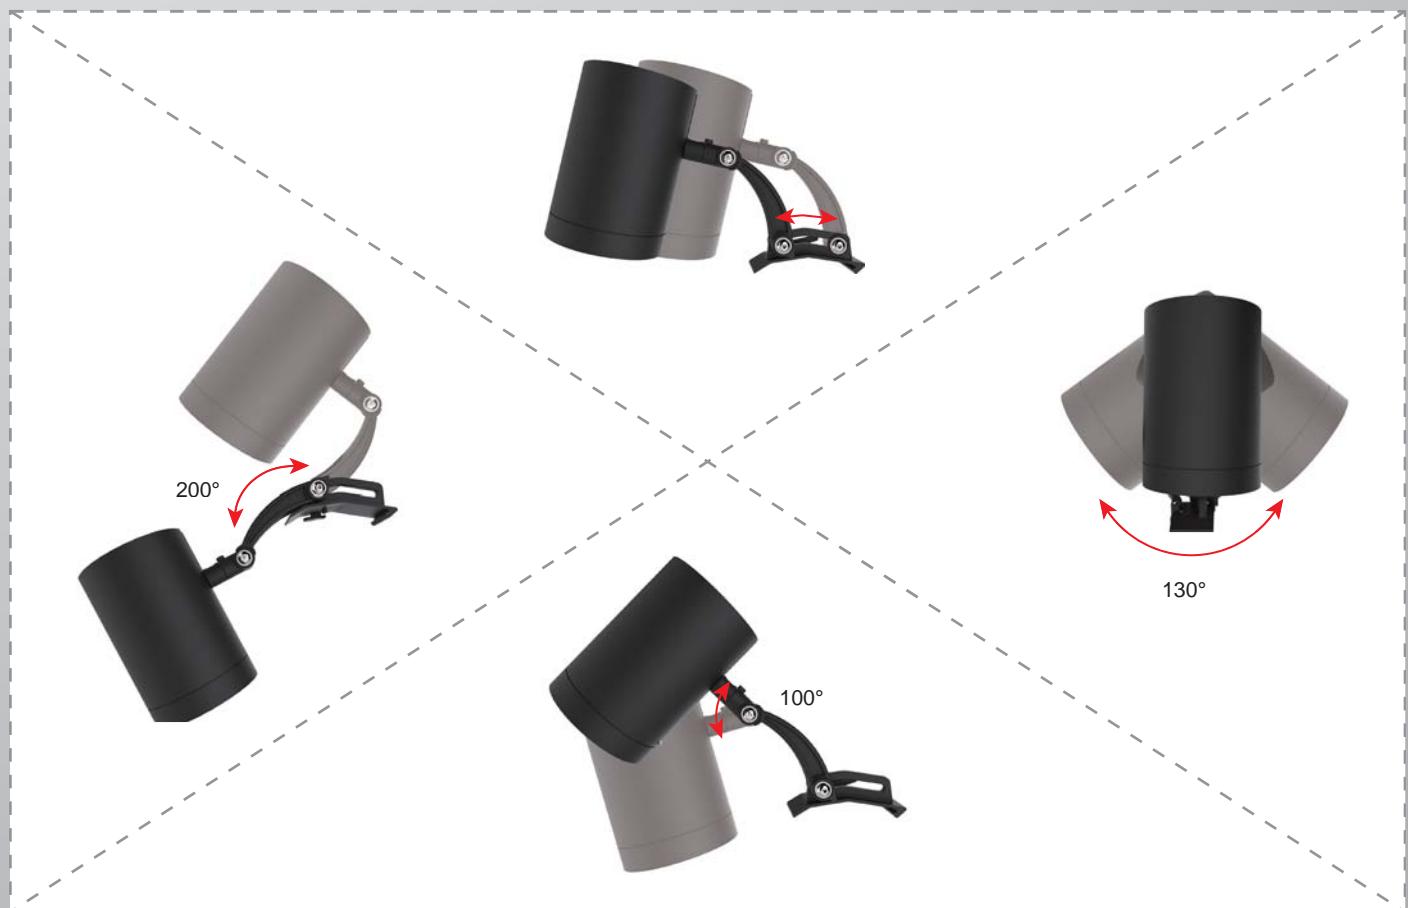



| Article number | 1419.215 |
|-----------------|-------------|
| LED Consumption | 25.9W |
| Current | 700 (mA) |
| Lumen | 2559 (lm) |
| Beam Angle | 12°/24°/40° |
| CCT | 3000K |
| CRI | 90+ |

Colours Black




| Article number | 1419.227.0BQR |
|-----------------|---------------|
| LED Consumption | 13W |
| Current | 350 (mA) |
| Lumen | 1329 (lm) |
| Beam Angle | 20°/40° |
| CCT | 3000K |
| CRI | 90+ |

| Article number | 1419.227.5ZZB |
|-----------------|----------------|
| Lamp | LED GU10 |
| Lampholder | GU10 |
| LED Consumption | max.7W |
| Voltage | 200-230 (V AC) |

| Article number | 1419.227.5ZZA |
|-----------------|---------------|
| Lamp | LED MR16 |
| Lampholder | GU5.3 |
| LED Consumption | 6.5W |
| Voltage | 12 (V AC) |

Colours Black




Article number

Description




RW-920

200cm track section



RW-U14


U track section(NET-80)



RW-U10

U track section(NET-64)

Assembling diagram :

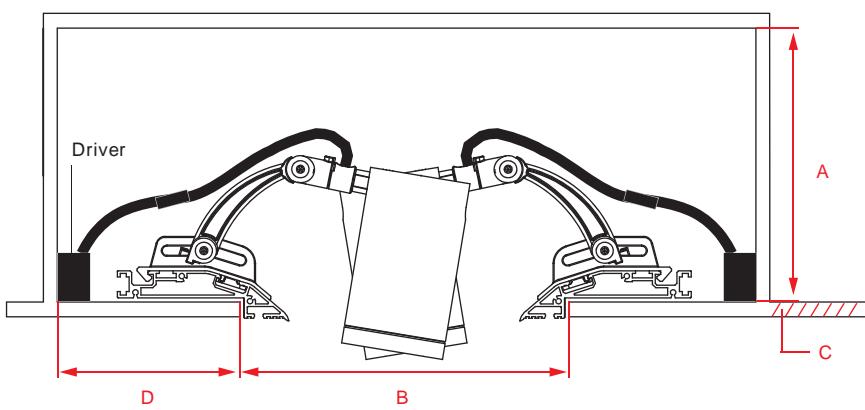


| SERIES | A | B | C | D | (mm) |
|--------|-------------|-------------|----|-------------|------|
| NET-80 | Minimum.300 | Minimum.190 | 12 | Minimum.220 | |
| NET-64 | Minimum.300 | Minimum.150 | 12 | Minimum.220 | |




MAGNET

Easy installation by using magnets to save time.
Can be mounted on steel plate by magnet, no additional mounting rails is needed.

Assembling diagram :

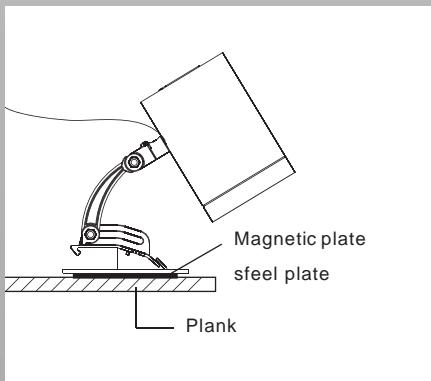

Fixtures can be mounted on steel plate by magnet.

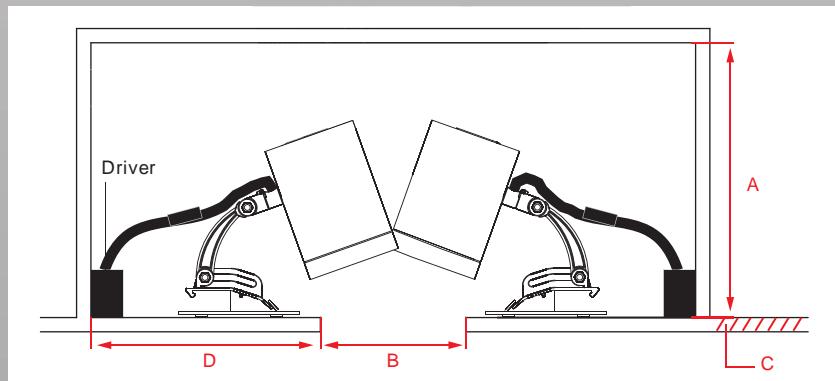

| SERIES | A | B | C | D | (mm) |
|-----------|-------------|-------------|-------|-------------|------|
| NET-80-II | Minimum.300 | Minimum.140 | 10-20 | Minimum.170 | |
| NET-64-II | Minimum.300 | Minimum.100 | 10-20 | Minimum.170 | |





| Article number | 1519.206 |
|-----------------|-------------|
| LED Consumption | 25.9W |
| Current | 700 (mA) |
| Lumen | 2559 (lm) |
| Beam Angle | 12°/24°/40° |
| CCT | 3000K |
| CRI | 90+ |

Colours



Black



| Article number | 1519.266.0BQR |
|-----------------|---------------|
| LED Consumption | 13W |
| Current | 350 (mA) |
| Lumen | 1329 (lm) |
| Beam Angle | 20°/40° |
| CCT | 3000K |
| CRI | 90+ |

| Article number | 1519.266.5ZZB |
|-----------------|----------------|
| Lamp | LED GU10 |
| Lampholder | GU10 |
| LED Consumption | max.7W |
| Voltage | 200-230 (V AC) |

| Article number | 1519.266.5ZZA |
|-----------------|---------------|
| Lamp | LED MR16 |
| Lampholder | GU5.3 |
| LED Consumption | 6.5W |
| Voltage | 12 (V AC) |

Colours



Black

