


Luminaire Photograph

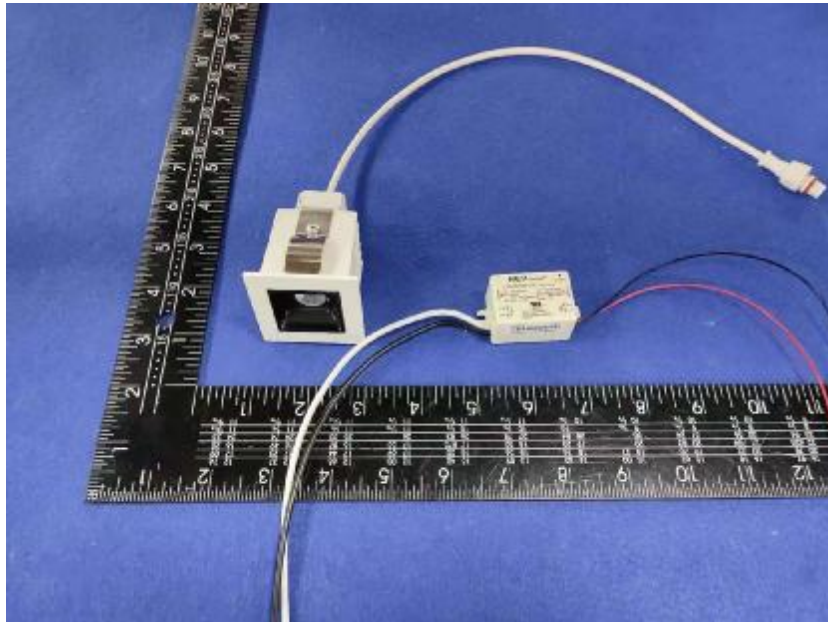

Light Output Ratio:	77.7%	
Luminaire Power:	3.669 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.70	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2021-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: GWCSSRM2.CM-M3M5-XX37-1 Ra: 90
REFLECTOR: PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

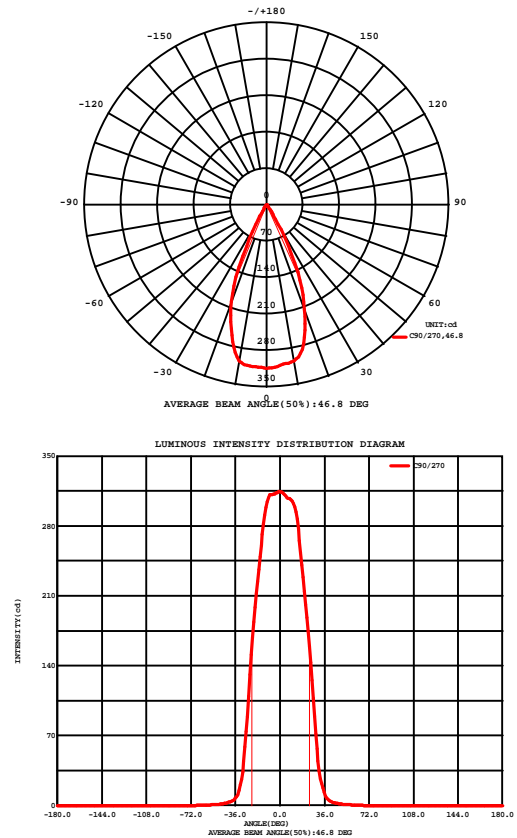
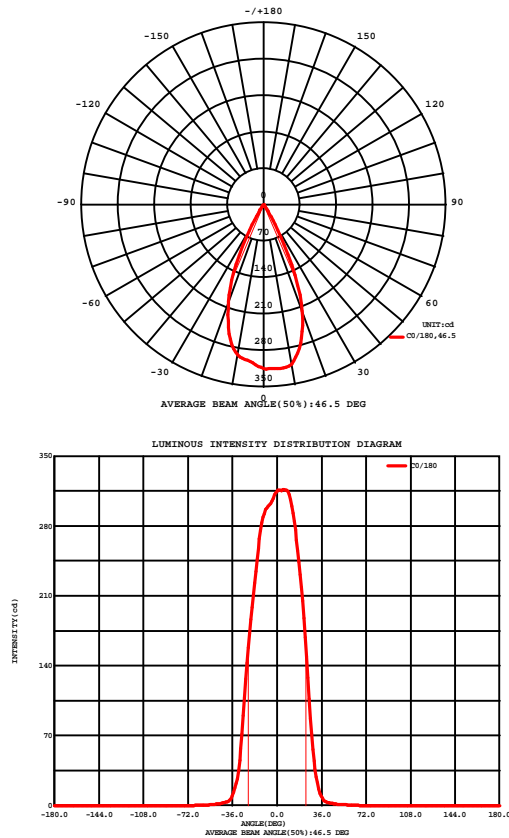


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2021-6-3

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: GWCSSRM2.CM-M3M5-XX37-1 Ra: 90
REFLECTOR: PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 46.73 lm/W			
MODEL	OSLON	I _{max} (cd)	317.6	S/MH(C0/180)	0.69
NOMINAL POWER(W)	3	LOR(%)	77.7	S/MH(C90/270)	0.67
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	171.46	h UP,DN(C0-180)	0.0,40.7
NOMINAL FLUX(lm)	220.65	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,37.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	h down(%)	77.7	CIBSE SHR MAX	0.70

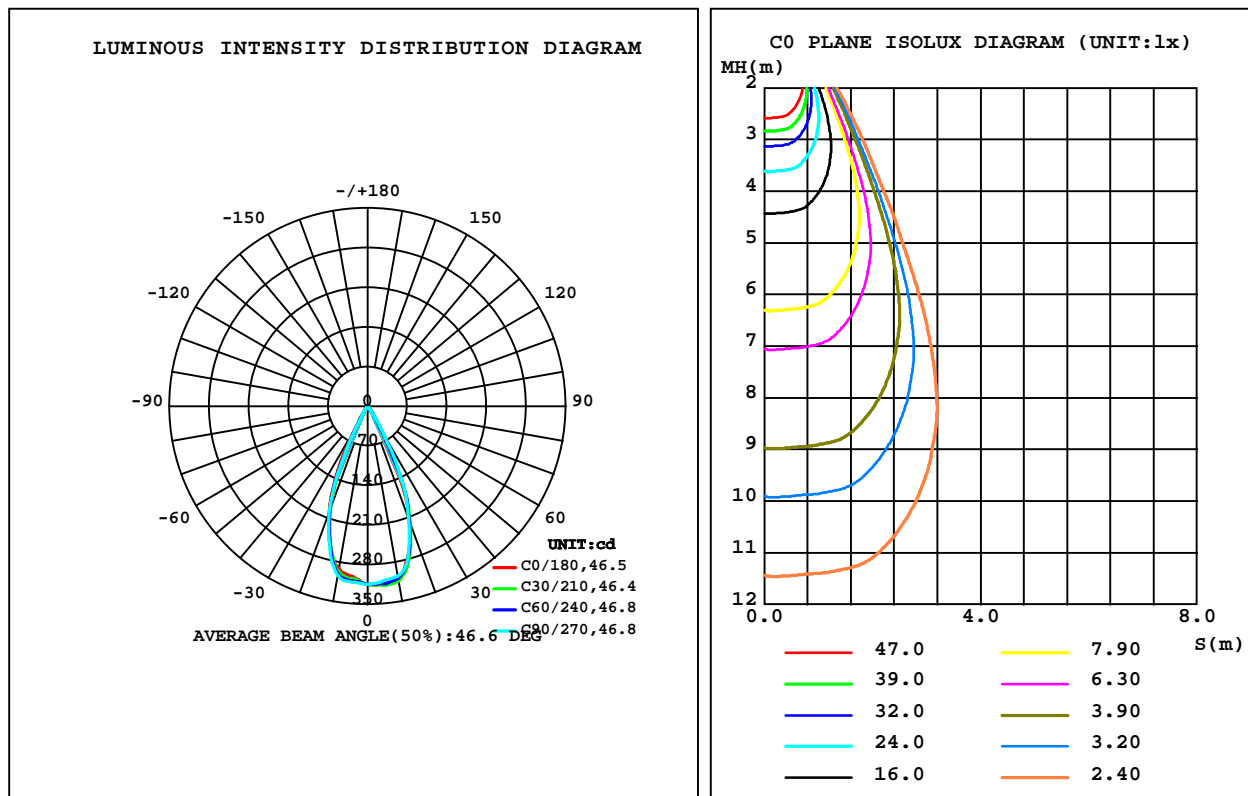

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	311.5	311.1	305.0	292.9	292.1	299.2	304.3	307.4	0- 10	29.42	29.42	17.2,13.3
20	218.0	219.0	214.4	207.5	198.3	194.1	198.2	211.9	10- 20	73.22	102.6	59.9,46.5
30	44.77	52.16	56.50	55.53	44.99	34.12	33.69	38.17	20- 30	55.90	158.5	92.5,71.9
40	3.623	5.234	5.025	5.051	3.758	4.055	3.778	4.099	30- 40	9.991	168.5	98.3,76.4
50	1.121	1.593	1.412	1.567	1.190	1.363	1.135	1.381	40- 50	1.950	170.5	99.4,77.3
60	0.4228	0.6465	0.4759	0.5035	0.3453	0.4124	0.3409	0.4407	50- 60	0.7689	171.3	99.9,77.6
70	0	0.0002	0	0.0082	0	0.0000	0	0	60- 70	0.2056	171.5	100,77.7
80	0	0	0	0	0	0	0	0	70- 80	0.0001	171.5	100,77.7
90	0	0	0	0	0	0	0	0	80- 90	0	171.5	100,77.7
100	0	0	0	0	0	0	0	0	90-100	0	171.5	100,77.7
110	0	0	0	0	0	0	0	0	100-110	0	171.5	100,77.7
120	0	0	0	0	0	0	0	0	110-120	0	171.5	100,77.7
130	0	0	0	0	0	0	0	0	120-130	0	171.5	100,77.7
140	0	0	0	0	0	0	0	0	130-140	0	171.5	100,77.7
150	0	0	0	0	0	0	0	0	140-150	0	171.5	100,77.7
160	0	0	0	0	0	0	0	0	150-160	0	171.5	100,77.7
170	0	0	0	0	0	0	0	0	160-170	0	171.5	100,77.7
180	0	0	0	0	0	0	0	0	170-180	0	171.5	100,77.7
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

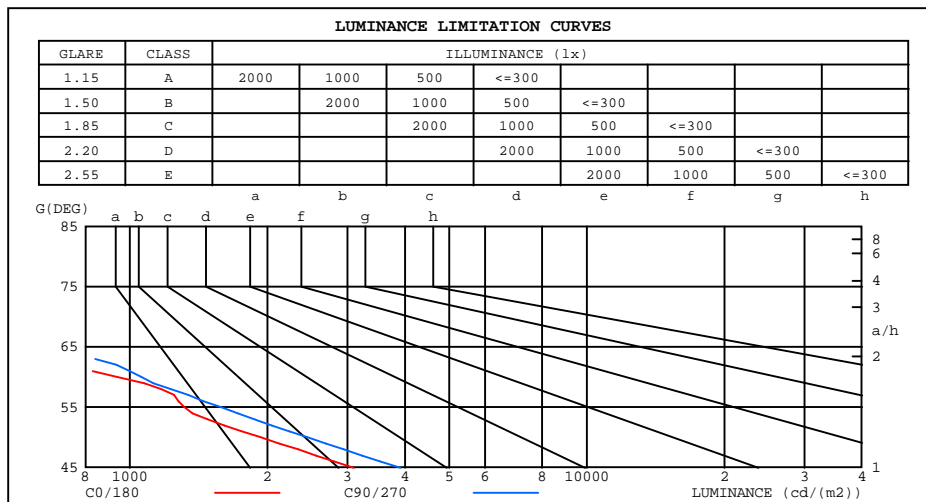


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

G Range: 0 - 180DEG
G Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

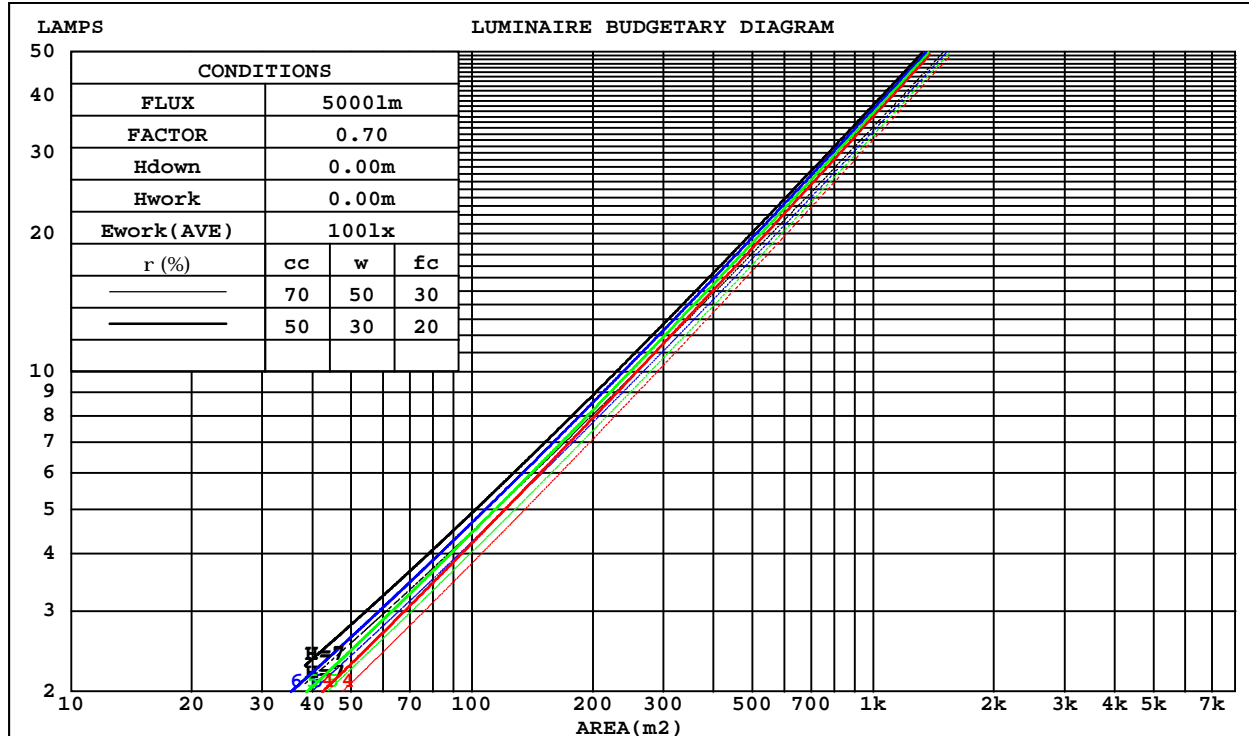

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

WEC AND CCEC

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.120	.068	.022	.115	.066	.021	.105	.060	.019	.096	.056	.018	.088	.051	.016	
2.0	.113	.062	.019	.109	.060	.018	.101	.056	.017	.093	.052	.016	.086	.049	.015	
3.0	.107	.057	.017	.103	.055	.017	.096	.052	.016	.090	.049	.015	.084	.047	.014	
4.0	.101	.053	.015	.098	.051	.015	.092	.049	.015	.087	.047	.014	.082	.044	.014	
5.0	.096	.049	.014	.093	.048	.014	.088	.046	.014	.084	.044	.013	.079	.042	.013	
6.0	.092	.046	.013	.089	.045	.013	.085	.044	.013	.081	.042	.012	.077	.041	.012	
7.0	.088	.043	.012	.086	.043	.012	.082	.041	.012	.078	.040	.012	.075	.039	.011	
8.0	.084	.041	.012	.082	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	
9.0	.081	.039	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	.071	.036	.010	
10.0	.078	.037	.010	.076	.037	.010	.073	.036	.010	.071	.035	.010	.068	.034	.010	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.148	.148	.148	.127	.127	.127	.086	.086	.086	.050	.050	.050	.016	.016	.016	
1.0	.132	.122	.114	.113	.105	.098	.077	.072	.068	.044	.042	.039	.014	.013	.013	
2.0	.119	.103	.090	.102	.089	.078	.070	.061	.054	.040	.036	.032	.013	.012	.010	
3.0	.108	.088	.072	.093	.076	.063	.064	.053	.044	.037	.031	.026	.012	.010	.008	
4.0	.099	.076	.059	.085	.066	.051	.058	.046	.036	.034	.027	.021	.011	.009	.007	
5.0	.092	.067	.049	.079	.058	.043	.054	.041	.030	.031	.024	.018	.010	.008	.006	
6.0	.085	.060	.041	.073	.052	.036	.051	.036	.025	.029	.021	.015	.009	.007	.005	
7.0	.080	.053	.035	.069	.046	.030	.048	.033	.022	.028	.019	.013	.009	.006	.004	
8.0	.075	.048	.030	.065	.042	.026	.045	.030	.019	.026	.017	.011	.008	.006	.004	
9.0	.071	.044	.026	.061	.038	.023	.043	.027	.016	.025	.016	.010	.008	.005	.003	
10.0	.068	.041	.023	.058	.035	.020	.041	.025	.014	.024	.015	.008	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm										
NAME: 1814.400-1-AM					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2106030348		
MFR.: RISE					SUR.:0.0009m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.4	11.1	10.6	11.3	11.5	11.0	11.8	11.2	11.9	12.1
3H	10.2	10.9	10.5	11.1	11.3	10.8	11.6	11.1	11.8	11.9
4H	10.1	10.8	10.4	11.0	11.2	10.8	11.4	11.0	11.7	11.9
6H	10.0	10.7	10.3	10.9	11.2	10.7	11.3	11.0	11.5	11.8
8H	10.0	10.6	10.3	10.9	11.1	10.6	11.2	10.9	11.5	11.7
12H	9.9	10.5	10.3	10.8	11.1	10.6	11.2	10.9	11.4	11.7
4H 2H	10.2	10.9	10.4	11.1	11.3	10.8	11.5	11.1	11.7	11.9
3H	10.0	10.6	10.3	10.9	11.1	10.6	11.2	10.9	11.5	11.8
4H	9.9	10.4	10.2	10.7	11.0	10.5	11.1	10.9	11.4	11.7
6H	9.8	10.3	10.2	10.6	11.0	10.4	10.9	10.8	11.2	11.6
8H	9.8	10.2	10.1	10.5	10.9	10.4	10.8	10.8	11.2	11.5
12H	9.7	10.1	10.1	10.5	10.9	10.3	10.7	10.7	11.1	11.5
8H 4H	9.8	10.2	10.1	10.5	10.9	10.4	10.8	10.8	11.2	11.5
6H	9.6	10.0	10.1	10.4	10.8	10.3	10.6	10.7	11.0	11.4
8H	9.6	9.9	10.0	10.3	10.8	10.2	10.5	10.7	10.9	11.4
12H	9.5	9.8	10.0	10.2	10.7	10.1	10.4	10.6	10.9	11.3
12H 4H	9.7	10.1	10.1	10.5	10.9	10.3	10.7	10.7	11.1	11.5
6H	9.6	9.9	10.0	10.3	10.8	10.2	10.5	10.7	10.9	11.4
8H	9.5	9.8	10.0	10.2	10.7	10.1	10.4	10.6	10.9	11.3
Variations with the observer position at spacings:										
S = 1.0H	+ 2.9 / - 6.2					+ 3.5 / - 6.5				
1.5H	+ 4.6 / - 4.6					+ 5.3 / - 4.4				
2.0H	+ 3.4 / - 4.4					+ 3.6 / - 4.4				

CIE Pub.117, 220.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -5.3)
Area: 0.0009 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	70	66	63	70	66	63	69	65	63	60
0.80	76	72	69	75	71	69	74	71	69	66
1.00	79	75	72	78	75	72	77	74	72	69
1.25	82	78	76	81	78	75	79	77	75	72
1.50	83	80	78	83	80	77	81	78	77	73
2.00	85	82	80	84	81	79	82	80	78	74
2.50	86	84	82	85	83	81	83	81	79	75
3.00	87	85	83	86	84	82	84	82	81	76
4.00	89	87	85	87	86	84	85	83	82	77
5.00	90	88	87	88	87	86	85	84	83	78
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

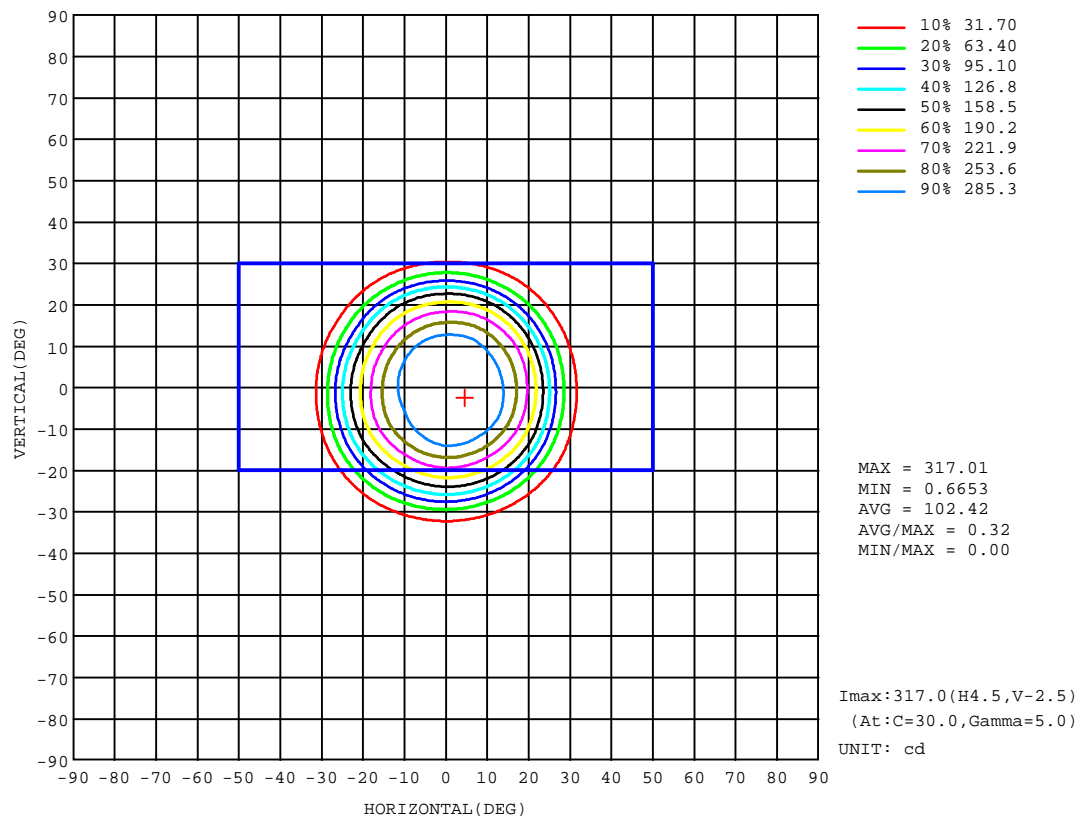


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

AAI Figure

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

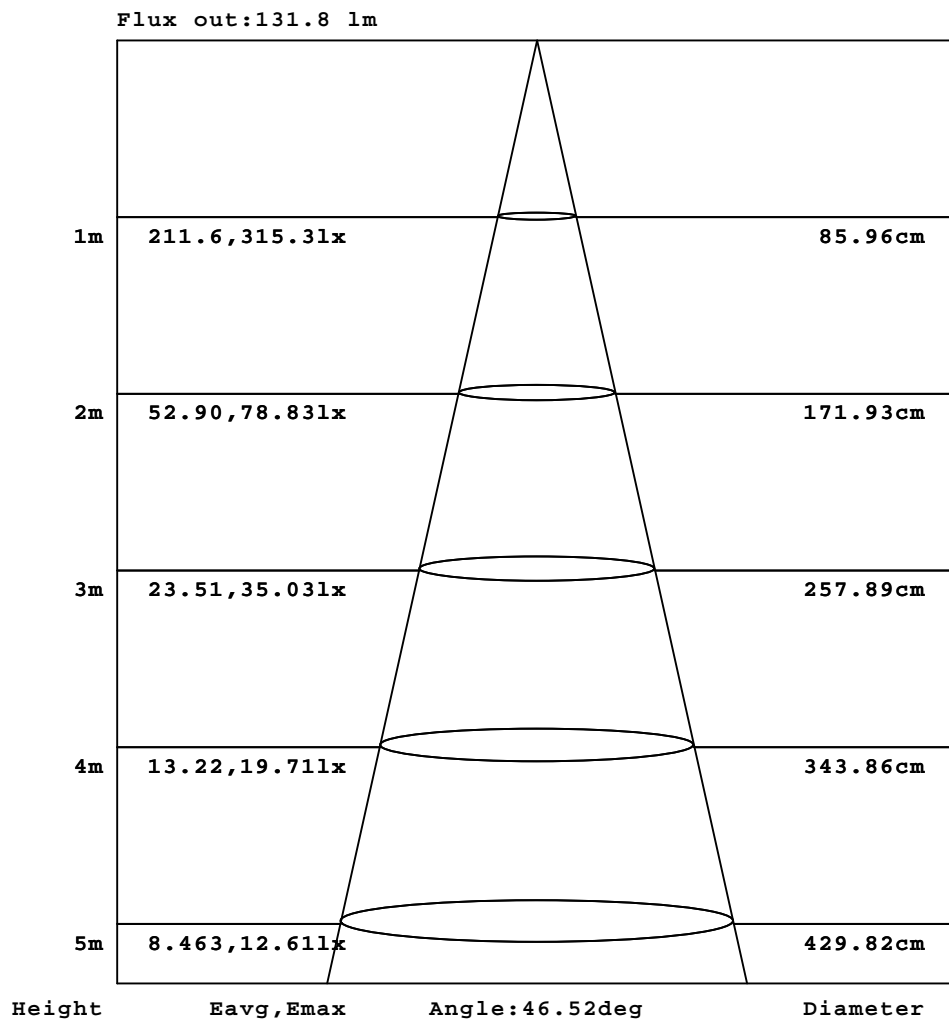


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

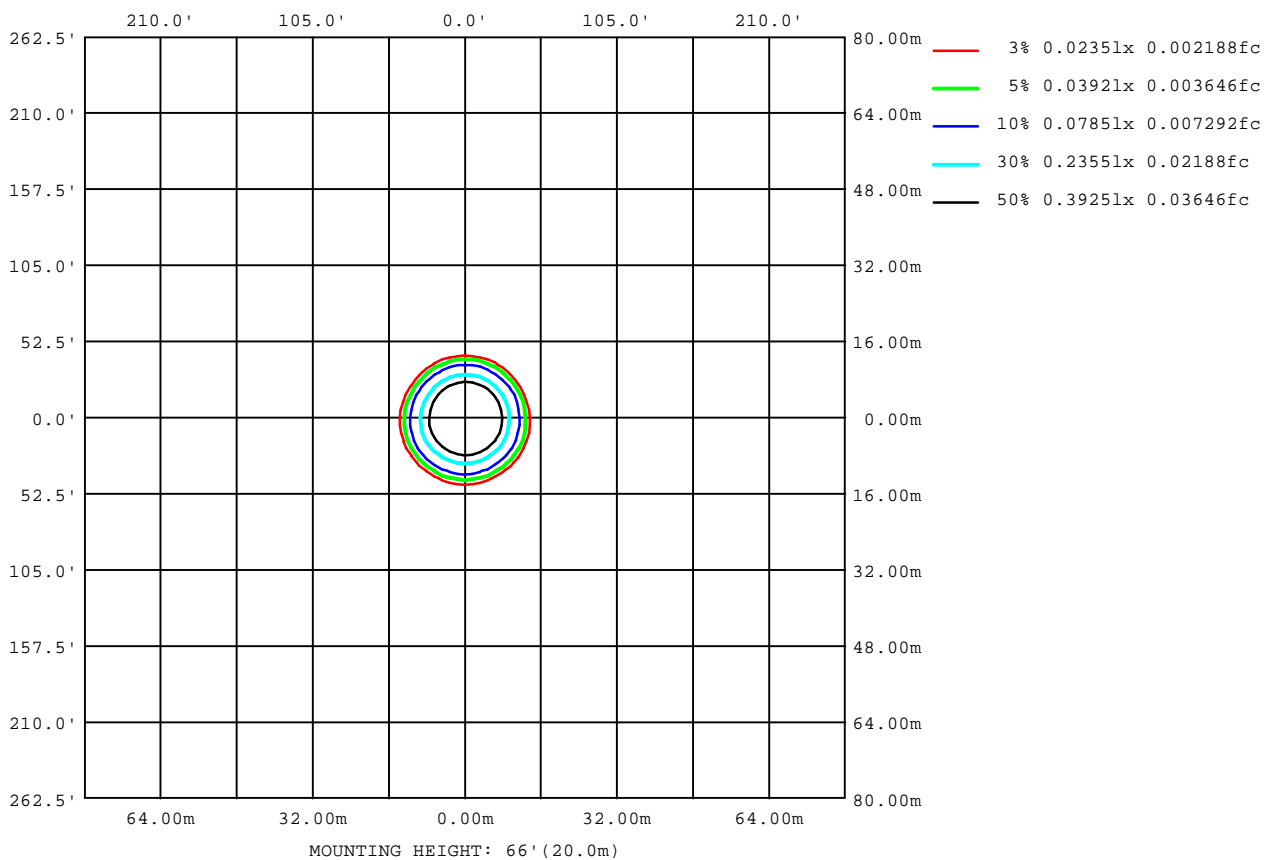

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

LED Avg.L Report

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	401
L_0~180(75)av	0
L_0~180(85)av	0
L_90~270(65)av	456
L_90~270(75)av	0
L_90~270(85)av	0
L_45(65)av	634
L_45(75)av	0
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up

Planar Illuminance Curve

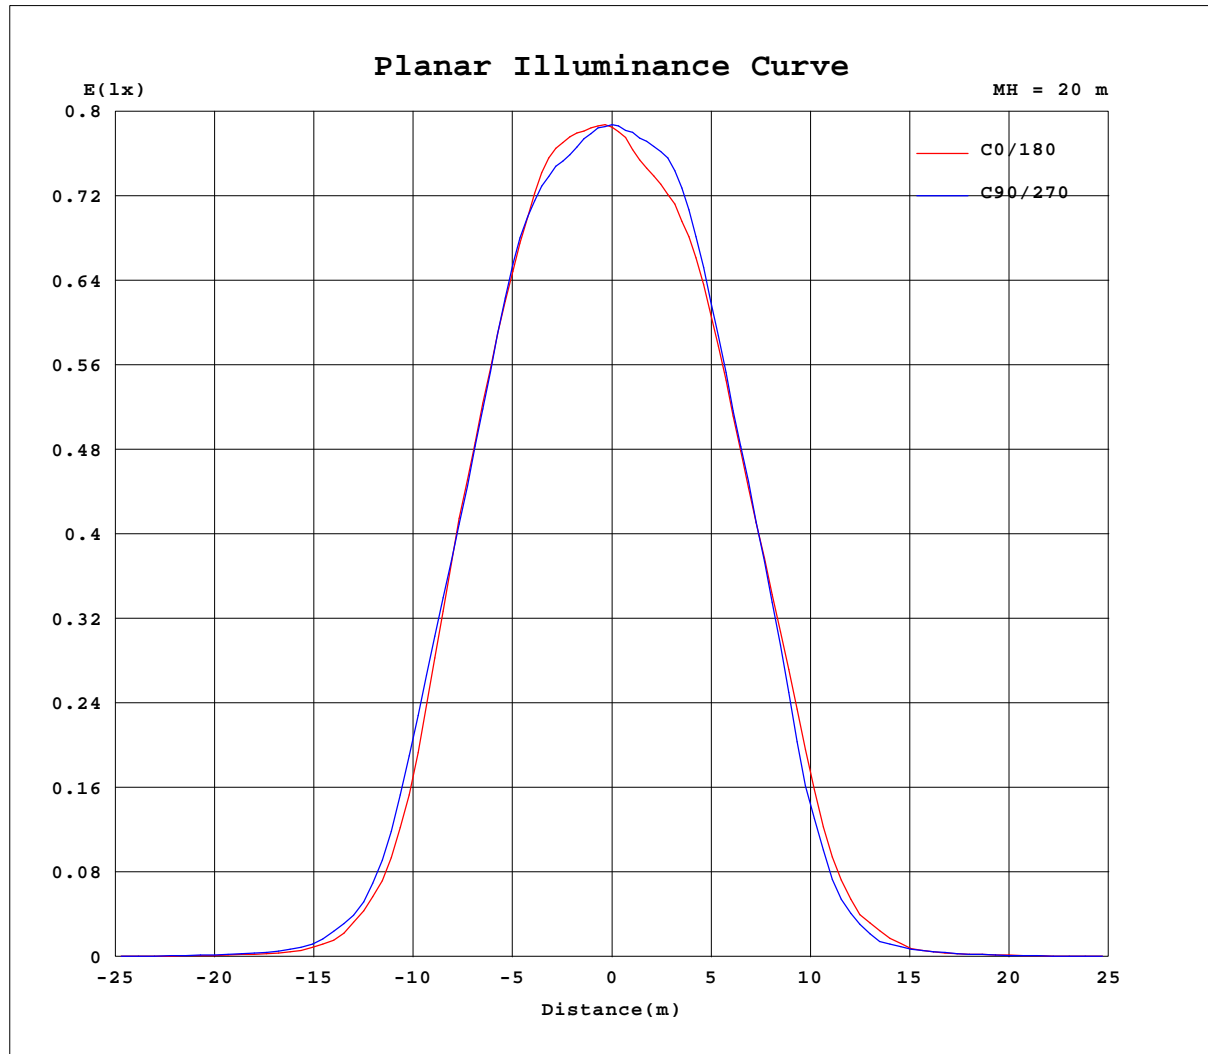

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Zoe
 Test Date: 2021-6-3

deg Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: GWCSSRM2.CM-M3M5-XX37-1 Ra:90
 REFLECTOR: PM-1056 45R
 DRIVER: LSC4W700P UNI 700mA
 30minutes warm-up

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.92V I:0.0489A P:3.6692W PF:0.6334 Freq:59.98Hz Lamp Flux:220.65x1 lm		
NAME: 1814.400-1-AM	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2106030348
MFR.: RISE	SUR.:0.0009m2	Shielding Angle:

Table--1

UNIT: cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	315	315	315	315	315	315	315	315	315	315	315	315						
5	316	318	314	310	304	301	303	306	310	312	313	314						
10	311	313	309	305	296	290	292	297	301	304	307	308						
15	276	282	278	276	269	264	257	255	256	261	269	270						
20	218	222	216	214	208	207	198	193	195	198	207	217						
25	128	141	142	143	138	138	126	110	111	109	114	119						
30	44.8	51.8	52.5	56.5	56.6	54.5	45.0	34.5	33.7	33.7	36.5	39.9						
35	11.7	16.3	16.1	17.7	15.9	14.9	13.0	9.07	8.38	8.91	8.79	9.73						
40	3.62	5.19	5.28	5.02	5.19	4.92	3.76	4.13	3.98	3.78	4.10	4.10						
45	1.98	2.54	2.86	2.49	2.88	2.58	2.09	2.37	2.35	2.02	2.49	2.13						
50	1.12	1.49	1.69	1.41	1.66	1.48	1.19	1.39	1.33	1.13	1.50	1.26						
55	0.68	0.95	1.12	0.82	0.97	0.86	0.64	0.82	0.75	0.66	0.89	0.89						
60	0.42	0.59	0.70	0.48	0.52	0.48	0.35	0.43	0.39	0.34	0.44	0.44						
65	0.14	0.26	0.32	0.24	0.26	0.25	0.16	0.20	0.24	0.10	0.17	0.16						
70	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2021-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:GWCSSRM2.CM-M3M5-XX37-1 Ra:90
REFLECTOR:PM-1056 45R
DRIVER: LSC4W700P UNI 700mA
30minutes warm-up