





KANO-II-1-TF

Product specification



INTERIOR COMBO LIGHTS

Cut out :
1¹⁸/₃₂" X 1¹⁸/₃₂"

Technical Specification

Article number	1814.400-1-AM
LED Consumption	2.2W (2.2W X1pcs)
Fixture Consumption	4.5W
Current / Voltage	700mA / -
CRI	90+
CCT	3000K
LED Lumen *1	200lm
Delivered Lumen	171lm
Beam Angle available	15°/30°/40°(Reflector)

Driver Technical Specification (Remoted)

Driver Brand	HEP	Driver Model	LSC4W700PUNI
Input voltage / Frequency range	100-277Vac / 50/60Hz	Output Current / Voltage	700mA / 12Vdc
Dimming / Flicker	Non / Free	Certification	UL
Power Factor	>0.9	Warranty	-

Technical character


Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	Damp Location
Tilt / Rotate	-
Operating temperature	0~35°C
Average Failure Time	L70(6k) >36000 (h)

Materials

Luminaire	extruded aluminum
Trim	SPCC
Optics	PC
Heat sink	extruded aluminum
Fixture color available	white / black
Baffle	PC
Baffle Color available	black / white / piano black

Accessories

Photometric



h(m)	D(m)	E(lx)
15°		
1.0	0.32	1094
2.0	0.65	273
3.0	0.97	121
4.0	1.30	68
5.0	1.63	43


Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS

ACCG-26A-LSC4W700P UNI

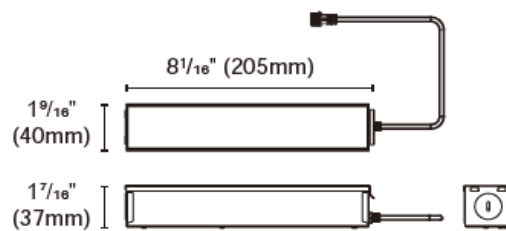

Inside: L 7 3/4" (197mm)X W 1 1/2" (38mm)X H 1 5/16" (34mm)

ACCG-25-69x272

