




KANO-II-2-TF



Product specification

INTERIOR COMBO LIGHTS



Cut out :
1¹⁷/₃₂" X 2¹⁸/₃₂"

Technical Specification

Article number	1814.400-2-AM
LED Consumption	2.2W (2.2W X2pcs)
Fixture Consumption	7W
Current / Voltage	700mA / -
CRI	90+
CCT	3000K
LED Lumen *1	200lm X2
Delivered Lumen	326lm
Beam Angle available	15°/30°/40°(Reflector)

Driver Technical Specification (Remoted)


Driver Brand	HEP	Driver Model	LSC4W700PUNI
Input voltage / Frequency range	100-277Vac / 50/60Hz	Output Current / Voltage	700mA / 12Vdc
Dimming / Flicker	Non / Free	Certification	UL
Power Factor	>0.9	Warranty	-

Technical character

Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	SPCC
Insulation	CLASS II	Optics	PC
Protection	Damp Location	Heat sink	extruded aluminum
Tilt / Rotate	-	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	black / white / piano black

Accessories

Photometric

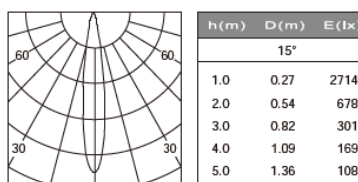


Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS

ACCG-26A-LSC4W700P UNI

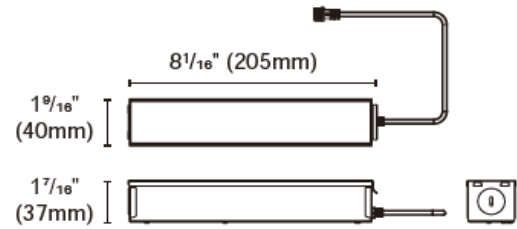

Inside: L $7\frac{3}{4}"$ (197mm)X W $1\frac{1}{2}"$ (38mm)X H $1\frac{5}{16}"$ (34mm)

ACCH-1-70x426

