




KANO-II-10-TA



Product specification

INTERIOR COMBO LIGHTS

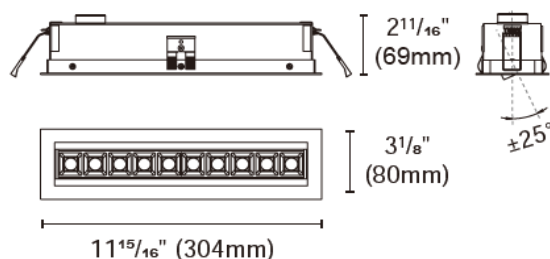

Cut out :
2²⁴/₃₂" X 1¹⁷/₃₂"

Technical Specification

Article number	1814.401-10-AM
LED Consumption	-
Fixture Consumption	21W
Current / Voltage	600mA / -
CRI	90+
CCT	3000K
LED Lumen ^{*1}	-
Delivered Lumen	1370m
Beam Angle available	15°/30°/40° (Reflector)

Driver Technical Specification (Remoted)


Driver Brand	YG	Driver Model	LBS30W-42-C0600-RD
Input voltage / Frequency range	100-277Vac / 50/60Hz	Output Current / Voltage	600mA / 21-42Vdc
Dimming / Flicker	0-10V dim / Free	Certification	ENEC/UL/CB
Power Factor	>0.9	Warranty	5years

Technical character

Products Standard	UL1598	Luminaire	extruded aluminum
Insulation	CLASS II	Trim	steel
Protection	Damp Location	Optics	plastic-PC
Tilt / Rotate	0~25° / None	Heat sink	extruded aluminum
Operating temperature	0~35°C	Fixture color available	white / black
Average Failure Time	L70(6k) >36000 (h)	Baffle	PC
		Baffle Color available	black
		Custom baffle colour	White/Gold/Chrome/Rosegold

Accessories

Photometric



h(m)	D(m)	E(lx)
15°		
1.0	0.26	13320
2.0	0.53	3330
3.0	0.80	1480
4.0	1.07	832
5.0	1.34	532


Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS

ACCG-20A-LBS30W-42-C0600-RD

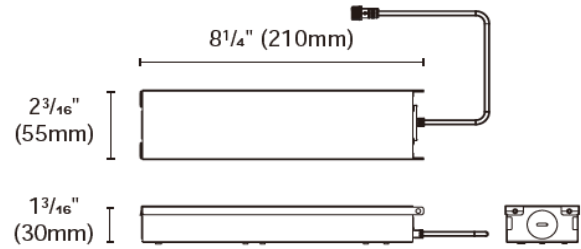

Inside: L 7 ⁷/₈" (200mm)X W 2 ¹/₁₆" (53mm)X H 1 ¹/₁₆" (27mm)

ACCH-1-70x426

