




## KANO-II-15-TA



## Product specification

## INTERIOR COMBO LIGHTS

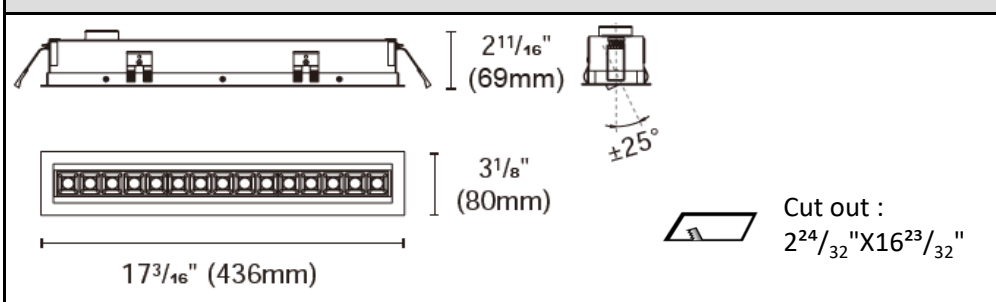

## Technical Specification

|                         |                         |
|-------------------------|-------------------------|
| Article number          | 1814.401-15-AM          |
| LED Consumption         | -                       |
| Fixture Consumption     | 28W                     |
| Current / Voltage       | 550mA / -               |
| CRI                     | 90+                     |
| CCT                     | 3000K                   |
| LED Lumen <sup>*1</sup> | -                       |
| Delivered Lumen         | 1969m                   |
| Beam Angle available    | 15°/30°/40° (Reflector) |

## Driver Technical Specification (Remoted)


|                                 |                      |                          |                    |
|---------------------------------|----------------------|--------------------------|--------------------|
| Driver Brand                    | YG                   | Driver Model             | LBS30W-48-C0550-RD |
| Input voltage / Frequency range | 100-277Vac / 50/60Hz | Output Current / Voltage | 550mA / 24-48Vdc   |
| Dimming / Flicker               | 0-10V dim / Free     | Certification            | ENEC/UL/CB         |
| Power Factor                    | >0.9                 | Warranty                 | 5years             |

## Technical character

|                       |                    |                         |                            |
|-----------------------|--------------------|-------------------------|----------------------------|
| Products Standard     | UL1598             | Luminaire               | extruded aluminum          |
|                       |                    | Trim                    | steel                      |
| Insulation            | CLASS II           | Optics                  | plastic-PC                 |
| Protection            | Damp Location      | Heat sink               | extruded aluminum          |
| Tilt / Rotate         | 0~25° / None       | Fixture color available | white / black              |
| Operating temperature | 0~35°C             | Baffle                  | PC                         |
| Average Failure Time  | L70(6k) >36000 (h) | Baffle Color available  | black                      |
|                       |                    | Custom baffle colour    | White/Gold/Chrome/Rosegold |

## Accessories

## Photometric

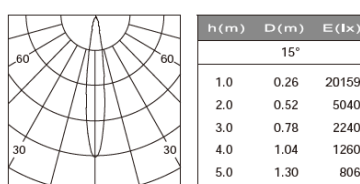


## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS

ACCG-20A-LBS30W-48-C0550-RD

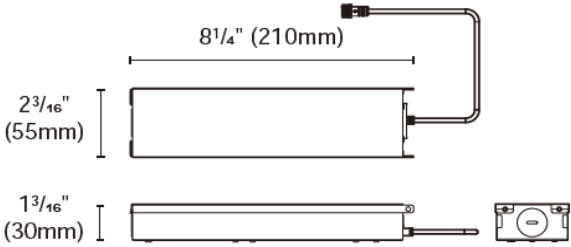

Inside: L  $7\frac{7}{8}"$  (200mm)X W  $2\frac{1}{16}"$  (53mm)X H  $1\frac{1}{16}"$  (27mm)

ACCH-1-70x426

