




KANO-II-5-TA



Product specification

INTERIOR COMBO LIGHTS

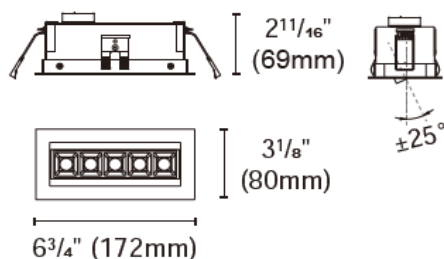

Cut out :
2²⁴/₃₂" X 6¹⁰/₃₂"

Technical Specification

Article number	1814.401-5-AM
LED Consumption	-
Fixture Consumption	12W
Current / Voltage	600mA / -
CRI	90+
CCT	3000K
LED Lumen *1	-
Delivered Lumen	679m
Beam Angle available	15°/30°/40° (Reflector)

Driver Technical Specification (Remoted)


Driver Brand	YG	Driver Model	LBS12W-16-C0600-RD
Input voltage / Frequency range	100-277Vac / 50/60Hz	Output Current / Voltage	600mA / 8-16Vdc
Dimming / Flicker	0-10V dim / Free	Certification	ENEC/UL/CB
Power Factor	>0.9	Warranty	5years

Technical character

Products Standard	UL1598	Luminaire	extruded aluminum
Insulation	CLASS II	Trim	steel
Protection	Damp Location	Optics	plastic-PC
Tilt / Rotate	0~25° / None	Heat sink	extruded aluminum
Operating temperature	0~35°C	Fixture color available	white / black
Average Failure Time	L70(6k) >36000 (h)	Baffle	PC
		Baffle Color available	black
		Custom baffle colour	White/Gold/Chrome/Rosegold

Accessories

Photometric



h (m)	D (m)	E (lx)
		15°
1.0	0.25	7253
2.0	0.51	1813
3.0	0.77	805
4.0	1.03	453
5.0	1.29	290


Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS

ACCG-20A-LBS12W-16-C0600-RD

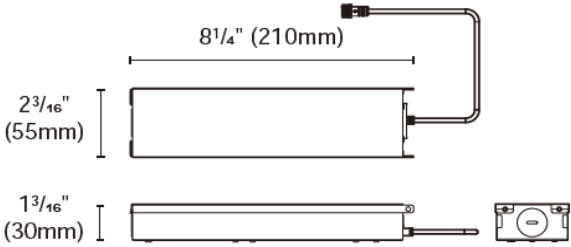

Inside: L $7\frac{7}{8}"$ (200mm)X W $2\frac{1}{16}"$ (53mm)X H $1\frac{1}{16}"$ (27mm)

ACCH-1-70x426

