




KANO-II-4-TF



Product specification

INTERIOR COMBO LIGHTS



Cut out :
2²⁰/₃₂" X 2²³/₃₂"

Technical Specification

Article number	1814.413-4-AM
LED Consumption	2.2W (2.2W X4pcs)
Fixture Consumption	11W
Current / Voltage	700mA / -
CRI	90+
CCT	3000K
LED Lumen ^{*1}	200lm X4
Delivered Lumen	656lm
Beam Angle available	15°/30°/40°(Reflector)

Driver Technical Specification (Remoted)

Driver Brand	YG	Driver Model	LBS12W-16-C0700-RD
Input voltage / Frequency range	100-277Vac / 50/60Hz	Output Current / Voltage	700mA / -
Dimming / Flicker	0-10V / Free	Certification	ENEC/UL/CB
Power Factor	>0.9	Warranty	-

Technical character


Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	Damp Location
Tilt / Rotate	-
Operating temperature	0~35°C
Average Failure Time	L70(6k) >36000 (h)
IC Rating	IC

Materials

Luminaire	extruded aluminum
Trim	SPCC
Optics	PC
Heat sink	extruded aluminum
Fixture color available	white / black
Baffle	PC
Baffle Color available	black / white / piano black

Accessories

Photometric



h(m)	D(m)	E(lx)
		15°
1.0	0.27	4956
2.0	0.54	1239
3.0	0.82	550
4.0	1.09	309
5.0	1.36	198


Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS

ACCG-20A-LBS12W-16-C0700-RD

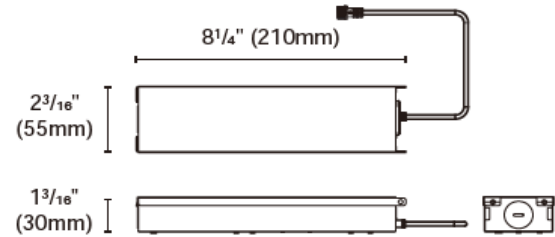

Inside: L 7 7/8" (200mm)X W 2 1/16" (53mm)X H 1 1/16" (27mm)

ACCG-25-69x272

