


DOTA



Product specification

INTERIOR TRACK LIGHT

Installation	Track light
Cut out	-
Dimension	221x77 x 120mm

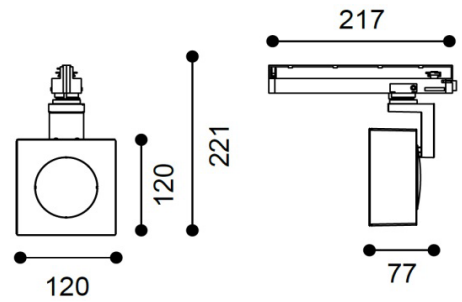

Technical description

Article number	1819.229		
LED Consumption	25.5W		
Current	700mA		
CCT	2700K	3000K	4000K
Lumen ^{*1}	2565lm	2670lm	2712lm
Øsystem ^{*3}	-	-	-
Voltage	36.5V		
Reflector	10°/20°/35°		
CRI	90+		
Driver	Built-in, I/P : 120~240V 50/60Hz O/P : 36.5V 700mA		

Technical character

Insulation	CLASS II
Protection	IP 20
Tilt	0~90°
Rotate	0~355°
Operating temperature	-20~40 °C
Average Failure Time	L70(10k) >60000 (h)

Materials

Luminaire	aluminum die cast
Reflector	optic lens
Heat sink	aluminum die cast
Color available	white / black

Package

inner box	mm 0 kg
outer box	mm 0 kg / 0 in 1

Accessories


Flood diffuser, Flood diffuser

Oval flood diffuser, Framing diffuser, Wallwash diffuser

Remarks



Photometric



*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,
this is the real lumen with the loss because of different design of reflectors and fixtures.