
# ARISE

### DEINO



# Product specification

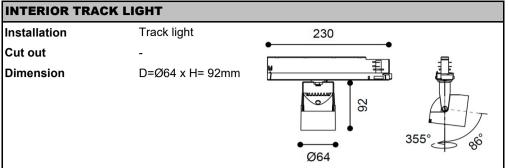

Technical description				
Article number	1819.231			
LED Consumption	14.8W			
Current	400mA			
сст	2700K	3000K	4000K	
Lumen <sup>*1</sup>	1495lm	1552lm	1579lm	
Øsystem <sup>*3</sup>	-	-	-	
Voltage	37.1V			
Reflector	15°/25°/50°			
CRI	90+			
Driver	Built-in, I/P:120-240Vac			
	O/P:16-38	O/P:16-38Vdc 15W		

Technical character		Materials		
Insulation	CLASS II	Luminaire	aluminum die cast	
Protection	IP 20	Reflector	plastic-PC	
Tilt	0~86°	Color available	white / black	
Rotate	0~355°			
Operating temperature	-20~40 °C			
Average Failure Time	L70(6k) >36000 (h)			

#### Package

inner box outer box mm 0 kg mm 0 kg / 0 in 1

#### Accessories

SG8-1, H12-1, DS7-1

# Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

# Photometric

