
ARISE

DEINO



Product specification

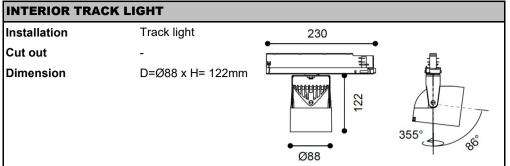

Technical description				
Article number	1819.232			
LED Consumption	25.5W			
Current	700mA			
сст	2700K	3000K	4000K	
Lumen ^{*1}	2565lm	2670lm	2712lm	
Øsystem ^{*3}	-	-	-	
Voltage	36.5V			
Reflector	15°/25°/35°			
CRI	90+			
Driver	Built-in, I/P:	Built-in, I/P:120-240Vac		
	O/P:16-38Vdc 26W			

Technical character		
Insulation	CLASS II	
Protection	IP 20	
Tilt	0~86°	
Rotate	0~355°	
Operating temperature	-20~40 °C	
Average Failure Time	L70(10k) >60000 (h)	

Materials	
Luminaire	aluminum die cast
Reflector	plastic-PC
Color available	white / black

Package

inner box outer box

mm 0 kg / 0 in 1

mm 0 kg

Accessories

SG8-2, H12-2, DS7-2

Remarks



*1. LUMEN : for LED chip test result based on Tc=85 $^{\circ}$ C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric

