





KANO-II-15-TA



Product specification

INTERIOR COMBO LIGHTS

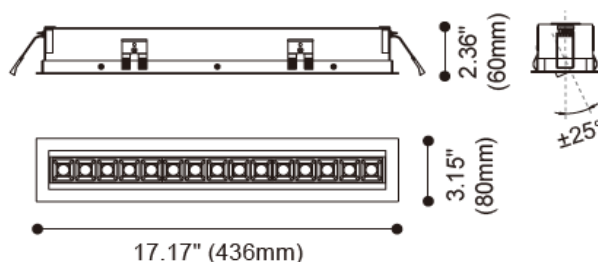

Technical Specification

Article number	1914.413-15
LED Consumption	33W
Fixture Consumption	-
Current / Voltage	700mA / -
CRI	90+
CCT	3000K
LED Lumen ^{*1}	-
Delivered Lumen	2313lm
Beam Angle available	15°/30°/40° (Reflector)

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character


Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP20
Tilt / Rotate	0~25° / None
Operating temperature	0~35°C
Average Failure Time	L70(6k) >36000 (h)

Materials

Luminaire	extruded aluminum
Trim	steel
Optics	plastic-PC
Heat sink	extruded aluminum
Fixture color available	white / black
Baffle	PC
Baffle Color available	black
Custom baffle colour	White/Gold/Chrome/Rosegold

Accessories

Photometric

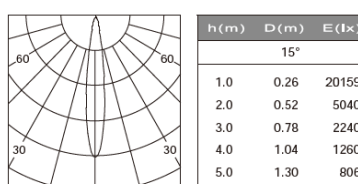

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.