





## KANO-III-10-TLA



## Product specification

## INTERIOR COMBO LIGHTS

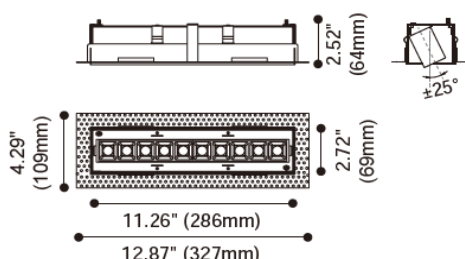

## Technical Specification

Article number	1914.416-10
LED Consumption	22W
Fixture Consumption	-
Current / Voltage	700mA / -
CRI	90+
CCT	3000K
LED Lumen <sup>*1</sup>	-
Delivered Lumen	1540lm
Beam Angle available	15°/30°/40° (Reflector)

## Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

## Technical character


Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP20
Tilt / Rotate	0~25° / None
Operating temperature	0~35°C
Average Failure Time	L70(6k) >36000 (h)

## Materials

Luminaire	extruded aluminum
Trim	steel
Optics	plastic-PC
Heat sink	extruded aluminum
Fixture color available	white / black
Baffle	PC
Baffle Color available	black
Custom baffle colour	White/Gold/Chrome/Rosegold

## Accessories

## Photometric



h (m)	D (m)	E (lx)
15°		
1.0	0.26	13320
2.0	0.53	3330
3.0	0.80	1480
4.0	1.07	832
5.0	1.34	532

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.