




KANO-II-15-TLA



Product specification

INTERIOR COMBO LIGHTS

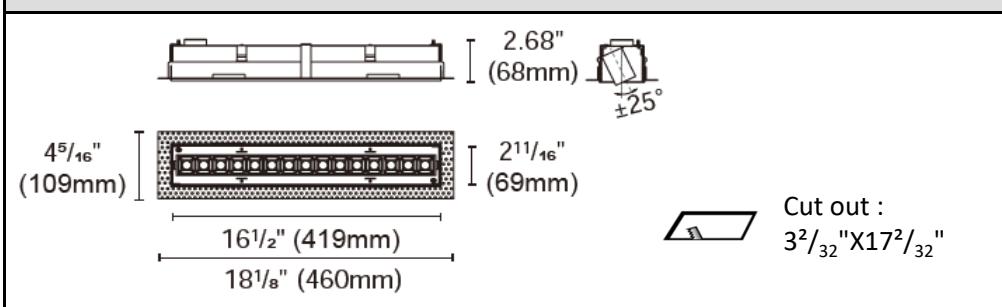

Technical Specification

Article number	1914.429-15-AM
LED Consumption	-
Fixture Consumption	28W
Current / Voltage	550mA / -
CRI	90+
CCT	3000K
LED Lumen *1	-
Delivered Lumen	1969m
Beam Angle available	15°/30°/40° (Reflector)


Driver Technical Specification (Remoted)

Driver Brand	YG	Driver Model	LBS30W-48-C0550-RD
Input voltage / Freqency range	100-277Vac / 50/60Hz	Output Current / Voltage	550mA /24-48Vdc
Dimming / Flicker	0-10V dim / Free	Certification	ENEC/UL/CB
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	UL1598	Luminaire	extruded aluminum
		Trim	steel
Insulation	CLASS II	Optics	plastic-PC
Protection	Damp Location	Heat sink	extruded aluminum
Tilt / Rotate	0~25° / None	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	black
		Custom baffle colour	White/Gold/Chrome/Rosegold

Accessories

Photometric




h(m)	D(m)	E(lx)
15°		
1.0	0.26	20159
2.0	0.52	5040
3.0	0.78	2240
4.0	1.04	1260
5.0	1.30	806

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

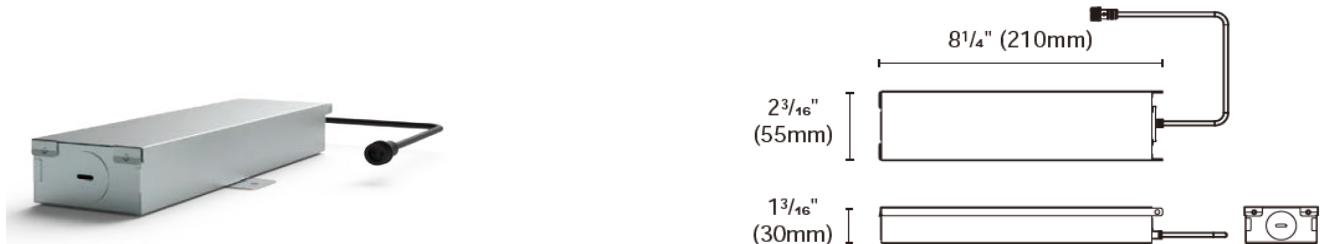INSTALLATION OPTIONS**ACCG-20A-LBS30W-48-C0550-RD**

Inside: L 7 7/8" (200mm) X W 2 1/16" (53mm) X H 1 1/16" (27mm)

ACCH-1-78X432