



AMAFI-85V

Product specification




INTERIOR RECESSED DOWN LIGHT

Installation Ceiling recessed

Cut out 75 x75

Dimension D=74 x H= 82

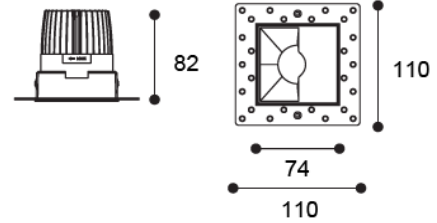

Technical description

| | |
|-----------------------|--|
| Article number | 1918.221 |
| LED Consumption | 13W |
| Current | 350mA |
| CCT | 3000K |
| Lumen ^{*1} | 1387lm |
| Øsystem ^{*3} | - |
| Voltage | - |
| Reflector | Wallwash |
| | - |
| CRI | 90+ |
| Driver | Remoted, I/P : 90-264V 50/60HZ O/P : 12-48V 350mA 16w Max |

Technical character

| | |
|-----------------------|---------------------|
| Insulation | CLASS II |
| Protection | IP44 |
| Tilt | 0~30° |
| Rotate | - |
| Operating temperature | -20~40°C |
| Average Failure Time | L70(10k) >60000 (h) |

Materials

| | |
|------------------------|--|
| Luminaire | aluminum die cast |
| Baffle | ABS |
| Bezel | ADC12 |
| Reflector | plastic-PC |
| Heat sink | forged aluminum |
| Bezel available color | white/black |
| Baffle available color | chrome/white/black/matt black/mirror black/piano black/champagne |

Package

| | | | |
|-----------|---|----|---------------|
| inner box | - | mm | 1 kg |
| outer box | - | mm | 0 kg / 0 in 1 |

Accessories



Remarks



*1. LUMEN (Typical Pulsed Flux) : for LED chip test result based on Tj=25°C", the ambient temperature at 25°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,
this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric