





GRAEAE-II-40-SSF

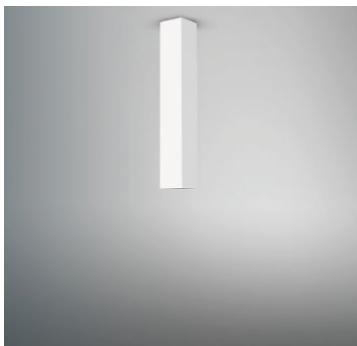

## Product specification

## INTERIOR SURFACE MOUNTED CEILING LIGHTS



## Technical Specification

Article number	2013.138		
LED Consumption	7W		
Fixture Consumption	-		
Current / Voltage	350mA / 17.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen *1	618lm	656lm	716lm
Delivered Lumen	-	-	-
Beam Angle available	18°/23°/35°(Lens)		

## Driver Technical Specification (Built-in)

Driver Brand	MEAN WELL	Driver Model	APC-8-350
Input voltage / Freqency range	90-264Vac / 50/60Hz	Output Current / Voltage	350mA / 11-23Vdc
Dimming / Flicker	Non / Free	Certification	ENEC / CE / CCC / UL
Power Factor	>0.9	Warranty	2years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC Lens
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	-	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L80(11k)>61000(h)	Baffle Color available	white / black / copper

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.