




GRAEAE-II-70-RSFSP



Product specification

INTERIOR SURFACE MOUNTED CEILING LIGHTS

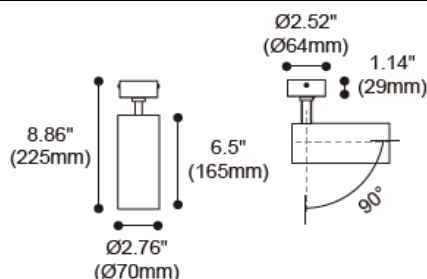

Technical Specification

Article number	2013.202		
LED Consumption	26W		
Fixture Consumption	-		
Current / Voltage	700mA / 36Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	2753lm	2918lm	3186lm
Delivered Lumen	-	-	-
Beam Angle available	18°/23°/36°(Lens)		

Driver Technical Specification (Built-in)

Driver Brand	HEP	Driver Model	LNC30W700LRP
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 25-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/SAI/CCC/CE
Power Factor	>0.9	Warranty	5years

Technical character


Products Standard	IEC 60598-1	Luminaire	Forged aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L80(10k)55400(h)	Baffle Color available	white / black / copper

Materials

Accessories

ACSG-7
striped glassACHO-10
Honeycomb louverACWG-8
Woven glassACSN-10
Long snoot

Photometric

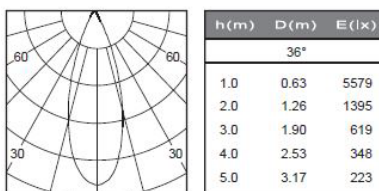

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.