




GRAEAE-II-40-RSFSP

Product specification



INTERIOR SURFACE MOUNTED CEILING LIGHTS

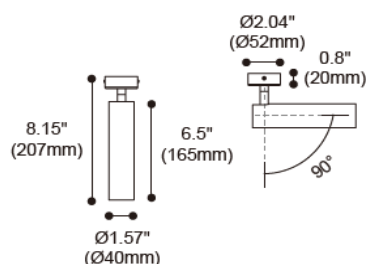

Technical Specification

Article number	2013.204		
LED Consumption	7W		
Fixture Consumption	-		
Current / Voltage	350mA / 17.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	618lm	656lm	716lm
Delivered Lumen	-	-	-
Beam Angle available	18°/23°/35°(Lens)		

Driver Technical Specification (Built-in)

Driver Brand	MEAN WELL	Driver Model	APC-8-350
Input voltage / Frequency range	90-264Vac / 50/60Hz	Output Current / Voltage	350mA / 11-23Vdc
Dimming / Flicker	Non / Free	Certification	ENEC / CE / CCC / UL
Power Factor	>0.9	Warranty	2years

Technical character


Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP20
Tilt / Rotate	0~90° / 0~355°
Operating temperature	0~35°C
Average Failure Time	L80(11k)>61000(h)

Materials

Luminaire	extruded aluminum
Trim	-
Optics	PC Lens
Heat sink	extruded aluminum
Fixture color available	white / black
Baffle	PC
Baffle Color available	white / black / copper

Accessories

Photometric

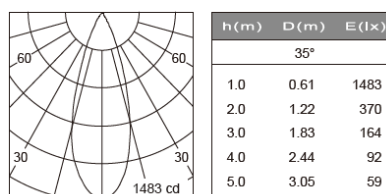

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.