




EPIC-110-RTLA-10



Product specification

INTERIOR RECESSED DOWNLIGHTS

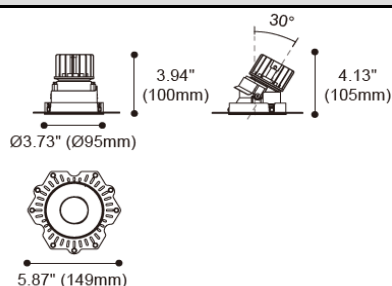

100

Technical Specification

Article number	2018.260F-ACOT-35
LED Consumption	10W
Fixture Consumption	12W
Current / Voltage	800mA / 12Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	784lm
Delivered Lumen	615lm
Beam Angle available	10°

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	120-240Vac / 50/60Hz	Output Current / Voltage	800mA / -
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-


Technical character

Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP44
Tilt / Rotate	0~30° / 0~355°
Operating temperature	0~35°C
Average Failure Time	L70(12k) >72600(h)

Materials

Luminaire	Aluminum die cast
Trim	Aluminum die cast
Optics	PC Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	Aluminum die cast
Baffle Color available	white / black

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass

h (m)	D (m)	E (lx)
10°		
1.0	0.17	11085
2.0	0.34	2771
3.0	0.51	1232
4.0	0.68	692
5.0	0.85	443

ACOT-109
Suction cup

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.