




EPIC-110-RTLA



Product specification

INTERIOR RECESSED DOWNLIGHTS

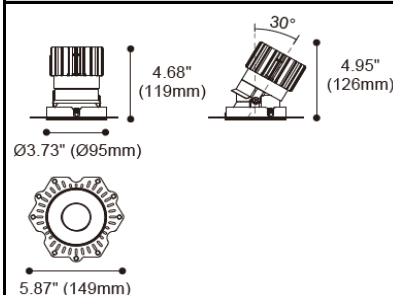

100

Technical Specification

Article number	2018.260F-ACOT-72		
LED Consumption	25W		
Fixture Consumption	25W		
Current / Voltage	700mA / 35.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	2763lm	2873lm	2918lm
Delivered Lumen	-	2140lm	-
Beam Angle available	30°/40°/50°/60°		

Driver Technical Specification (Remoted)


Driver Brand	PHILIPS	Driver Model	929002819480
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 32-42Vdc
Dimming / Flicker	Non / Free	Certification	CE/ENEC/CCC
Power Factor	>0.9	Warranty	2 years

Technical character


Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(9k)50000(h)	Baffle Color available	white / black

Materials

Accessories

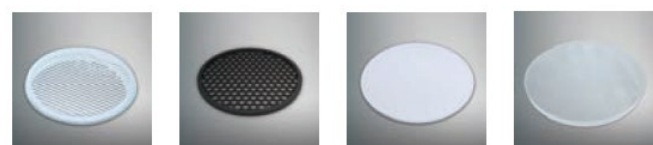SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cupACOT-82
MR16 Accessory kitsACOT-83
GU10 Accessory kitsPJ-0079
MR16&GU10 Accessory

Photometric

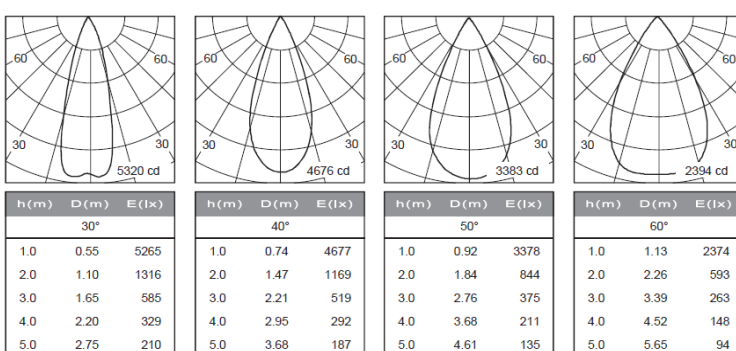

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.