



EPIC-110-RTLW

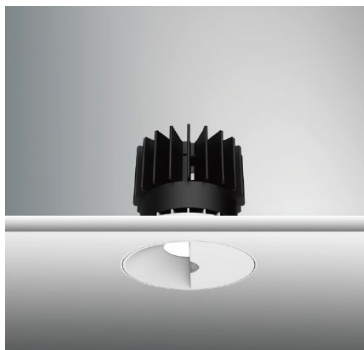

Product specification

INTERIOR RECESSED DOWNLIGHTS



Technical Specification


Article number	2018.261F-ACOT-72		
LED Consumption	25W		
Fixture Consumption	25W		
Current / Voltage	700mA / 35.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	2763lm	2873lm	2918lm
Delivered Lumen	-	1385lm	-
Beam Angle available	Wallwash		

Driver Technical Specification (Remoted)


Driver Brand	PHILIPS	Driver Model	929002819480
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 32-42Vdc
Dimming / Flicker	Non / Free	Certification	CE/ENEC/CCC
Power Factor	>0.9	Warranty	2 years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(9k)>50000(h)	Baffle Color available	white / black

Accessories

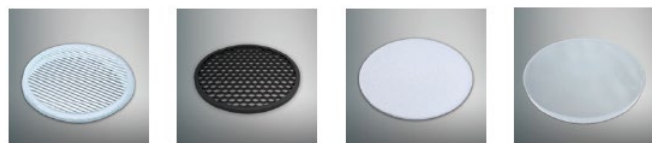SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass

Photometric



h (m)	D (m)	E (lx)
Wallwash		
1.0	0.85	1455
2.0	1.71	363
3.0	2.56	161
4.0	3.41	90
5.0	4.27	58

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.