






## EPIC-110-STLF

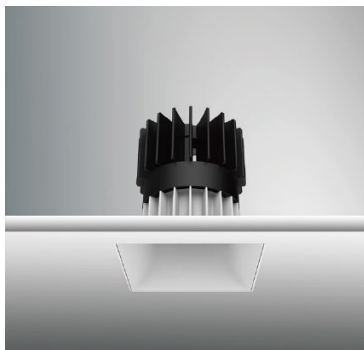

## Product specification

## INTERIOR RECESSED DOWNLIGHTS



## Technical Specification

|                         |                   |        |        |
|-------------------------|-------------------|--------|--------|
| Article number          | 2018.264A-ACOT-72 |        |        |
| LED Consumption         | 25W               |        |        |
| Fixture Consumption     | 25W               |        |        |
| Current / Voltage       | 700mA / 35.5Vdc   |        |        |
| CRI                     | 90+               |        |        |
| CCT                     | 2700K             | 3000K  | 4000K  |
| LED Lumen <sup>*1</sup> | 2763lm            | 2873lm | 2918lm |
| Delivered Lumen         | -                 | 2226lm | -      |
| Beam Angle available    | 30°/40°/50°/60°   |        |        |

## Driver Technical Specification (Remoted)


|                                 |                      |                          |                  |
|---------------------------------|----------------------|--------------------------|------------------|
| Driver Brand                    | PHILIPS              | Driver Model             | 929002819480     |
| Input voltage / Frequency range | 220-240Vac / 50/60Hz | Output Current / Voltage | 700mA / 32-42Vdc |
| Dimming / Flicker               | Non / Free           | Certification            | CE/ENEC/CCC      |
| Power Factor                    | >0.9                 | Warranty                 | 2 years          |

| Technical character   |                  | Materials               |                   |
|-----------------------|------------------|-------------------------|-------------------|
| Products Standard     | IEC 60598-1      | Luminaire               | Aluminum die cast |
|                       | IEC 62031        | Trim                    | Aluminum die cast |
| Insulation            | CLASS II         | Optics                  | PMMA Lens         |
| Protection            | IP44             | Heat sink               | Forged aluminum   |
| Tilt / Rotate         | Non / Non        | Fixture color available | white / black     |
| Operating temperature | 0~35°C           | Baffle                  | Aluminum die cast |
| Average Failure Time  | L70(9k)>50000(h) | Baffle Color available  | white / black     |

## Accessories



## Photometric

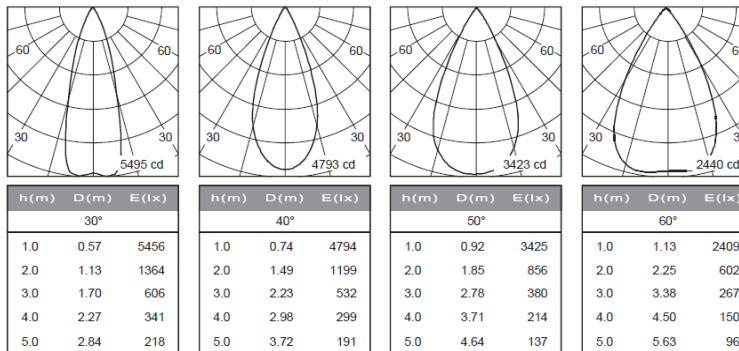

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.