





EPIC-110-STLA



Product specification

INTERIOR RECESSED DOWNLIGHTS

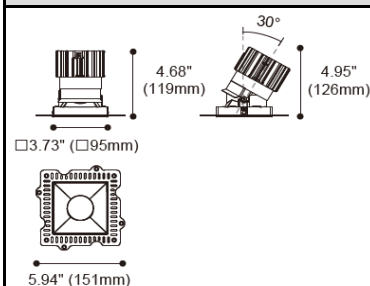

Technical Specification

Article number	2018.265A-ACOT-72		
LED Consumption	25W		
Fixture Consumption	25W		
Current / Voltage	700mA / 35.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	2763lm	2873lm	2918lm
Delivered Lumen	-	2174lm	-
Beam Angle available	30°/40°/50°/60°		

Driver Technical Specification (Remoted)

Driver Brand	PHILIPS	Driver Model	929002819480
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 32-42Vdc
Dimming / Flicker	Non / Free	Certification	CE/ENEC/CCC
Power Factor	>0.9	Warranty	2 years

Technical character

Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP44
Tilt / Rotate	0~30° / Non
Operating temperature	0~35°C
Average Failure Time	L70(9k)>50000(h)


Materials

Luminaire	Aluminum die cast
Trim	Aluminum die cast
Optics	PMMA Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	Aluminum die cast
Baffle Color available	white / black

Accessories



Photometric

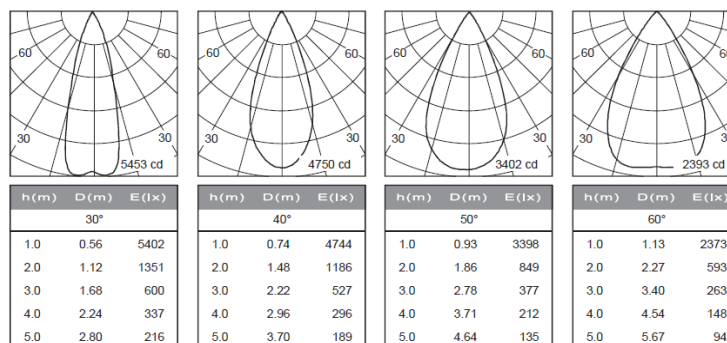

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.