




EPIC-110-RTLW1



Product specification

INTERIOR RECESSED DOWNLIGHTS



Cut out :

Technical Specification

Article number	2018.276F-LEA-15
LED Consumption	17W
Fixture Consumption	21W
Current / Voltage	500mA / 34Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	2004lm
Delivered Lumen	1109lm
Beam Angle available	Wallwash (Lens)


Driver Technical Specification (Remoted)

Driver Brand	EUCHIPS	Driver Model	PUP20A-1WMC
Input voltage / Frequency range	100-240Vac / 50/60Hz	Output Current / Voltage	500mA / 9-40Vdc
Dimming / Flicker	0/1-10V / Free	Certification	UL
Power Factor	>0.9	Warranty	-

Technical character		Materials	
Products Standard	UL1598	Luminaire	Aluminum die cast
		Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Wet Location	Heat sink	Forged aluminum
Tilt / Rotate	Non / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(10k) >55000(h)	Baffle Color available	white / black

Accessories

Photometric



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.75	1402
2.0	1.51	350
3.0	2.26	155
4.0	3.01	87
5.0	3.77	56

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.


INSTALLATION OPTIONS




ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC
 for EPIC110-3.5" (21W)
 Type: Gear box

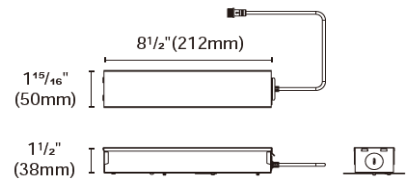


Internal space dimension:
 L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 9/16" (33mm)

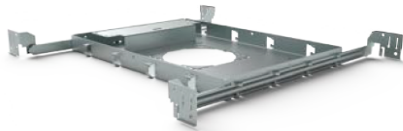


ACCH-12H-100 for EPIC110-3.5"
 Type: New construction plate



ACCH-12B-100-PUP20A-1WMC 0/1-10V
ACCH-12B-100-PUP20D-1WMC DALI
ACCH-12B-100-PUP20T-1LMC TRIAC
 for EPIC110-3.5" (21W)
 Type: IC Box



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

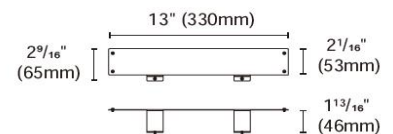

ACCI-5
 Type: Remodel stand

