






## EPIC-135-STF

## Product specification

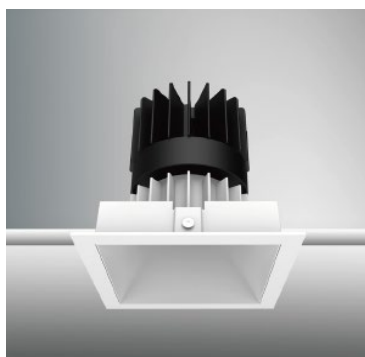

## INTERIOR RECESSED DOWNLIGHTS



## Technical Specification

|                         |                  |        |        |
|-------------------------|------------------|--------|--------|
| Article number          | 2018.466-ACOT-73 |        |        |
| LED Consumption         | 32W              |        |        |
| Fixture Consumption     | 36W              |        |        |
| Current / Voltage       | 900mA / 34.6Vdc  |        |        |
| CRI                     | 90+              |        |        |
| CCT                     | 2700K            | 3000K  | 4000K  |
| LED Lumen <sup>*1</sup> | 3526lm           | 3667lm | 3722lm |
| Delivered Lumen         | -                | 3170lm | -      |
| Beam Angle available    | 20°/30°/45°/55°  |        |        |

## Driver Technical Specification (Remoted)


|                                 |                      |                          |                  |
|---------------------------------|----------------------|--------------------------|------------------|
| Driver Brand                    | PHILIPS              | Driver Model             | 929002809106     |
| Input voltage / Frequency range | 220-240Vac / 50/60Hz | Output Current / Voltage | 900mA / 30-42Vdc |
| Dimming / Flicker               | Non / Low frequency  | Certification            | ENEC/CCC/CE      |
| Power Factor                    | >0.9                 | Warranty                 | 5 years          |

## Technical character


|                       |                   |                         |                   |
|-----------------------|-------------------|-------------------------|-------------------|
| Products Standard     | IEC 60598-1       | Luminaire               | Aluminum die cast |
|                       | IEC 62031         | Trim                    | Aluminum die cast |
| Insulation            | CLASS II          | Optics                  | PMMA Lens         |
| Protection            | IP44              | Heat sink               | Forged aluminum   |
| Tilt / Rotate         | Non / Non         | Fixture color available | white / black     |
| Operating temperature | 0~35°C            | Baffle                  | Aluminum die cast |
| Average Failure Time  | L70(9k) >50000(h) | Baffle Color available  | white / black     |

## Materials

## Accessories

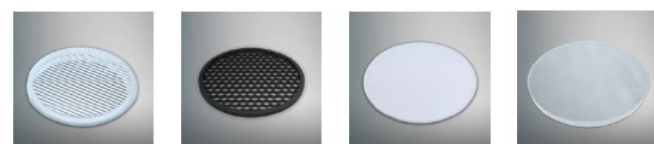ACSG-1  
Striped glassACHO-2  
Honeycomb louverACDS-6  
Diffusion sheetACWG-1  
Woven glassACOT-109  
Suction cup

## Photometric

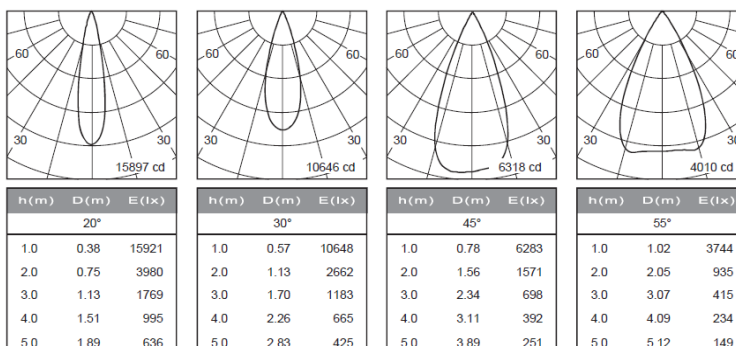

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.