
WRISE

NET-II-40-RSP



Product specification

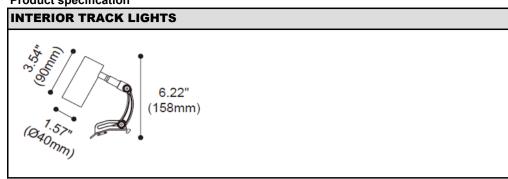

Technical Specification					
Article number	2019.203	2019.203			
LED Consumption	6.4W	6.4W			
Fixture Consumption	-				
Current / Voltage	350mA / 18.2	350mA / 18.2Vdc			
CRI	90+	90+			
сст	2700K	3000K	4000K		
LED Lumen *1	618lm	656lm	716lm		
Delivered Lumen	-	-	-		
Beam Angle available	18°/23°/35°	18°/23°/35°			
Driver Technical Specification (Remoted)					
Driver Brand -	Driver Mode	I	-		
Input voltage / Freqency range -	Output Curr	Output Current / Voltage			
Dimming / Flicker -	Certification	Certification -			
Power Factor -	Warranty	Warranty -			

Technical character		Materials		
Products Standard	IEC 60598-1	Luminaire	extruded aluminum	
	IEC 62031	Lummane	aluminum	
Insulation	CLASS II	Optics	PC Lens	
Protection	IP20	Heat sink	extruded aluminum	
Tilt / Rotate	0~200° / 0~130°	Fixture color available	white / black	
Operating temperature	0~35°C	Baffle	PC	
Average Failure Time	L70(10k)50000(h)	Baffle Color available	white / black	

Accessories Photometric

Remarks

