




GRAEAE-II-70-RSP-L

Product specification



INTERIOR TRACK LIGHTS

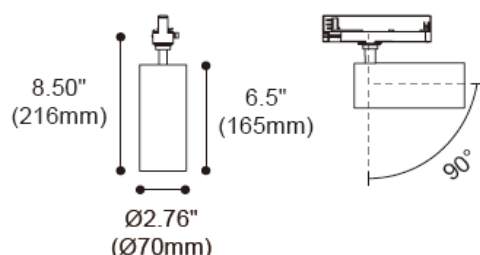

Technical Specification

Article number	2019.209		
LED Consumption	38W		
Fixture Consumption	-		
Current / Voltage	1050mA / 36Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	4092lm	4339lm	4737lm
Delivered Lumen	-	-	-
Beam Angle available	18°/23°/36°		

Driver Technical Specification (Built-in)

Driver Brand	POWERGEAR	Driver Model	PRO-UA440-B
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	1050mA / 27-40Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE/CQC
Power Factor	>0.9	Warranty	5years

Technical character

Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP20
Tilt / Rotate	0~90° / 0~355°
Operating temperature	0~35°C
Average Failure Time	L80(10k)>55400(h)

Materials

Luminaire	Extruded aluminum
Trim	-
Optics	PMMA Lens
Heat sink	Extruded aluminum
Fixture color available	white / black
Baffle	PC
Baffle Color available	white / black / copper

Accessories

Photometric

ACSG-7
striped glassACHO-10
Honeycomb louverACWG-8
Woven glassACSN-10
Long snoot

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.