




GRAEAE-II-70-RSP-L



Product specification

INTERIOR TRACK LIGHTS

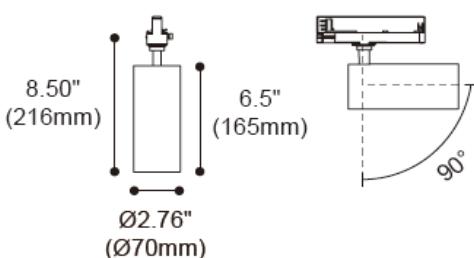

Technical Specification

Article number	2019.209		
LED Consumption	35.8W		
Fixture Consumption	-		
Current / Voltage	1050mA / 36Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen *1	4206lm	4383lm	4448lm
Delivered Lumen	3096lm	3226lm	3274lm
Beam Angle available	18°/23°/36°		

Driver Technical Specification (Built-in)

Driver Brand	POWERGEAR	Driver Model	PRO-UA440-B
Input voltage / Freqency range	220-240Vac / 50/60Hz	Output Current / Voltage	1050mA / 27-40Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE/CQC
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Forged aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP20	Heat sink	Forged aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(10k)>50000(h)	Baffle Color available	white / black / copper

Accessories

ACSG-7
striped glassACHO-10
Honeycomb louverACWG-8
Woven glassACSN-10
Long snoot

Photometric



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.