

KANO SERIES (EU)



KANO (EU)

KANO is designed to improve the concept of downlight with high power LED and low glare baffle design. Therefore, it provides comfort, circular and anti glare distribution. Overall appearance shows neat and elegant for interior area. In other words, KANO is able to use as primary or decorative illumination for widely applications; such as office, restaurant, hotel, highend store, residential housing and so on.

Shape



1T




2T




4T



5T



10T



15T



Linear

Mountings



Recessed
Trim



Recessed
Trimless



Surface
Mounted



Track

Light distributions



Downlight



Adjustable



Wallwash


KANO recessed downlights
fixed / adjustable / wallwash




Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90
IP20

Types



fixed		1T/2T/4T/5T/10T/15T
adjustable		5T/10T/15T
wallwash		5T/10T/15T

Colours

 Black
  White

Baffle :  Black

Custom baffle colour
  White
  Gold
  Chrome
  Rosegold

(MOQ is required for custom colours)

Beam Angle






15°/30°/40° (Reflector)



Wallwash



Light engine installation










KANO-II-1-TF



Article number	1814.400-1
LED Consumption	2.2W (2.2W X1)
Current	700 (mA)
Delivered Lumen	150 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

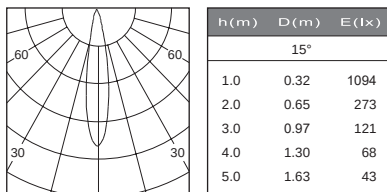




KANO-II-2-TF



Article number	1814.400-2
LED Consumption	4.4W (2.2W X2)
Current	700 (mA)
Delivered Lumen	315 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

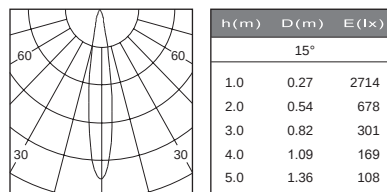

KANO-II-4-TF






Article number	1814.413
LED Consumption	8.8W (2.2W X4)
Current	700 (mA)
Delivered Lumen	591 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

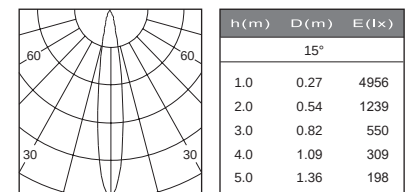

KANO-III-5-TF






Article number	1914.412-5
LED Consumption	11W (2.2W X5)
Current	700 (mA)
Delivered Lumen	743 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.412-5-WCW
LED Consumption	11W (2.2W X5)
Current	350 (mA)
Delivered Lumen(WW)	447 (lm)
Delivered Lumen(CW)	550 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+

Colours :  
Black White



Dimmable

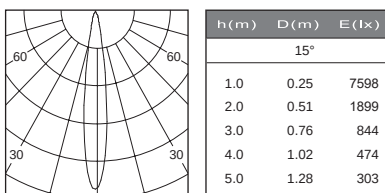

KANO-III-10-TF






Article number	1914.412-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	1459 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.412-10-WCW
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen(WW)	447 (lm) X2
Delivered Lumen(CW)	550 (lm) X2
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+

Colours :  
Black White



Dimmable

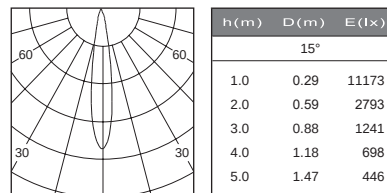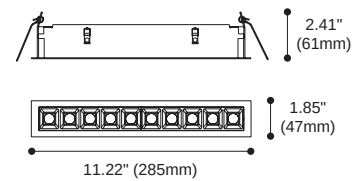

KANO-III-15-TF






Article number	1914.412-15
LED Consumption	33W (2.2W X15)
Current	700 (mA)
Delivered Lumen	2313 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.412-15-WCW
LED Consumption	33W (2.2W X15)
Current	1050 (mA)
Delivered Lumen(WW)	447 (lm) X3
Delivered Lumen(CW)	550 (lm) X3
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+

Colours :  
Black White






Dimmable

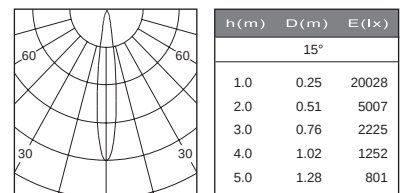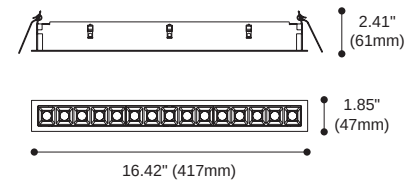

KANO-II-1-TLF






Article number	1814.402-1
LED Consumption	2.2W (2.2W X1)
Current	700 (mA)
Delivered Lumen	150 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

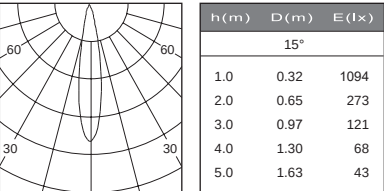


KANO-II-2-TLF



Article number	1814.402-2
LED Consumption	4.4W (2.2W X2)
Current	700 (mA)
Delivered Lumen	315 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

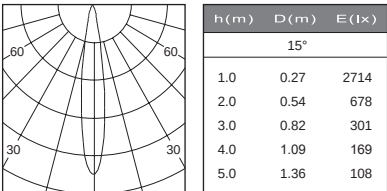




KANO-II-4-TLF

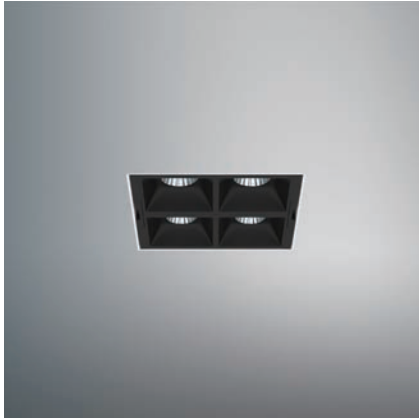

Article number	1814.402-4
LED Consumption	8.8W (2.2W X4)
Current	700 (mA)
Delivered Lumen	591 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+



Dimmable

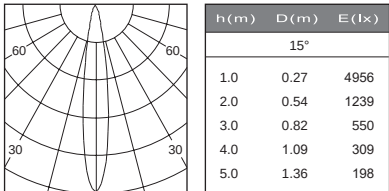




KANO-II-5-TLF



Article number	1814.402-5
LED Consumption	11W (2.2W X5)
Current	700 (mA)
Delivered Lumen	743 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1814.402-5-WCW
LED Consumption	11W (2.2W X5)
Current	350 (mA)
Delivered Lumen(WW)	447 (lm)
Delivered Lumen(CW)	550 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+



Dimmable

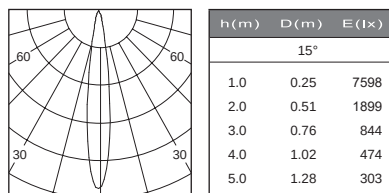




KANO-II-10-TLF



Article number	1814.402-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	1459 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1814.402-10-WCW
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen(WW)	447 (lm) X2
Delivered Lumen(CW)	550 (lm) X2
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+



Dimmable

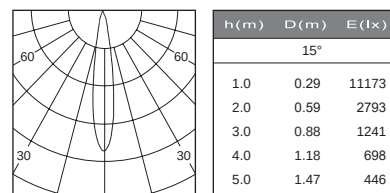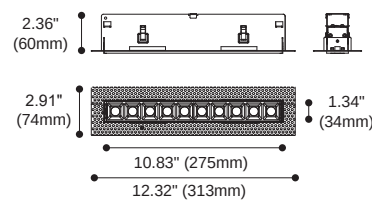




KANO-II-15-TLF



Article number	1814.402-15
LED Consumption	33W (2.2W X15)
Current	700 (mA)
Delivered Lumen	2313 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1814.402-15-WCW
LED Consumption	33W (2.2W X15)
Current	1050 (mA)
Delivered Lumen(WW)	447 (lm) X3
Delivered Lumen(CW)	550 (lm) X3
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+



Dimmable

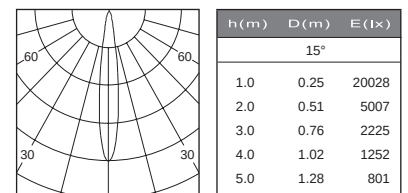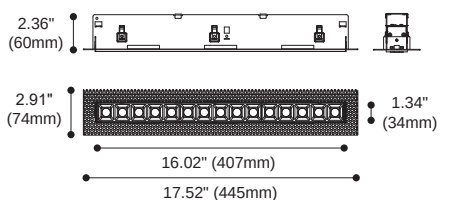

KANO-III-5-TA






Article number	1914.413-5
LED Consumption	11W (2.2W X5)
Current	700 (mA)
Delivered Lumen	770 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.413-5-WCW
LED Consumption	11W (2.2W X5)
Current	350 (mA)
Delivered Lumen(WW)	447 (lm)
Delivered Lumen(CW)	550 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+

Colours :  
Black White



Dimmable



h (m)	D (m)	E (lx)
15°		
1.0	0.25	7253
2.0	0.51	1813
3.0	0.77	805
4.0	1.03	453
5.0	1.29	290

KANO-III-10-TA






Article number	1914.413-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	1540 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.413-10-WCW
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen(WW)	447 (lm) X2
Delivered Lumen(CW)	550 (lm) X2
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+

Colours :  
Black White



Dimmable

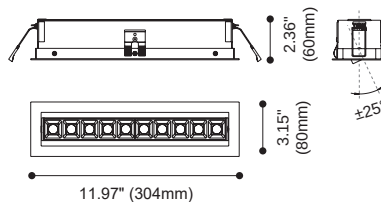

h (m)	D (m)	E (lx)
15°		
1.0	0.26	13320
2.0	0.53	3330
3.0	0.80	1480
4.0	1.07	832
5.0	1.34	532

KANO-III-15-TA






Article number	1914.413-15
LED Consumption	33W (2.2W X15)
Current	700 (mA)
Delivered Lumen	2313 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.413-15-WCW
LED Consumption	33W (2.2W X15)
Current	1050 (mA)
Delivered Lumen(WW)	447 (lm) X3
Delivered Lumen(CW)	550 (lm) X3
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+

Colours :  
Black White



Dimmable

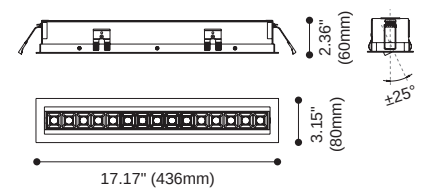

h (m)	D (m)	E (lx)
15°		
1.0	0.26	20159
2.0	0.52	5040
3.0	0.78	2240
4.0	1.04	1260
5.0	1.30	806

KANO-III-5-TLA



Article number	1914.416-5
LED Consumption	11W (2.2W X5)
Current	700 (mA)
Delivered Lumen	770 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.416-5-WCW
LED Consumption	11W (2.2W X5)
Current	350 (mA)
Delivered Lumen(WW)	447 (lm)
Delivered Lumen(CW)	550 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+

KANO-III-10-TLA



Article number	1914.416-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	1540 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.416-10-WCW
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen(WW)	447 (lm) X2
Delivered Lumen(CW)	550 (lm) X2
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+




KANO-III-15-TLA



Article number	1914.416-15
LED Consumption	33W (2.2W X15)
Current	700 (mA)
Delivered Lumen	2313 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+
Tunable White Article number	1914.416-15-WCW
LED Consumption	33W (2.2W X15)
Current	1050 (mA)
Delivered Lumen(WW)	447 (lm) X3
Delivered Lumen(CW)	550 (lm) X3
Beam Angle	15°/30°/40° (Reflector)
CCT	2700-6000K
CRI	90+






Dimmable

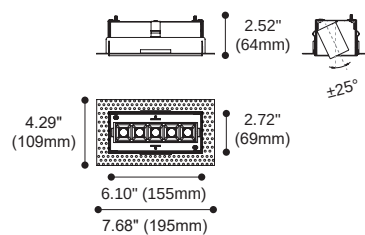

h (m)	D (m)	E (lx)
	15°	
1.0	0.25	7253
2.0	0.51	1813
3.0	0.77	805
4.0	1.03	453
5.0	1.29	290






Dimmable

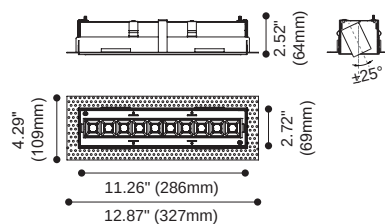

h (m)	D (m)	E (lx)
	15°	
1.0	0.26	13320
2.0	0.53	3330
3.0	0.80	1480
4.0	1.07	832
5.0	1.34	532



Dimmable

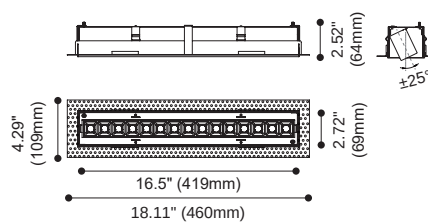

h (m)	D (m)	E (lx)
	15°	
1.0	0.26	20159
2.0	0.52	5040
3.0	0.78	2240
4.0	1.04	1260
5.0	1.30	806

KANO-III-5-TW






Article number	1914.414-5
LED Consumption	11W (2.2W X5)
Current	700 (mA)
Delivered Lumen	462 (lm)
Beam Angle	Wallwash
CCT	3000K
CRI	90+
Tunable White Article number	1914.414-5-WCW
LED Consumption	11W (2.2W X5)
Current	350 (mA)
Delivered Lumen(WW)	277 (lm)
Delivered Lumen(CW)	341 (lm)
Beam Angle	Wallwash
CCT	2700-6000K
CRI	90+

Colours :  
Black White



Dimmable



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.33	268
2.0	2.67	67
3.0	4.00	29
4.0	5.34	16
5.0	6.68	10

KANO-III-10-TW






Article number	1914.414-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	462 (lm) X2
Beam Angle	Wallwash
CCT	3000K
CRI	90+
Tunable White Article number	1914.414-10-WCW
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen(WW)	277 (lm) X2
Delivered Lumen(CW)	341 (lm) X2
Beam Angle	Wallwash
CCT	2700-6000K
CRI	90+

Colours :  
Black White



Dimmable

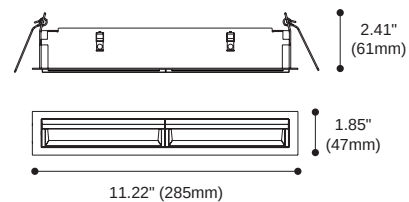

h(m)	D(m)	E(lx)
Wallwash		
1.0	1.40	527
2.0	2.80	131
3.0	4.20	58
4.0	5.61	32
5.0	7.01	21

KANO-II-5-TLW



Article number	1814.411-5
LED Consumption	11W (2.2W X5)
Current	700 (mA)
Delivered Lumen	462 (lm)
Beam Angle	Wallwash
CCT	3000K
CRI	90+
Tunable White Article number	1814.411-5-WCW
LED Consumption	11W (2.2W X5)
Current	350 (mA)
Delivered Lumen(WW)	277 (lm)
Delivered Lumen(CW)	341 (lm)
Beam Angle	Wallwash
CCT	2700-6000K
CRI	90+




KANO-II-10-TLW



Article number	1814.411-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	462 (lm) X2
Beam Angle	Wallwash
CCT	3000K
CRI	90+
Tunable White Article number	1814.411-10-WCW
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen(WW)	277 (lm) X2
Delivered Lumen(CW)	341 (lm) X2
Beam Angle	Wallwash
CCT	2700-6000K
CRI	90+






Dimmable



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.33	268
2.0	2.67	67
3.0	4.00	29
4.0	5.34	16
5.0	6.68	10




Dimmable

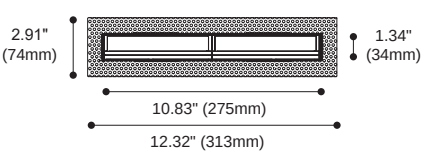

h(m)	D(m)	E(lx)
Wallwash		
1.0	1.40	527
2.0	2.80	131
3.0	4.20	58
4.0	5.61	32
5.0	7.01	21


KANO surface mounted
fixed

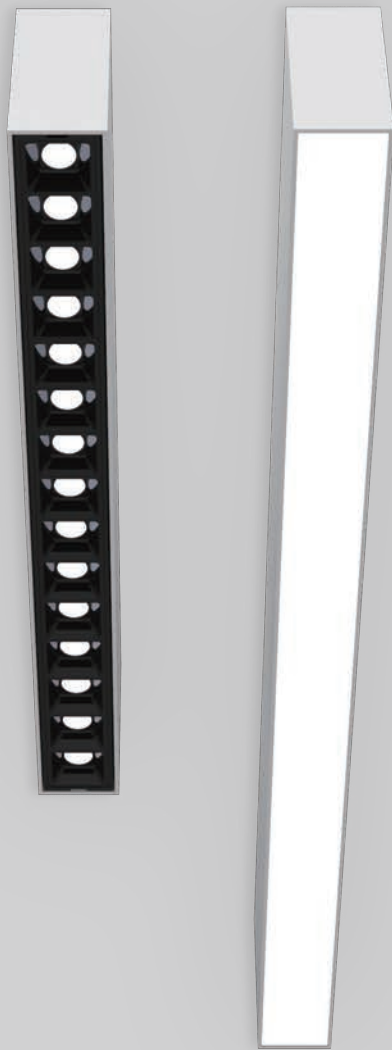

Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90
IP20

Types

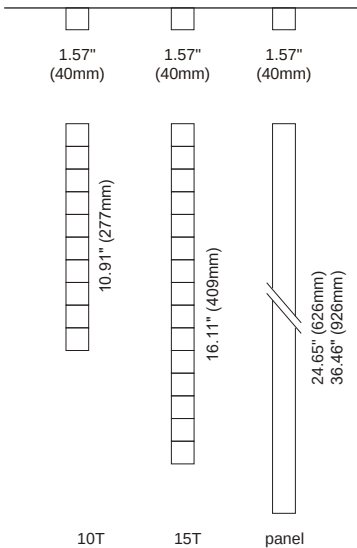

Colours

- Black White
- Baffle : Black
- Custom baffle colour
- White Gold Chrome Rosegold
- (MOQ is required for custom colours)

Beam Angle

- 15°/30°/40° (Reflector)
- 115°

For 2013.169 & 2013.170

Fixture Installation :



Fixture Maintenance :





KANO-II-10-SF





Article number	2013.169-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	1459 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable



h(m)	D(m)	E(lx)
15°		
1.0	0.29	11173
2.0	0.59	2793
3.0	0.88	1241
4.0	1.18	698
5.0	1.47	446

KANO-II-15-SF





Article number	2013.169-15
LED Consumption	33W (2.2W X15)
Current	700 (mA)
Delivered Lumen	2313 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

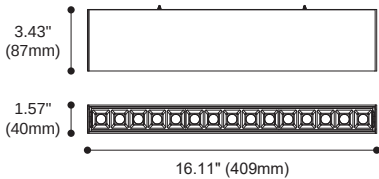

h(m)	D(m)	E(lx)
15°		
1.0	0.25	20028
2.0	0.51	5007
3.0	0.76	2225
4.0	1.02	1252
5.0	1.28	801

KANO-II-P6-SF




Article number	2013.170A
LED Consumption	18W
Current	500 (mA)
Delivered Lumen	1197 (lm)
Beam Angle	115°
CCT	3000K
CRI	80+


Colours :  
Black White



Dimmable



Driver Built-in

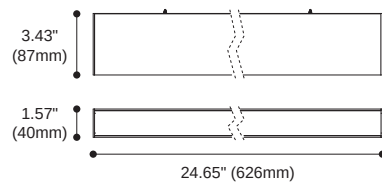

KANO-II-P9-SF




Article number	2013.170B
LED Consumption	25W
Current	700 (mA)
Delivered Lumen	1500 (lm)
Beam Angle	115°
CCT	3000K
CRI	80+


Colours :  
Black White



Dimmable



Driver Built-in

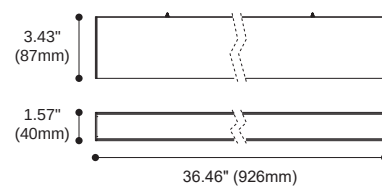


KANO track lights

adjustable

Specification

2700 K, 3000 K, 4000 K,
CRI $\geq$ 90
IP20

Types

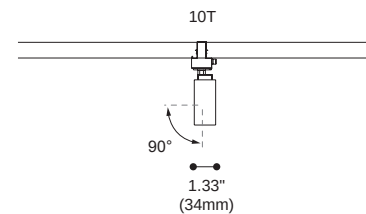


Colours



Baffle : Black

Custom baffle colour



Beam Angle



15°/30°/40° (Reflector)





Article number	1819.235-10
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Delivered Lumen	1459 (lm)
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White



Driver Built-in

