

BROWNIE ONE SERIES_(EU)



BROWNIE ONE (EU)

BROWNIE ONE is a versatile, elegant and slim office luminaire. It is available in two widths and three different mounting options, recessed, surface-mounted, and suspended. Up to four different lengths are available to form a continuous row of lights, as well as a system or as individual luminaires.

The series is designed as a lighting solution for upscale offices and commercial interiors. They ensure uniform illumination and provide pleasing ceiling lighting, creating a friendly working environment.

Shape



Linear
40



Linear
60

Mountings



Recessed
Trim



Recessed
Trimless



Surface
Mounted




Pendant

Light distributions



Downlight

BROWNIE ONE **40/60** (EU)

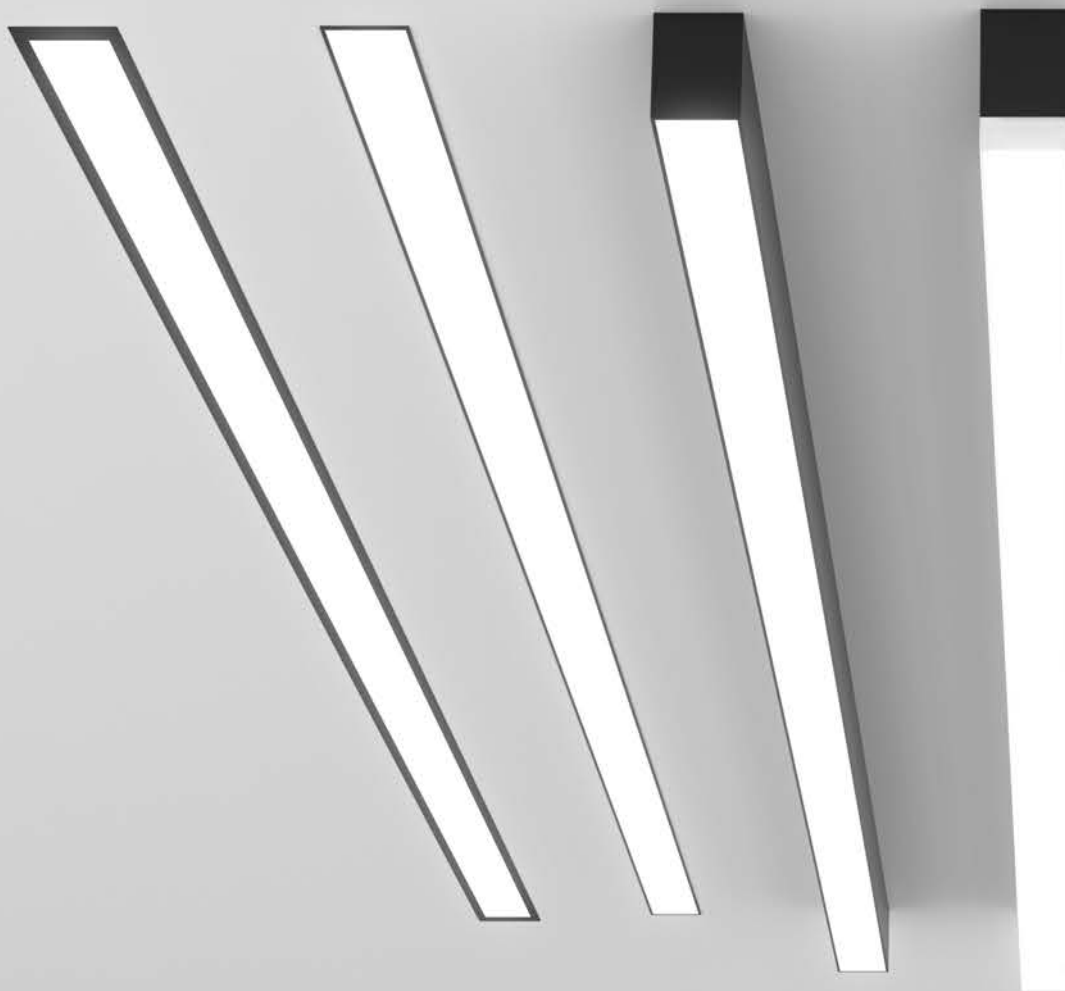



Specification

2700 K, 3000 K, 4000 K,
CRI ≥ 90

Types


Recessed		
Trim		
Trimless	40	60




A: 23.15"(588mm)
B: 45.43"(1154mm)
C: 67.72"(1720mm)
D: 90"(2286mm)



A: 23.15"(588mm)
B: 45.43"(1154mm)
C: 67.72"(1720mm)
D: 90"(2286mm)



A: 22.44"(570mm)
B: 44.72" (1136mm)
C: 67"(1702mm)
D: 89.29"(2268mm)



A: 22.44"(570mm)
B: 44.72" (1136mm)
C: 67"(1702mm)
D: 89.29"(2268mm)



	40	60
Surface		
Mounted	3.43" (87mm)	3.43" (80mm)



4.12"
(107mm)



3.93"
(100mm)

	40/60	
Pendant		
	A: 22.44"(570mm) B: 44.72" (1136mm) C: 67"(1702mm) D: 89.29"(2268mm)	

Colours

Bezel :  
Black White







BROWNIE ONE **40/60** (EU)

Recessed

Trim/Trimless

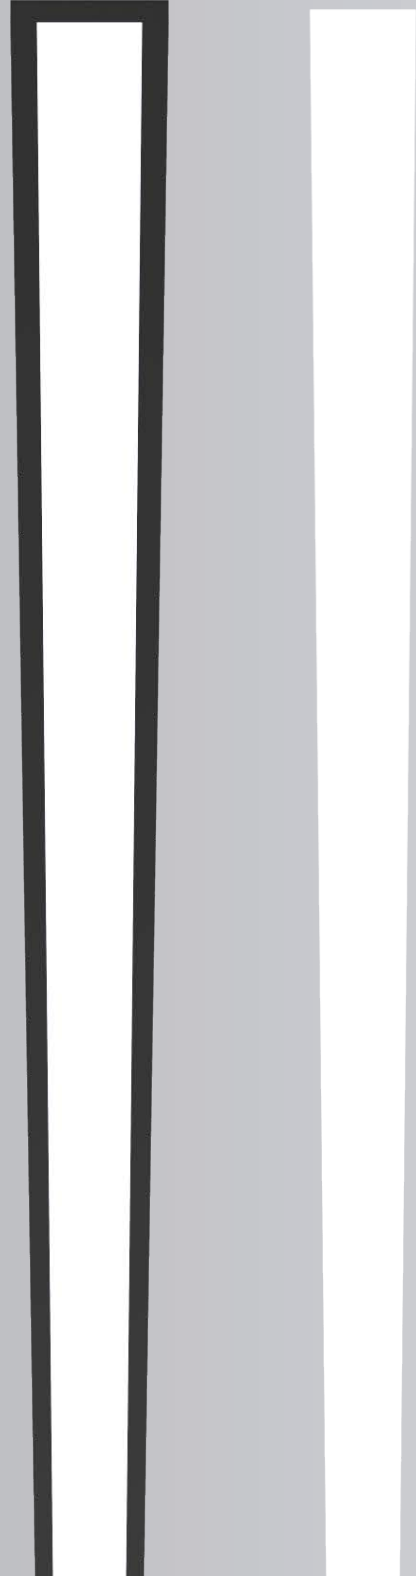

BROWNIE ONE 40-TFP

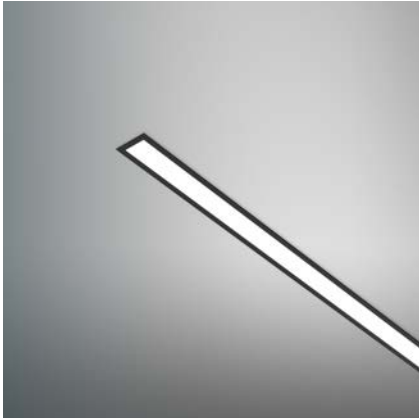



Article number	2114.416A
	2114.416B
	2114.416C
	2114.416D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+

Bezel :  
Black White




Dimmable

1-10V

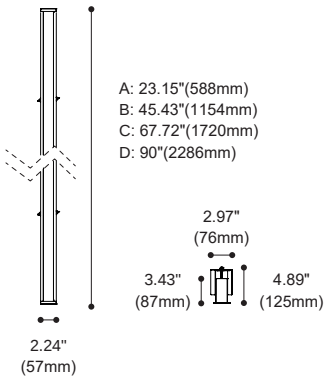

BROWNIE ONE 40-TLFP

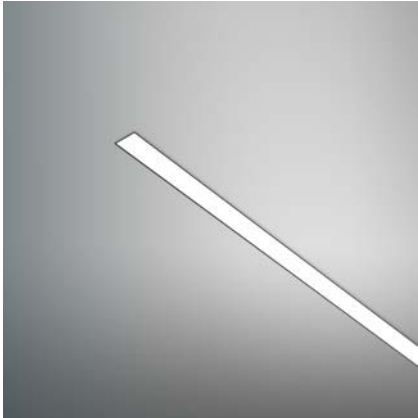



Article number	2114.516A
	2114.516B
	2114.516C
	2114.516D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+

Bezel :  
Black White




Dimmable

1-10V

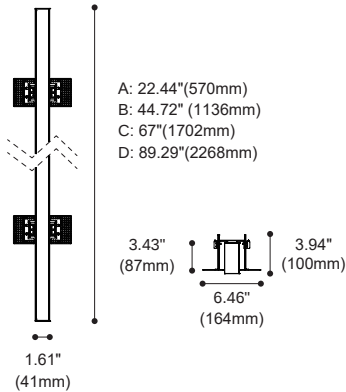

BROWNIE ONE 60-TFP


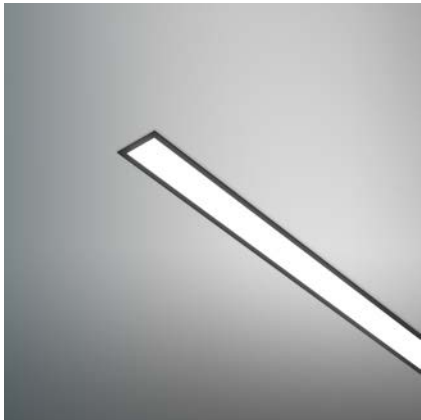


Article number	2114.417A 2114.417B 2114.417C 2114.417D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+


Bezel :  Black  White



Dimmable

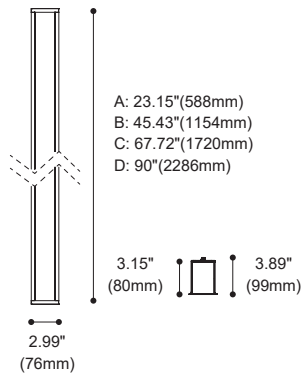

BROWNIE ONE 60-TLFP


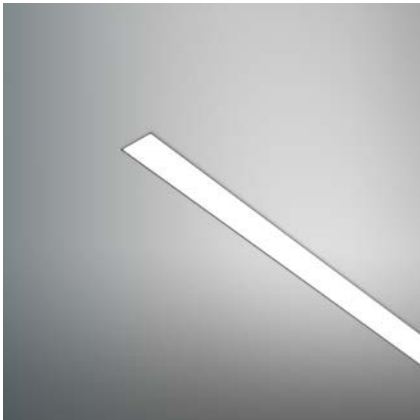


Article number	2114.517A 2114.517B 2114.517C 2114.517D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+

Bezel :  Black  White



Dimmable

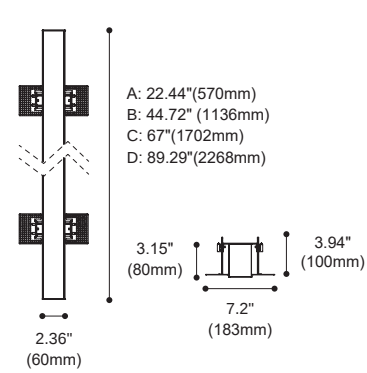






BROWNIE ONE **40/60** (EU)

Surface Mounted

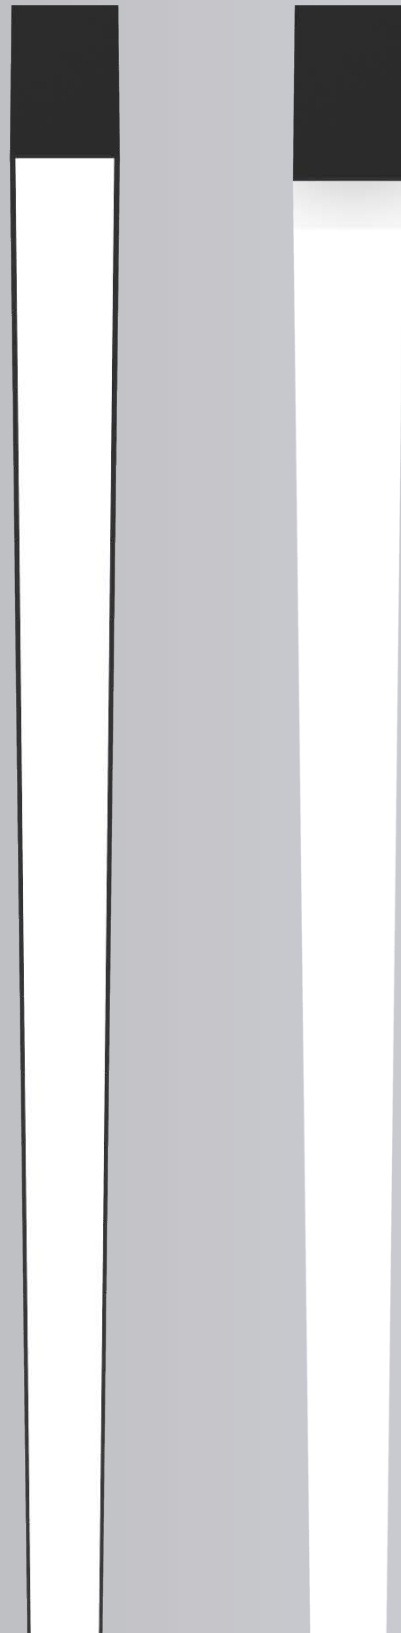


BROWNIE ONE 40-SF-1



Article number	2113.108A 2113.108B 2113.108C 2113.108D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+
Bezel :	  Black White



Dimmable

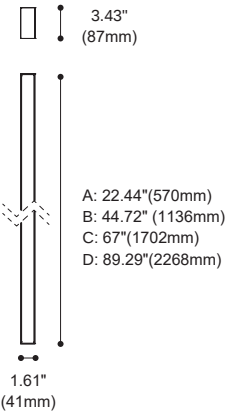


BROWNIE ONE 40-SF-2



Article number	2113.109A 2113.109B 2113.109C 2113.109D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+
Bezel :	  Black White



Dimmable

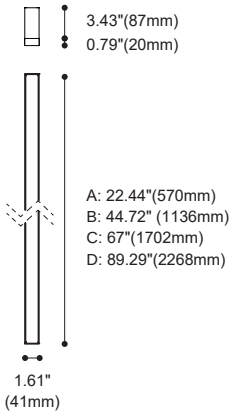


BROWNIE ONE 60-SF-1



Article number	2113.110A
	2113.110B
	2113.110C
	2113.110D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+
Bezel :	Black White



Dimmable

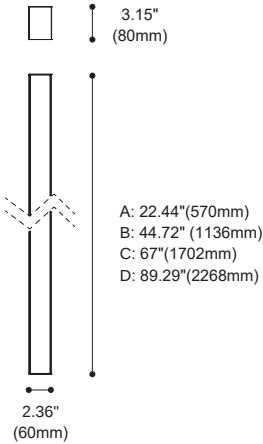


BROWNIE ONE 60-SF-2



Article number	2113.111A
	2113.111B
	2113.111C
	2113.111D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+
Bezel :	Black White



Dimmable

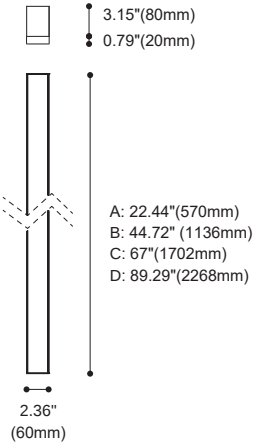






BROWNIE ONE **40/60** (EU)

Pendant

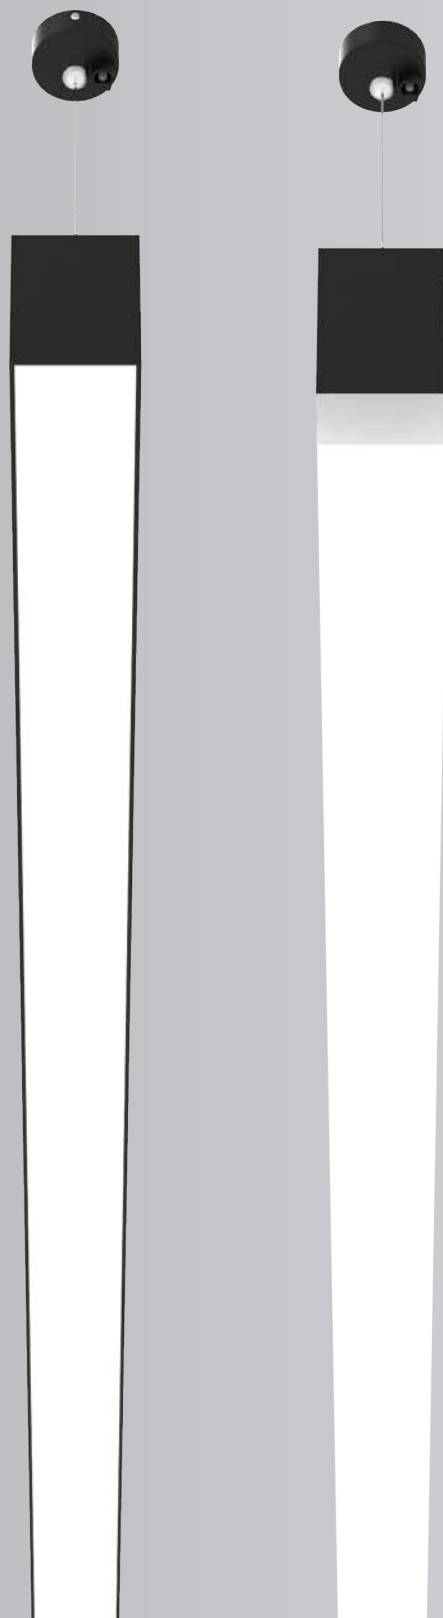

BROWNIE ONE 40-P-1




Article number	2116.110A
	2116.110B
	2116.110C
	2116.110D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

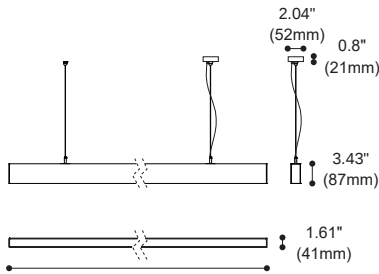

A: 22.44"(570mm)
B: 44.72" (1136mm)
C: 67"(1702mm)
D: 89.29"(2268mm)

BROWNIE ONE 40-P-2




Article number	2116.111A
	2116.111B
	2116.111C
	2116.111D
LED Consumption	9.4W / 19.8W / 29.2W / 39.6W
Voltage	120-277 VAC
Delivered Lumen	784 / 1568 (lm) 2352 / 3136 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

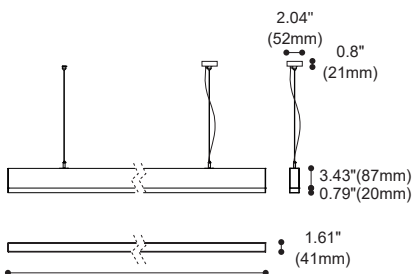

A: 22.44"(570mm)
B: 44.72" (1136mm)
C: 67"(1702mm)
D: 89.29"(2268mm)

BROWNIE ONE 60-P-1




Article number	2116.112A 2116.112B 2116.112C 2116.112D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	100°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

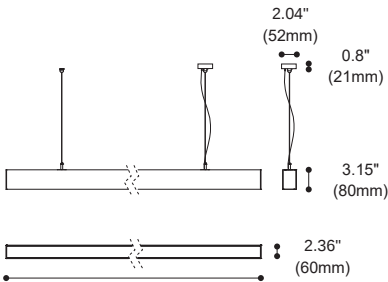

A: 22.44"(570mm)
B: 44.72" (1136mm)
C: 67"(1702mm)
D: 89.29"(2268mm)

BROWNIE ONE 60-P-2




Article number	2116.113A 2116.113B 2116.113C 2116.113D
Fixture Consumption	16W / 30.6W / 46.6W / 61.2W
Voltage	120-277 VAC
Delivered Lumen	948 / 1896 (lm) 2844 / 3792 (lm)
Beam Angle	110°
CCT	3000K
CRI	90+

Bezel :  
Black White



Dimmable

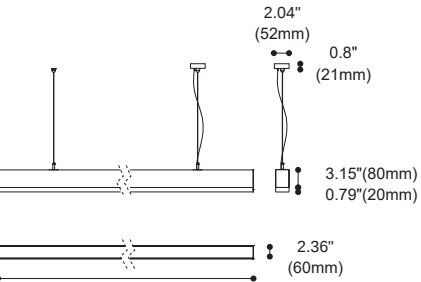

A: 22.44"(570mm)
B: 44.72" (1136mm)
C: 67"(1702mm)
D: 89.29"(2268mm)