


# SHELL-S SERIES (EU)




# SHELL-S (EU)

With the ingenious mechanics, optimized thermal management, and multiple free-form surface reflectors, SHELL brings a new picture to display lighting solutions. The wall wash system creates a glowing transition between wall and ceiling, and avoids stripes and shadows across the wall, offering a harmonious visual experience.

Shape



7T



14T



21T

Linear

Mountings



Recessed  
Trim

Light distributions



Wallwash

**SHELL-S 7T/14T/21T** recessed downlights  
fixed wallwash



**Specification**

2700 K, 3000 K, 4000 K,  
CRI ≥ 90  
SHELL-S 7T to 387 lm  
(3000 K) 14T to 757 lm  
21T to 1090 lm

1-10V

**Types**

Recessed  
Trim

A 7T

B 14T

C 21T

**Colours**

Colours :   
Black White

**Beam Angle**



Wallwash (Reflector)







# SHELL-S

## Wallwash

Thanks to asymmetric light distribution and high-performance optical elements, SHELL achieves to ensure the display effect is highlighted can produce a smooth wall gradient from top to bottom. The reflector integrates precise light control, high efficiency low glare and a comfortable visual experience can be precisely created.

2114.418B  
X lamp to wall  
Y lamp to lamp  
Z lamp to floor

X:Y:Z= 1 : 1 : 3 (M)

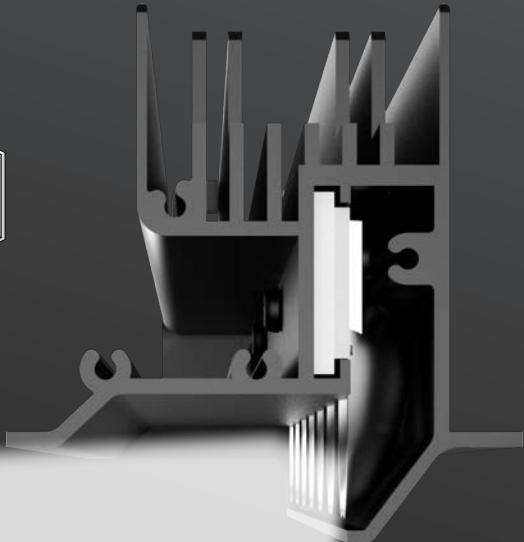








# SHELL-S

Wallwash  
Recessed

The material of the company's image wall highlights

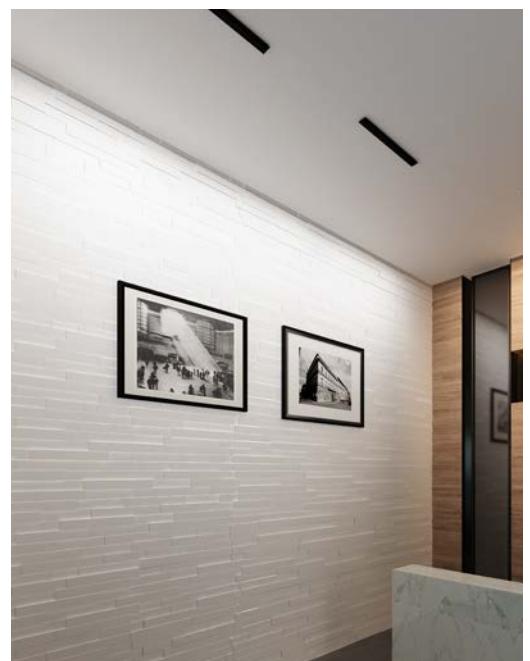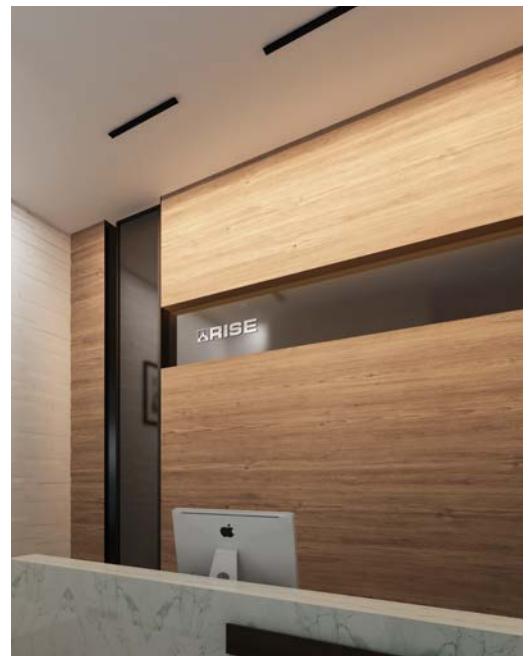

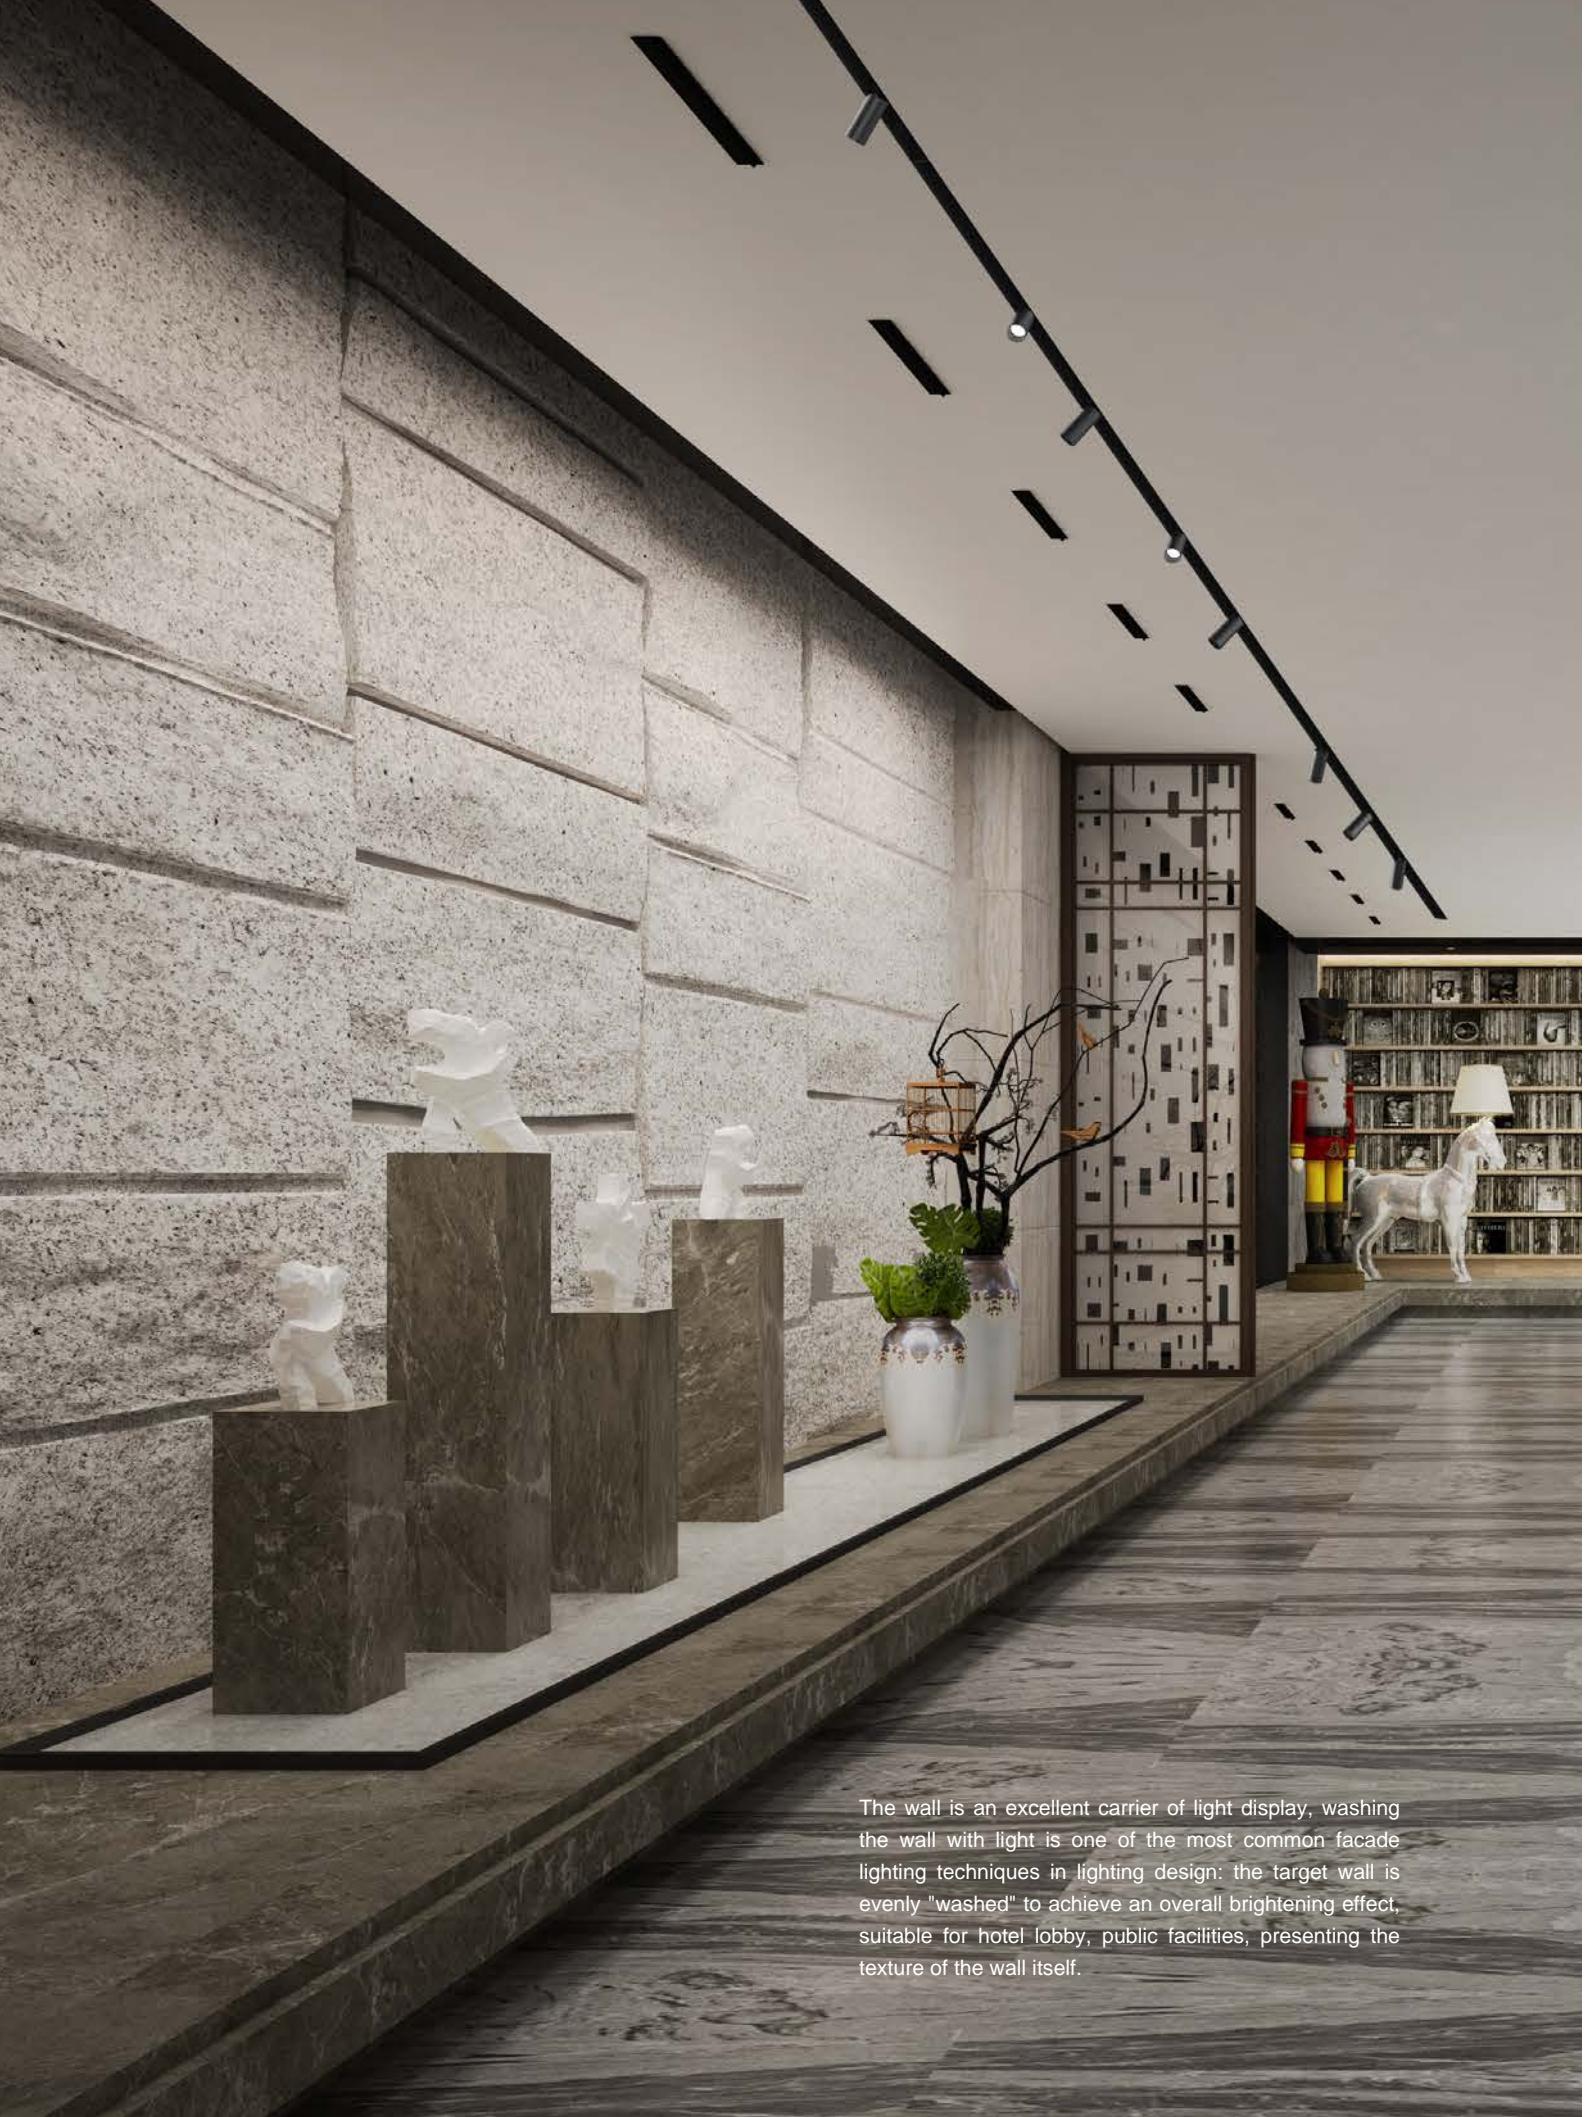

The wall is an excellent carrier of light display, washing the wall with light is one of the most common facade lighting techniques in lighting design: the target wall is evenly "washed" to achieve an overall brightening effect, suitable for hotel lobby, public facilities, presenting the texture of the wall itself.

SHELL-S-7-TW






Article number	2114.418A
LED Consumption	8W
Current	180 (mA)
Delivered Lumen	387 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :   
Black White



Dimmable



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.12	284
2.0	2.24	71
3.0	3.36	31
4.0	4.48	17
5.0	5.60	11

SHELL-S-14-TW






Article number	2114.418B
LED Consumption	15W
Current	350 (mA)
Delivered Lumen	757 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :   
Black White



Dimmable



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.08	569
2.0	2.15	142
3.0	3.23	63
4.0	4.31	35
5.0	5.38	22

SHELL-S-21-TW






Article number	2114.418C
LED Consumption	22W
Current	500 (mA)
Delivered Lumen	1090 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :   
Black White



Dimmable



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.02	847
2.0	2.04	211
3.0	3.06	94
4.0	4.09	52
5.0	5.11	33