


SHELL SERIES (EU)

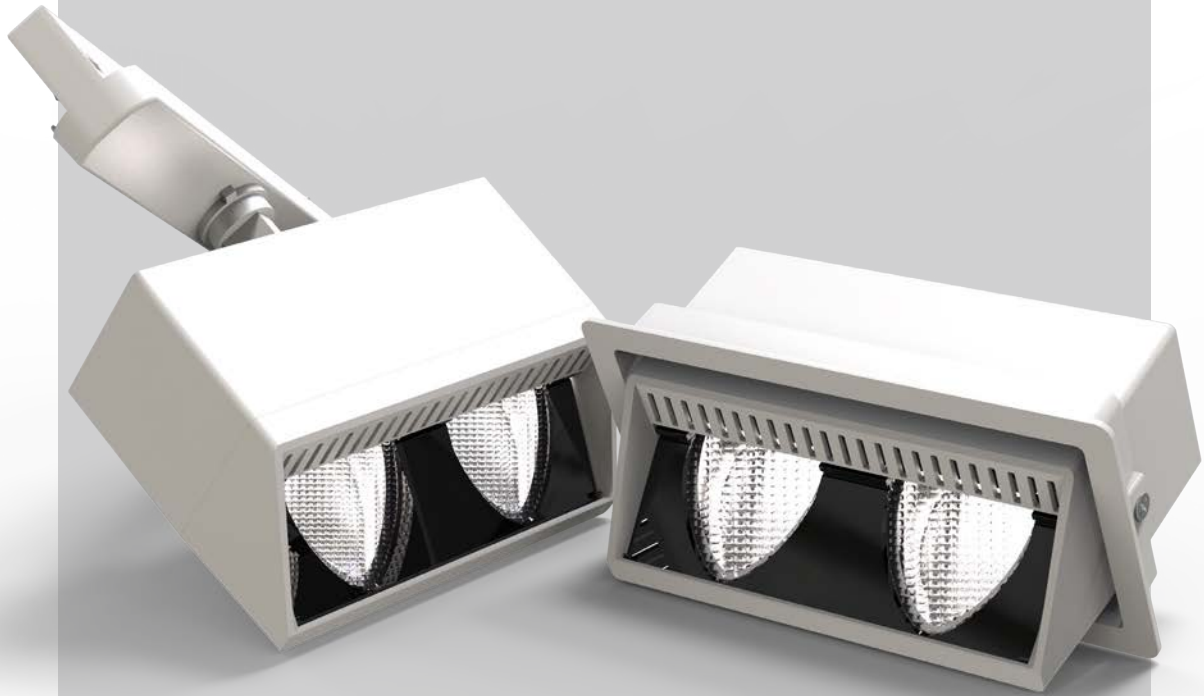

SHELL (EU)

With the ingenious mechanics, optimized thermal management, and multiple free-form surface reflectors, SHELL brings a new picture to display lighting solutions. The wall wash system creates a glowing transition between wall and ceiling, and avoids stripes and shadows across the wall, offering a harmonious visual experience.

Shape



Single-sided
2T

Mountings



Track



Recessed
Trim

Light distributions



Shelf
Floor




Wide
Wallwash



High ceiling
wallwash






The SHELL light is available in three variants with different beam characteristics to suit different space layouts and requirements. Perfect alignment ensures that as much light as possible is directed at the product with the minimum of luminaries. SHELL lights can be adapted to a variety of conditions and illuminated selectively without loss of light dispersion. As a result, all products are presented in an attractive manner, regardless of the size of the shop or the interior design.

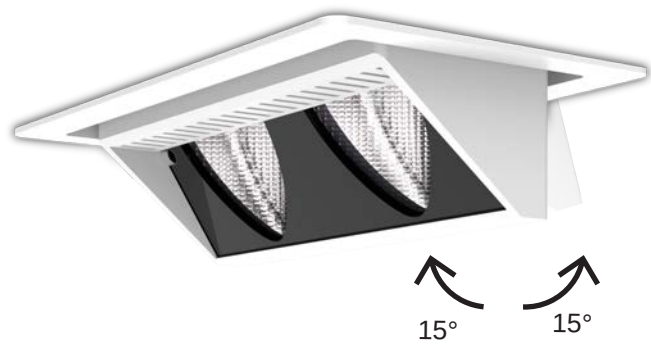

Shelf floor wallwash

Suggested height to ceiling:300cm
Distance between fixtures:150cm
Distance from wall:100cm

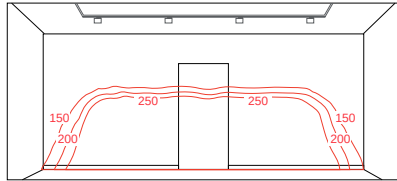




X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 1.5 : 2 m (Low)




High ceiling wallwash

Suggested height to ceiling:500cm
Distance between fixtures:1.20cm
Distance from wall:100cm

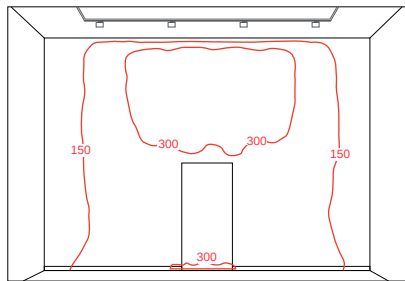



X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 1.2 : 5 m

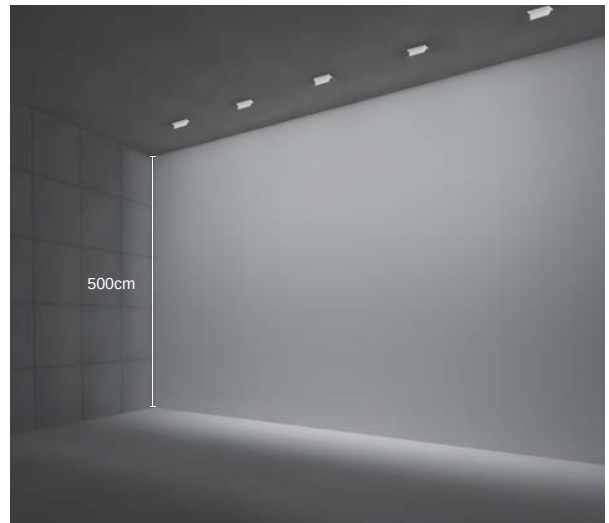


Wide wallwash

Suggested height to ceiling:300cm
Distance between fixtures:200cm
Distance from wall:100cm

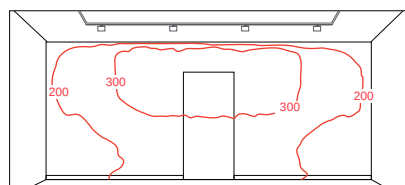


X lamp to wall
Y lamp to lamp
Z lamp to floor

X:Y:Z= 1 : 2 : 3 m

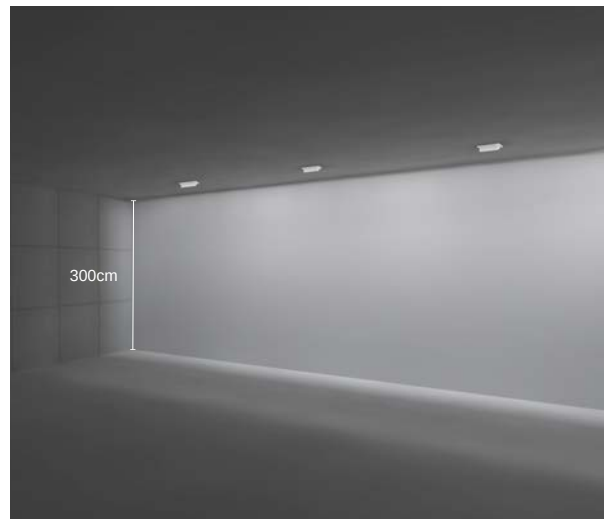


SHELL-T track lights
wallwash



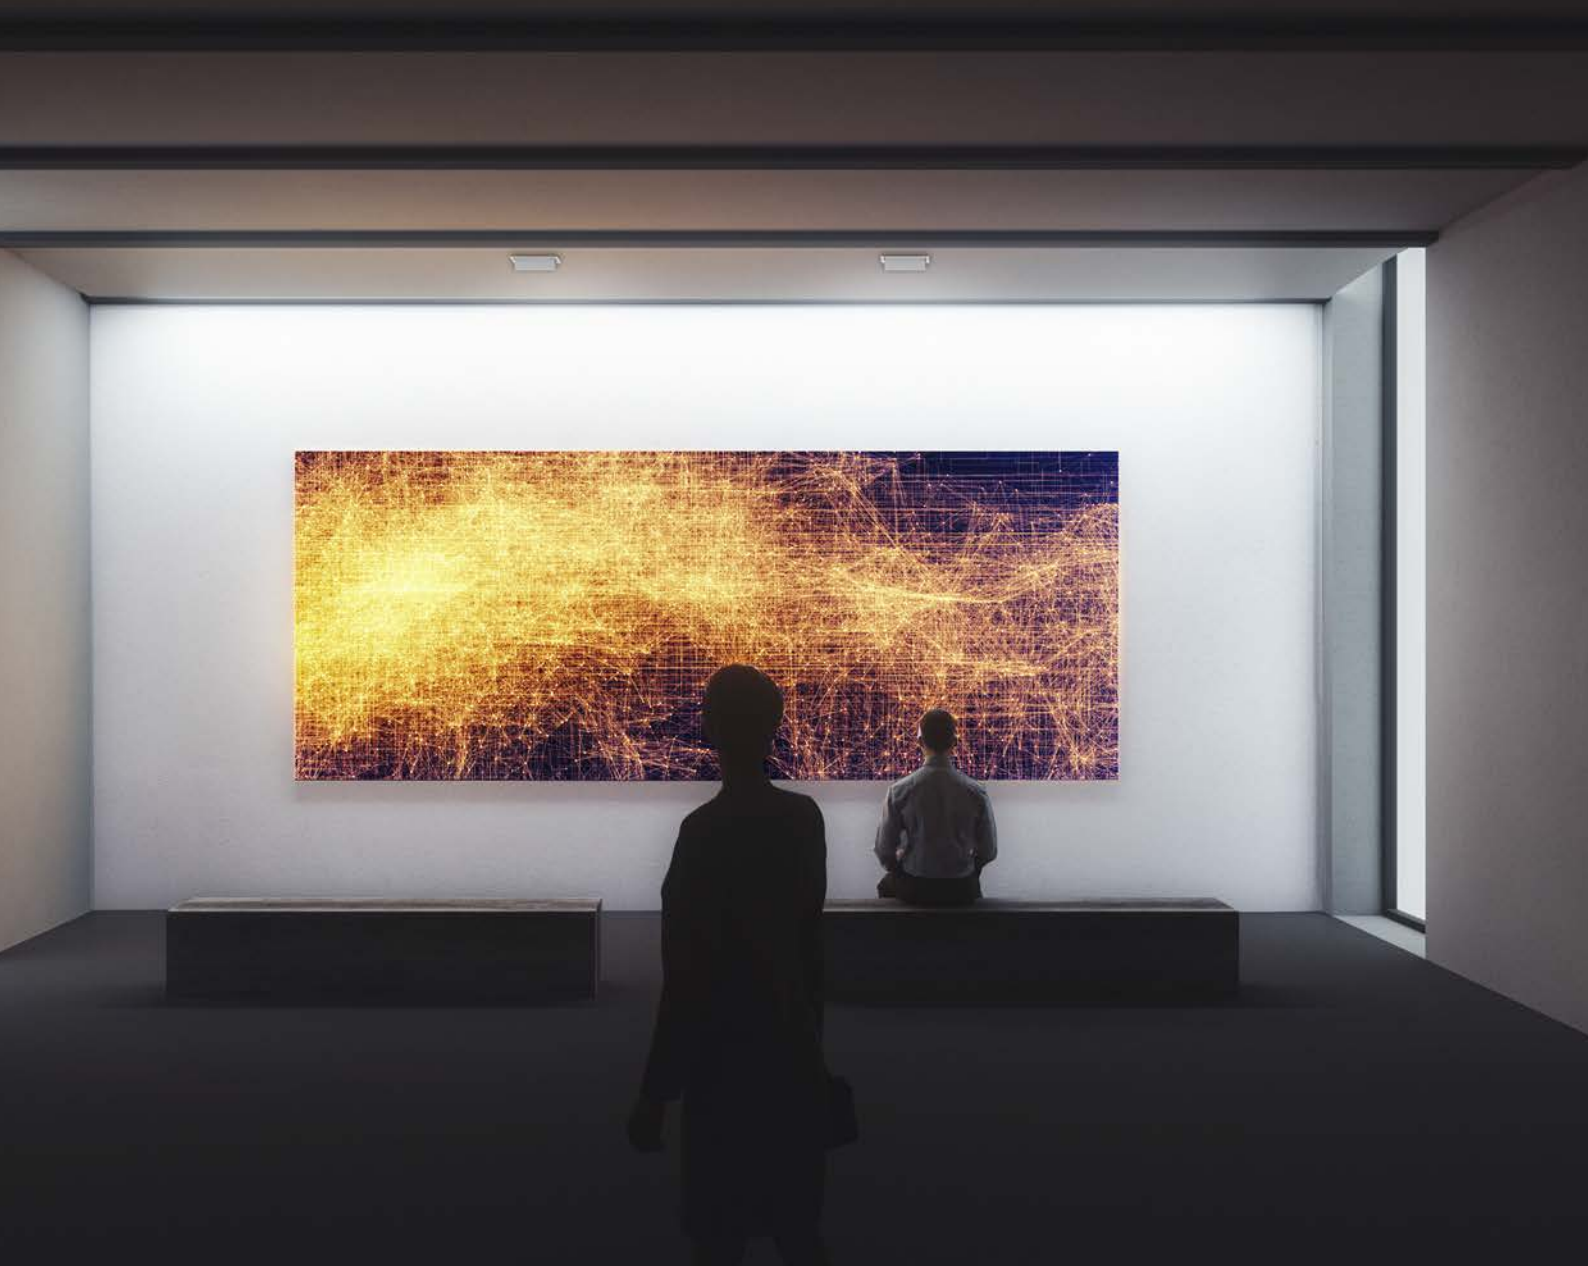

With special designed reflector, allowing the fixture to evenly light up 3 meters height wall.

SHELL-T track lights
wallwash

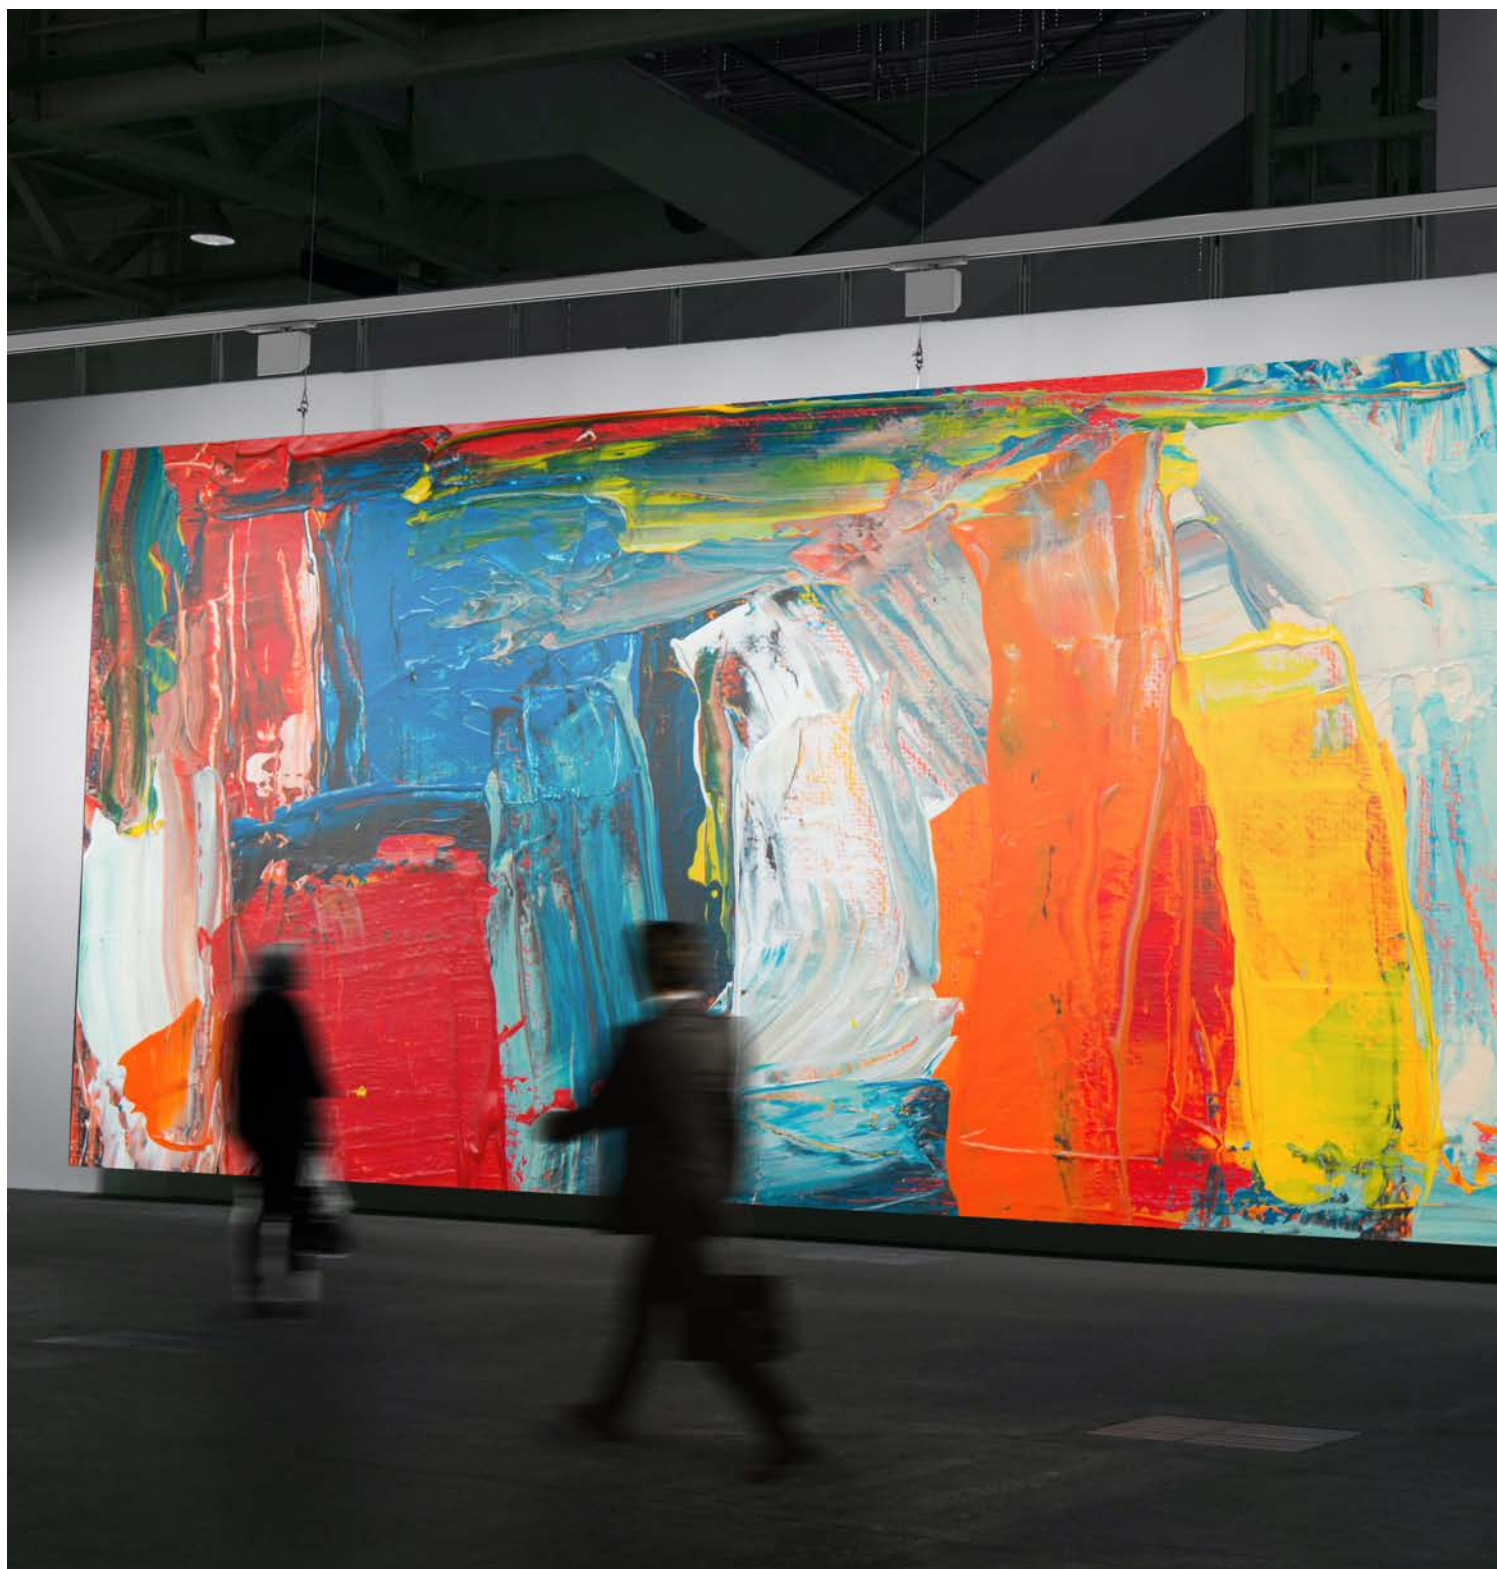



Another type of reflector allowing fixture to evenly light up 5 meters wall.

SHELL-T track lights

wallwash



Specification

2700 K, 3000 K, 4000 K,

CRI $\geq$ 90

SHELL-T 25W to 2116 lm

(3000 K) 25W to 2232 lm


25W to 2033 lm

42W to 2972 lm

42W to 3235 lm

42W to 2839 lm

Types



Colours

Body :  
Black White

Beam Angle



A modern interior space featuring a large, vibrant green living wall on the right side. The ceiling is white with two parallel black track lighting systems, each with several adjustable spotlights. The floor is a light-colored, highly reflective material. In the foreground, there are several tables and chairs: some are round with dark, fluted legs and upholstered chairs, while others are square with dark legs and modern, curved chairs. In the background, there is a large glass wall or window that looks out onto a cityscape. The overall atmosphere is clean, bright, and contemporary.

SHELL

Track Lights
Wallwash

The Wall wash light can be used for green beautification of the planting wall display, large area of light to maintain the beautiful growth of indoor plants.

SHELL-T-SF1






Article number	2219.200
LED Consumption	25W
Current	700 (mA)
Voltage	220-240VAC
Delivered lumen	2116 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Shelf floor wallwash



Dimmable

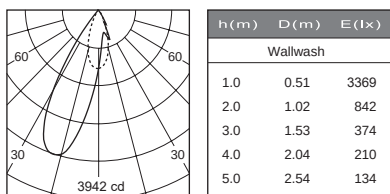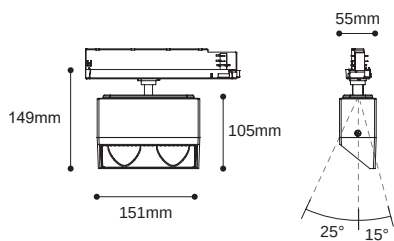

SHELL-T-HC1






Article number	2219.200A
LED Consumption	25W
Current	700 (mA)
Voltage	220-240VAC
Delivered lumen	2232 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

High ceiling wallwash



Dimmable

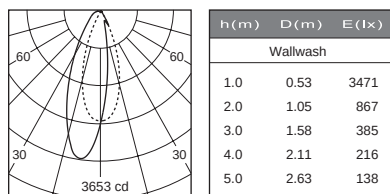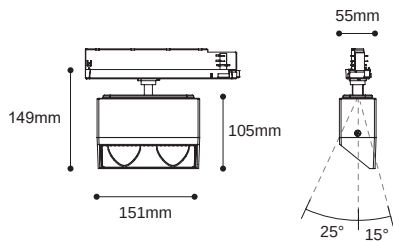

SHELL-T-W1






Article number	2219.200B
LED Consumption	25W
Current	700 (mA)
Voltage	220-240VAC
Delivered lumen	2033 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Wide wallwash



Dimmable

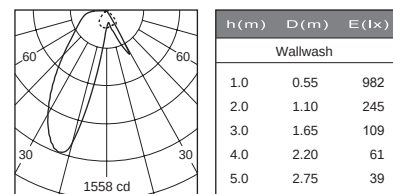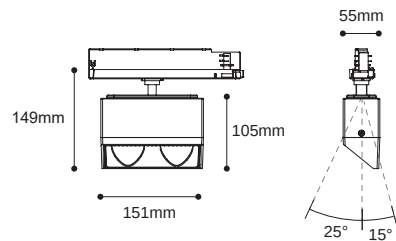

SHELL-T-SF2






Article number	2119.204
LED Consumption	42W
Current	1050 (mA)
Voltage	220-240VAC
Delivered lumen	2972 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Shelf floor wallwash



Dimmable

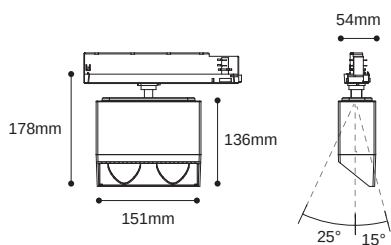

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.51	4482
2.0	1.02	1120
3.0	1.54	498
4.0	2.05	280
5.0	2.56	179

SHELL-T-HC2






Article number	2119.204A
LED Consumption	42W
Current	1050 (mA)
Voltage	220-240VAC
Delivered lumen	3235 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

High ceiling wallwash



Dimmable

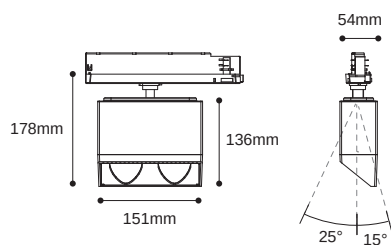

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.53	5043
2.0	1.06	1261
3.0	1.59	560
4.0	2.12	315
5.0	2.65	201

SHELL-T-W2






Article number	2119.204B
LED Consumption	42W
Current	1050 (mA)
Voltage	220-240VAC
Delivered lumen	2839 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Wide wallwash




Dimmable

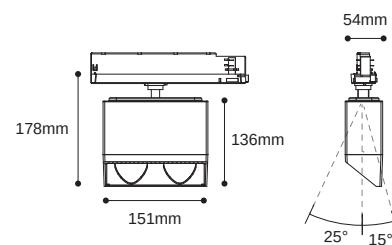

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.56	1356
2.0	1.12	339
3.0	1.68	150
4.0	2.24	84
5.0	2.80	54

SHELL-D recessed downlights

wallwash

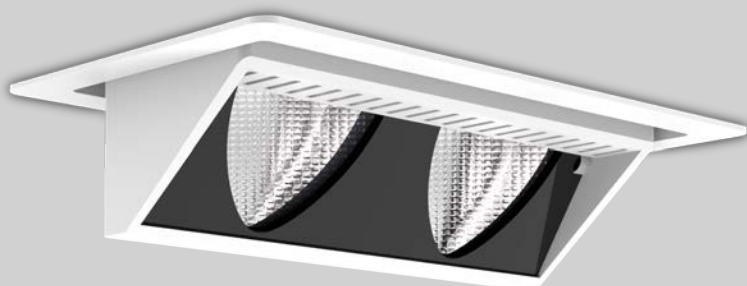

Specification

2700 K, 3000 K, 4000 K,

CRI $\geq$ 90

SHELL-D 25W to 2116 lm

(3000 K) 25W to 2207 lm


25W to 2010 lm

33W to 2690 lm

33W to 2816 lm

33W to 2660 lm

Types

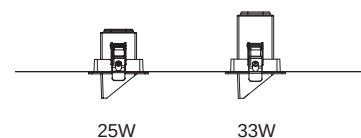

Colours

Body :  
Black White

Beam Angle

 Shelf floor
Wallwash
(Reflector)

 High ceiling
Wallwash
(Reflector)

 Wide
Wallwash
(Reflector)



SHELL-D-SF1






Article number	2214.405
LED Consumption	25W
Current	700 (mA)
Delivered lumen	2116 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Shelf floor wallwash



Dimmable

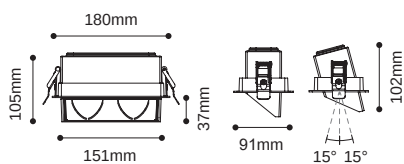

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.51	3369
2.0	1.02	842
3.0	1.53	374
4.0	2.04	210
5.0	2.54	134

SHELL-D-HC1






Article number	2214.405A
LED Consumption	25W
Current	700 (mA)
Delivered lumen	2207 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

High ceiling wallwash



Dimmable

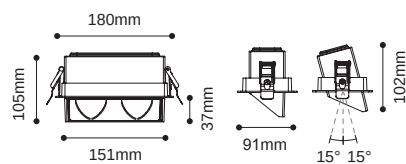

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.53	3449
2.0	1.06	862
3.0	1.58	383
4.0	2.11	215
5.0	2.64	138

SHELL-D-W1






Article number	2214.405B
LED Consumption	25W
Current	700 (mA)
Delivered lumen	2010 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Wide wallwash



Dimmable

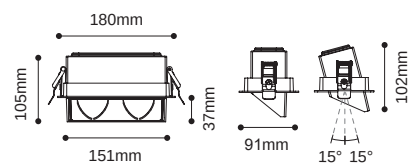

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.55	975
2.0	1.11	243
3.0	1.66	108
4.0	2.21	60
5.0	2.77	39

SHELL-D-SF2






Article number	2114.429
LED Consumption	33W
Current	900 (mA)
Delivered lumen	2690 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Shelf floor wallwash



Dimmable

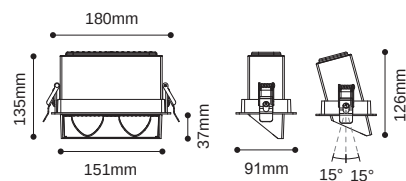

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.56	4380
2.0	1.13	1095
3.0	1.69	486
4.0	2.25	273
5.0	2.82	175

SHELL-D-HC2






Article number	2114.429A
LED Consumption	33W
Current	900 (mA)
Delivered lumen	2816 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

High ceiling wallwash



Dimmable

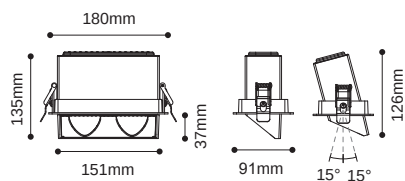

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.53	4474
2.0	1.06	1118
3.0	1.58	497
4.0	2.11	279
5.0	2.64	179

SHELL-D-W2






Article number	2114.429B
LED Consumption	33W
Current	900 (mA)
Delivered lumen	2660 (lm)
Beam Angle	Wallwash (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White

Wide wallwash



Dimmable

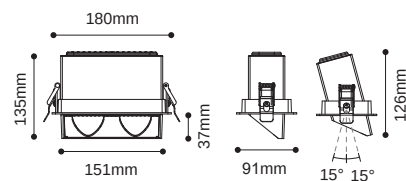

h(m)	D(m)	E(lx)
Wallwash		
1.0	0.50	1214
2.0	0.99	303
3.0	1.49	134
4.0	1.98	75
5.0	2.48	48