

LOTUS SERIES (EU)



LOTUS (EU)

The conical-shaped design of the LOTUS fixtures and its deeper placed light source make sure that glare is reduced to a minimum . LOTUS has 3 different beam angles to choose from and can be fixed or adjustable, offering LED and halogen solutions. The small trim gives a refined touch to this elegant luminaire.

Material: Aluminum forging heatsink with anodized black finish, aluminum die casting trim with powder coating finish.

Application: Residential, shopping mall, shop, hotel room, restaurant & bar, museum,art gallery, showroom, office.

Shape



Round
80

Square
80

Round
100

Mountings



Recessed
Trim

Light distributions



Downlight

Adjustable



ACOT-35
6° Ultra narrow beam
10W Heatsink



ACOT-36
14W Heatsink



ACOT-35-WCW
Tunable White
9W Heatsink



ACOT-35-DW
Dim to warm
12W Heatsink



ACOT-37
18W Heatsink

Exchangeable light engine
CRI 90
2700 or 3000 or 4000 Kelvin



Lens
For ACOT-36 or ACOT-37
ACOT-76-15R
ACOT-76-24R
ACOT-76-36R
ACOT-76-50R

For ACOT-35-WCW or ACOT35-DW
ACOE-1 (13R)
ACOE-3 (31R)



Accessories
SG7-1 Striped glass
WG7-1 Woven glass
DS7-1 Diffusion sheet
H7-1 Honeycomb louver



Round or Square
Trim



LT80-TRF
Fixed



LT80-TSF
Fixed



LT100-TRA
Adjustable



Material
Aluminum die cast

LOTUS (EU)





LOTUS-80-RTF




Article number	2118.524-ACOT-35
LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	6° (Lens)
CCT	3000K
CRI	90+
Article number	2118.524-ACOT-36
LED Consumption	14W
Current	350 (mA)
Delivered Lumen	985 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



LOTUS-80-STF






Article number	2118.525-ACOT-35
LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	6° (Lens)
CCT	3000K
CRI	90+
Article number	2118.525-ACOT-36
LED Consumption	14W
Current	350 (mA)
Delivered Lumen	965 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable



LOTUS-100-RTA





Article number	2118.523-ACOT-35
LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	6° (Lens)
CCT	3000K
CRI	90+
Article number	2118.523-ACOT-36
LED Consumption	14W
Current	350 (mA)
Delivered Lumen	975 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Colours  
Black White



Dimmable

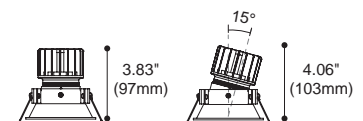

Accessories



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet



WG7-1
Woven glass