

MOON SERIES (EU)




MOON (EU)

This multifunctional panel light is perfect for various spatial needs, offering three installation options: track-mounted, ceiling-suspended, and flush-mounted, making it adaptable to different interior styles. The light is available in three sizes—200mm, 300mm, and 400mm—suitable for both small corner lighting and larger area illumination.

The hanging version has a uniquely designed panel that can swing 45 degrees in one direction and even tilt up to 90 degrees on the other, allowing for flexible light direction to suit any preference. The suspension lever is available in three lengths to adjust the height of the lamp for different use spaces.

Equipped with a high-efficiency diffuser, this panel light ensures even and high efficient light distribution up to 110-120 lm/w, enhancing the quality of illumination throughout the space, making it an ideal lighting choice.

"MOON" will be the focal point of a office,hospital,hotel lobbies and public space.

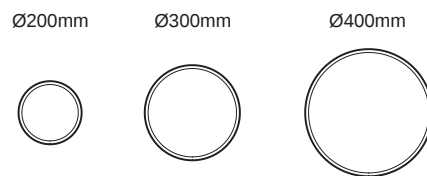

Track



Surface mounted
Pendant




Surface mounted





Colours
Body : Black ☒ White ☐

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI
☐	2413.111A	9W	500 mA	1300 lm	1127 lm	110°	4000K	80+
						Driver Built-in	 IP20	112 lm/W
☐	2413.111B	15W	450 mA	2405 lm	2100 lm	110°	4000K	80+
						Driver Built-in	 IP20	119 lm/W
☐	2413.111C	20W	600 mA	3312 lm	2891 lm	110°	4000K	80+
						Driver Built-in	 IP20	127 lm/W

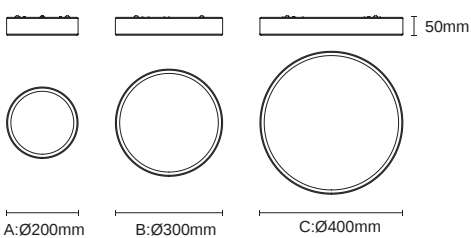






Colours

Body : Black ☒ White ☐

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI		
○	2416.302A-P6	9W	500 mA	1300 lm	1127 lm	110°	4000K	80+		
	2416.302A-P12	9W	500 mA	1300 lm	1127 lm	110°	4000K	80+		
	2416.302A-P24	9W	500 mA	1300 lm	1127 lm	110°	4000K	80+		
○	Driver Built-in									
	2416.302B-P6	15W	450 mA	2405 lm	2100 lm	110°	4000K	80+		
	2416.302B-P12	15W	450 mA	2405 lm	2100 lm	110°	4000K	80+		
	2416.302B-P24	15W	450 mA	2405 lm	2100 lm	110°	4000K	80+		
○	Driver Built-in									
	2416.302C-P6	20W	600 mA	3312 lm	2891 lm	110°	4000K	80+		
	2416.302C-P12	20W	600 mA	3312 lm	2891 lm	110°	4000K	80+		
	2416.302C-P24	20W	600 mA	3312 lm	2891 lm	110°	4000K	80+		
	Driver Built-in									

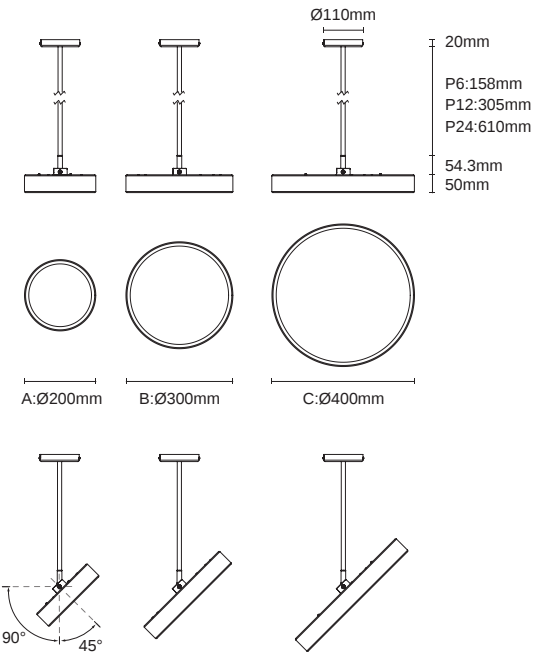





Colours

Body : Black ☒ White ☐

	Article number	LED Consumption	Current	LED Lumen	Delivered Lumen	Beam Angle	CCT	CRI		
○	2416.201A-P6	9W	500 mA	1300 lm	1127 lm	110°	4000K	80+		
	2416.201A-P12	9W	500 mA	1300 lm	1127 lm	110°	4000K	80+		
	2416.201A-P24	9W	500 mA	1300 lm	1127 lm	110°	4000K	80+		
Driver Built-in										
○	2416.201B-P6	15W	450 mA	2405 lm	2100 lm	110°	4000K	80+		
	2416.201B-P12	15W	450 mA	2405 lm	2100 lm	110°	4000K	80+		
	2416.201B-P24	15W	450 mA	2405 lm	2100 lm	110°	4000K	80+		
Driver Built-in										
○	2416.201C-P6	20W	600 mA	3312 lm	2891 lm	110°	4000K	80+		
	2416.201C-P12	20W	600 mA	3312 lm	2891 lm	110°	4000K	80+		
	2416.201C-P24	20W	600 mA	3312 lm	2891 lm	110°	4000K	80+		
Driver Built-in										

