




SHELL-S-14-TW



Product specification

INTERIOR RECESSED DOWNLIGHTS

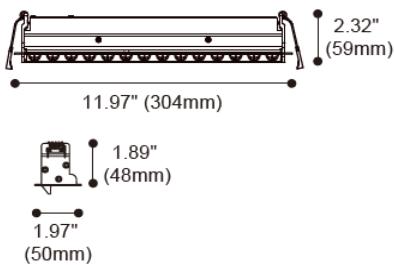
 292
40

Technical Specification

Article number	2114.418B-AM
----------------	--------------

LED Consumption	15W
-----------------	-----

Fixture Consumption	17W
---------------------	-----

Current / Voltage	350mA / 43.4V
-------------------	---------------

CRI	90+
-----	-----

CCT	3000K
-----	-------

LED Lumen *1	-
--------------	---

Delivered Lumen	760lm
-----------------	-------

Beam Angle available	Wallwash
----------------------	----------

Driver Technical Specification (Remoted)

Driver Brand	EUCHIPS	Driver Model	PUP20A-1WMC
--------------	---------	--------------	-------------

Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	350mA / 9-45Vdc
--------------------------------	----------------------	--------------------------	-----------------


Dimming / Flicker	0/1-10V Dimming	Certification	UL / ENEC / FCC
-------------------	-----------------	---------------	-----------------

Power Factor	>0.9	Warranty	-
--------------	------	----------	---

Technical character		Materials	
Products Standard	UL1598	Luminaire	extruded aluminum
		Trim	extruded aluminum
Insulation	CLASS I	Reflector	PC
Protection	Damp Location	Heat sink	extruded aluminum
Tilt / Rotate	non / non	Fixture color available	white / black
Operating temperature	0~35°C		
Average Failure Time	L70(6k) >36000 (h)		

Accessories

Photometric



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.01	588
2.0	2.03	147
3.0	3.04	65
4.0	4.05	36
5.0	5.06	23

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.