




SHELL-S-21-TW



Product specification

INTERIOR RECESSED DOWNLIGHTS

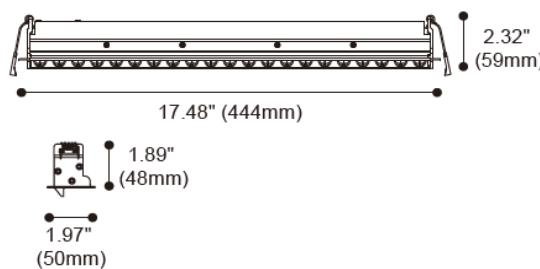432
40

Technical Specification

Article number	2114.418C-AM
LED Consumption	22W
Fixture Consumption	24W
Current / Voltage	500mA / 43.4V
CRI	90+
CCT	3000K
LED Lumen ¹	-
Delivered Lumen	1091lm
Beam Angle available	Wallwash


Driver Technical Specification (Remoted)

Driver Brand	ERP	Driver Model	PSB50W-0850-56
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	500mA / 36-56Vdc
Dimming / Flicker	0-10V Dimming	Certification	UL / ENEC / FCC / CE / CB
Power Factor	>0.9	Warranty	5 years

Technical character		Materials	
Products Standard	UL1598	Luminaire	extruded aluminum
		Trim	extruded aluminum
Insulation	CLASS I	Reflector	PC
Protection	Damp Location	Heat sink	extruded aluminum
Tilt / Rotate	non / non	Fixture color available	white / black
Operating temperature	0~35°C		
Average Failure Time	L70(6k) >36000 (h)		

Accessories

Photometric



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.98	805
2.0	1.97	201
3.0	2.96	89
4.0	3.95	50
5.0	4.94	32

Remarks

